

Lawrence Berkeley National Laboratory

Lawrence Berkeley National Laboratory

Title

Development and evaluation of fully automated demand response in large facilities

Permalink

<https://escholarship.org/uc/item/4r45b9zt>

Authors

Piette, Mary Ann
Sezgen, Osman
Watson, David S.
et al.

Publication Date

2004-03-30

**DEVELOPMENT AND EVALUATION OF
FULLY AUTOMATED DEMAND RESPONSE
IN LARGE FACILITIES**

PIER COLLABORATIVE REPORT





Prepared By: Mary Ann Piette
Lawrence Berkeley National Laboratory
Berkeley, California

Contract No. 150-99-003

Prepared For:
California Energy Commission
Public Interest Energy Research (PIER) Program

Laurie tenHope
Contract Manager

Laurie tenHope
Program Area Team Lead

Ron Kukulka,
Acting Deputy Director
ENERGY RESEARCH AND DEVELOPMENT
DIVISION

Robert L. Therkelsen
Executive Director

The work described in this report was coordinated by the Consortium for Electric Reliability Technology Solutions and funded by the California Energy Commission, Public Interest Energy Research Program, under Work for Others Contract No. 150-99-003, Am #1 and by the U.S. Department of Energy under Contract No. DE-AC03-76SF00098.

DISCLAIMER

This report was prepared as the result of work sponsored by the California Energy Commission. It does not necessarily represent the views of the Energy Commission, its employees or the State of California. The Energy Commission, the State of California, its employees, contractors and subcontractors make no warrant, express or implied, and assume no legal liability for the information in this report; nor does any party represent that the uses of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the California Energy Commission nor has the California Energy Commission passed upon the accuracy or adequacy of the information in this report.

PREFACE

The Public Interest Energy Research (PIER) Program supports public interest energy research and development that will help improve the quality of life in California by bringing environmentally safe, affordable, and reliable energy services and products to the marketplace.

The PIER Program, managed by the California Energy Commission (Commission), annually awards up to \$62 million to conduct the most promising public interest energy research by partnering with Research, Development, and Demonstration (RD&D) organizations, including individuals, businesses, utilities, and public or private research institutions.

- PIER funding efforts are focused on the following six RD&D program areas:
- Buildings End-Use Energy Efficiency
- Industrial/Agricultural/Water End-Use Energy Efficiency
- Renewable Energy
- Environmentally-Preferred Advanced Generation
- Energy-Related Environmental Research
- Strategic Energy Research.

What follows is the final report for the Building Vulnerability Guide, 500-01-034, conducted by the Lawrence Berkeley National Laboratory. The report is entitled Building Vulnerability Assessment and Mitigation. This project contributes to the Buildings Program.

For more information on the PIER Program, please visit the Commission's Web site at: <http://www.energy.ca.gov/research/index.html> or contact the Commission's Publications Unit at 916-654-5200.

Full LBNL Disclaimer

DISCLAIMER

This document was prepared as an account of work sponsored by the United States Government. While this document is believed to contain correct information, neither the United States Government nor any agency thereof, nor The Regents of the University of California, nor any of their employees, makes any warranty, express or implied, or assumes any legal responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by its trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or The Regents of the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof, or The Regents of the University of California.

Ernest Orlando Lawrence Berkeley National Laboratory is an equal opportunity employer.

Abbreviated LBNL Disclaimer (place under CEC disclaimer)

This work was also supported by the Assistant Secretary for Energy Efficiency and Renewable Energy, Building Technologies Program, of the US Department of Energy under Contract No. DE-AC03-76SF00098.

Development and Evaluation of Fully Automated Demand Response In Large Facilities

March 30, 2004

**Mary Ann Piette
Osman Sezgen
David S. Watson
Naoya Motegi
Lawrence Berkeley National Laboratory**

**Christine Shockman
Shockman Consulting**

**Laurie ten Hope
Program Manager, Energy Systems Integration**

Sponsored by the California Energy Commission

Table of Contents

Table of Contents	i
List of Tables and Figures	ii
Acknowledgements	v
EXECUTIVE SUMMARY	E-1
1. Introduction	1
1-1 Background and Report Overview	1
1-2 Project Goals	2
1-3 Previous Research	3
2. Methodology	7
2-1 Project Overview and Timeline	7
2-2 Selection Criteria and Sites Considered	8
2-3 Site Characteristics and Background	9
2-4 Automated Demand Response System Description	15
2-5 Controls and Communications Upgrades	18
2-6 Electric Price Signal and Test Description	19
2-7 Assessment of Lead Users of Auto-DR	20
3. Auto-DR Systems Characterization and Measurement	23
3-1 Auto-DR System Architecture	23
3-2 Site Measurement and Evaluation Techniques	44
4. Results	50
4-1 Requesting and Confirming Receipt of Signal	50
4-2 Demand Shed Savings Estimates	50
5. Discussion: Organizational and Technological Issues	72
5-1 Implementation and Organizational Challenges	72
5-2 Overview of Technical Challenges	73
5-3 Lessons from each Site	74
5-4 State of the Art Auto-DR Systems	77
6. Summary and Future Research Topics	80
7. References	84

APPENDICES

Appendix I.	Acronyms and Terminology	I-1
Appendix II.	Methodology – Additional Details	II-1
Appendix II-1.	Whole-Building Level Method, Additional Detail	II-1
Appendix III.	Sample Memorandum of Understanding	III-1
Appendix III-1.	Project Participant Memorandum of Understanding	III-1
Appendix III-2.	Automated Demand Response Test Questionnaire	III-4
Appendix III-3.	Time Schedule for Demand Response Test Participants	III-6
Appendix III-4.	Price Signal for the Automated Demand Responses Tests	III-7

Appendix III-5.	RT Pricing Web Methods and XML Schema	III-10
Appendix IV.	Participants List	IV-1
Appendix V.	Site Questionnaires (Test 1, Test 2)	V-1
Appendix V-1.	Site Questionnaires – Albertsons	V-1
Appendix V-2.	Site Questionnaires – Bank of America	V-3
Appendix V-3.	Site Questionnaires – GSA Oakland	V-5
Appendix V-4.	Site Questionnaires – Roche	V-8
Appendix V-5.	Site Questionnaires – UCSB	V-10
Appendix VI.	Site Data Collection Points List	VI-1
Appendix VI-1.	Albertsons – Point List	VI-1
Appendix VI-2.	Bank of America – Point List	VI-1
Appendix VI-3.	GSA Oakland – Point List	VI-3
Appendix VI-4.	Roche – Point List and Fan Spot Measurement Plan	VI-5
Appendix VI-5.	UCSB – Shed Strategies and Point List	VI-9
Appendix VII.	Additional Result Tables and Figures	VII-1
Appendix VII-1.	First Day Test Results	VII-1
Appendix VII-2.	B of A – Result Analysis by WebGen	VII-5
Appendix VII-3.	GSA – Additional Figures	VII-7
Appendix VII-4.	Roche – Additional Figures	VII-17
Appendix VII-5.	UCSB – Additional Figures	VII-19
Appendix VIII.	Previous DR Participation and Site Contact	VIII-1
Appendix VIII-1.	Prior Demand Response Program Participation	VIII-1
Appendix VIII-2.	Interaction with Site Contacts	VIII-4
Appendix VIII-3.	Problems Encountered During Test Period	VIII-8

List of Tables and Figures

<u>Table 2-1.</u>	<u>Project Timeline and Milestones</u>	<u>7</u>
<u>Table 2-2.</u>	<u>Summary of Sites</u>	<u>10</u>
<u>Table 3-1.</u>	<u>Characteristics of Auto-DR Systems - Architecture</u>	<u>24</u>
<u>Table 3-2.</u>	<u>Characteristics of Auto-DR Systems - Gateways</u>	<u>25</u>
<u>Table 3-3.</u>	<u>Characteristics of Auto-DR Systems - Integration</u>	<u>28</u>
<u>Table 3-4.</u>	<u>Characteristics of Auto-DR Systems - Shed Control</u>	<u>29</u>
<u>Table 3-5.</u>	<u>Characteristics of Auto-DR Systems - Open Standards</u>	<u>30</u>
<u>Table 3-6.</u>	<u>Oakland GSA Zone Temperature Setpoints - Normal and Shed Modes ..</u>	<u>37</u>
<u>Table 3-7.</u>	<u>Measurement Summary</u>	<u>44</u>
<u>Table 3-8.</u>	<u>Component Level Methods for Each Component</u>	<u>48</u>
<u>Table 4-1.</u>	<u>Record of Prices Being Requested and Receipt Being Confirmed</u>	<u>50</u>
<u>Table 4-2.</u>	<u>Shed Strategies and Results of Response</u>	<u>51</u>
<u>Table 4-3.</u>	<u>UCSB –Estimated Savings by Component (Component Method)</u>	<u>65</u>
<u>Table 4-4.</u>	<u>Summary of Estimated Savings of All Site (Whole-Building Method) ...</u>	<u>68</u>

Table 4-5.	Summary of Estimated Savings of All Site (Component Method)	68
Figure E-1.	Fictitious Electric Price Signal Sent to Five Facilities	2
Figure E-2.	Geographical Location of Auto-DR Infrastructure	3
Figure E-3.	Auto-DR Electric Load Shed from five sites on Wed. Nov. 19, 2003.	3
Figure E-4.	Auto-DR Electric Load Shed from five sites on Wed. Nov. 19, 2003.	4
Figure 1-1.	Overlap Between Energy Information Systems (EIS), Energy Management Control Systems (EMCS) and Demand Response Systems (DRS)	5
Figure 2-1.	Albertsons	11
Figure 2-2.	Bank of America - Concord Data Center, Building B	12
Figure 2-3.	GSA Oakland Federal Building	12
Figure 2-4.	Roche Palo Alto – Building FS (left) and A2 (right)	13
Figure 2-5.	UCSB – Davidson Library	14
Figure 2-6.	Auto-DR Network Communications Sequence	15
Figure 2-7.	Geographical Location of Auto-DR Infrastructure	16
Figure 2-8.	Test 1 Price Signal (November 12th, 2003)	20
Figure 2-9.	Test 2 Price Signal (November 19th, 2003)	20
Figure 3-1.	Network architecture overview of five combined Auto-DR sites	26
Figure 3-2.	Albertsons – System Architecture	32
Figure 3-3.	B of A – System Architecture	35
Figure 3-4.	GSA Oakland – System Architecture	38
Figure 3-5.	Roche – System Architecture	41
Figure 3-6.	UCSB – System Architecture	43
Figure 3-7.	Example of Whole-Building Method Baseline	47
Figure 3-8.	Example of Component Method Baseline - Roche	49
Figure 4-1.	Albertsons – Whole Building Power and Baseline (Whole-Building Method)	52
Figure 4-2.	Albertsons – Whole Building Power and Savings (Component Method)	53
Figure 4-3.	Albertsons – Overhead Lights and Anti-Sweat Door Heaters	54
Figure 4-4.	B of A – Whole Building Power and Baseline (Whole-Building Method)	55
Figure 4-5.	B of A – Motor Control Center	55
Figure 4-6.	B of A – WebGen Chart	56
Figure 4-7.	GSA – Whole Building Power and Baseline (Whole-Building Method)	57
Figure 4-8.	GSA – HVAC Demand and Savings (Component Method)	58
Figure 4-9.	GSA – HVAC Component Demand	58
Figure 4-10.	GSA – Zone Temperature	60
Figure 4-11.	Roche – Combined Whole Building Power and Baseline (Whole-Building Method applied to all Three Buildings)	61
Figure 4-12.	Roche – Whole Building, Fan Power and Savings (Component Method)	62
Figure 4-13.	Roche – Building A2, Zone Temperature	62
Figure 4-14.	Roche – Building A2, CO₂ Concentration	63
Figure 4-15.	UCSB – Whole Building Power and Baseline (Whole-Building Method)	64
Figure 4-16.	UCSB – Whole Building Power, Cooling Energy and Savings (Component Method)	65

<u>Figure 4-17.</u>	<u>UCSB – Fan Power and Savings</u>	66
<u>Figure 4-18.</u>	<u>UCSB – Average Zone Temperature</u>	67
<u>Figure 4-19.</u>	<u>Average Shed kW by Price Signal Level (Component Method)</u>	69
<u>Figure 4-20.</u>	<u>Average Shed W/ft² by Price Signal Level (Component Method)</u>	69
<u>Figure 4-21.</u>	<u>Summary of All Sites</u>	70
<u>Figure 4-22.</u>	<u>Saving Estimates by Whole-Building Method and Component Method</u> ..	71

Acknowledgements

The authors are grateful for the extensive support from numerous individuals who assisted in this project, including: Ron Hofmann, a consultant to the California Energy Commission (CEC), for his conceptualization of this project and ongoing technical support; Laurie ten Hope (CEC); Gaymond Yee (California Institute for Energy and the Environment); George Hernandez; and Karen Herter (Lawrence Berkeley National Laboratory). This project is supported by the Assistant Secretary for Energy Efficiency and Renewable Energy, Office of Building Technology, State and Community Programs of the U.S. Department of Energy under Contract No. DE-AC03-76SF00098. This project could not have been completed without the extensive assistance from the following building owners, managers, and technology developers:

Albertsons	Glenn Barrett, Mike Water, Ed Lepacek
Chevron Energy Services	Bruce Dickinson
Engage/eLutions	Paul Sheppard, Tom Pappas, John Kuhl, Jagdish Dudhat
Infotility	Joe Desmond and Nicolas Kardas
Itron	Dale Fong
Jones Lang LaSalle	Don Rudy, John Schinter, Steven Press, William Young, Kent Anderson
Roche Palo Alto	Jerry Meek, Jeff Stamp
United States General Services Administration	Edgar Gray, John Goins, Stephen May, Mark Levi, Jan Wright
United States Postal Service	Ray Levinson and John Samuelson
University of California, Santa Barbara	Jim Dewey
WebGen Systems, Inc.	Dirk Mahling, Bob Landry, Glenn Miller
West Valley Electric, Aztec	Cory Timms, Dean Cromwell
Yamas Controls, Inc.	Janey Kaster, Ken Mason, Jason Doll

DISCLAIMER

This report was prepared as a result of work sponsored by the California Energy Commission (Commission). It does not necessarily represent the views of the Commission, its employees, or the State of California. The Commission, the State of California, its employees, contractors, and subcontractors make no warranty, express or implied, and assume no legal liability for the information in this report, nor does any party represent that the use of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the Commission nor has the Commission passed upon the accuracy or adequacy of the information in this report.

EXECUTIVE SUMMARY

Introduction and Goals

This report describes the results of a research project to develop and evaluate the performance of new Automated Demand Response (Auto-DR) hardware and software technology in large facilities. Demand Response (DR) is a set of activities to reduce or shift electricity use to improve electric grid reliability, manage electricity costs, and ensure that customers receive signals that encourage load reduction during times when the electric grid is near its capacity. The two main drivers for widespread demand responsiveness are the prevention of future electricity crises and the reduction of electricity prices. Additional goals for price responsiveness include equity through cost of service pricing, and customer control of electricity usage and bills. The technology developed and evaluated in this report could be used to support numerous forms of DR programs and tariffs.

For the purpose of this report, we have defined three levels of Demand Response automation. **Manual Demand Response** involves manually turning off lights or equipment; this can be a labor-intensive approach. **Semi-Automated Response** involves the use of building energy management control systems for load shedding, where a pre-programmed load shedding strategy is initiated by facilities staff. **Fully-Automated Demand Response** is initiated at a building or facility through receipt of an external communications signal – facility staff set up a pre-programmed load shedding strategy which is automatically initiated by the system without the need for human intervention. We have defined this approach to be **Auto-DR**. An important concept in Auto-DR is that a facility manager is able to “opt out” or “override” an individual DR event if it occurs at a time when the reduction in end-use services is not desirable.

This project sought to improve the feasibility and nature of Auto-DR strategies in large facilities. The research focused on technology development, testing, characterization, and evaluation relating to Auto-DR. This evaluation also included the related decision-making perspectives of the facility owners and managers. Another goal of this project was to develop and test a real-time signal for automated demand response that provided a common communication infrastructure for diverse facilities. The six facilities recruited for this project were selected from the facilities that received CEC funds for new DR technology during California’s 2000-2001 electricity crises (AB970 and SB-5X).

Automated-DR Test Concept

A significant goal of this research was to perform a two-week test of fully automated DR test at four to six facilities. We worked with each facility’s staff to develop a demand response strategy that would result in a larger electric load shed at higher electricity prices. The test consisted of providing a single fictitious continuous electric price signal to each facility. The technology used for the communications is known as Extensible Markup Language (XML) with “Web services.” Control and communications systems at each site were programmed to check the latest electricity price published by the price

server and automatically act upon that signal. All of the facilities had Energy Information Systems (EIS) and Energy Management and Control Systems (EMCS) that were programmed to automatically begin shedding demand when the price rose from \$0.10/kWh to \$0.30/kWh. The second level price signal increased to \$0.75/kWh. Five sites participated in the test. The test kept the fictitious prices elevated for three hours. Figure E-1 shows the price signal sent on Wednesday, November 19th, 2003.

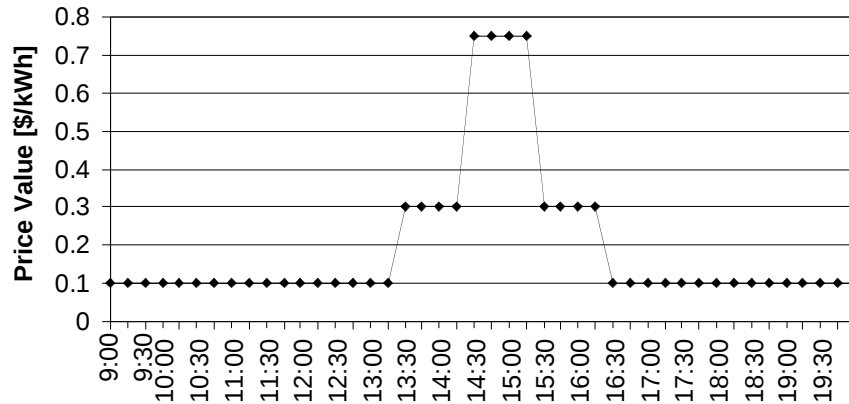


Figure E-1. Fictitious Electric Price Signal Sent to Five Facilities

The sites in the test, listed below with their control and communication systems, represent a diverse set of facilities, control and communications systems, utilities, ownership types, and DR strategies:

- Supermarket - Albertsons, Engage Networks/eLutions - Active Energy Management™
- Office - Bank Of America, WebGen - Intelligent Use of Energy™
- Office - General Services Administration, BACnet Reader and BACnet controller
- Office and Cafeteria - Roche Pharmaceuticals, Tridium - Vykon™
- Library - UC Santa Barbara, Itron - Enterprise Energy Management Suite™

Figure E-2 shows the geographic distribution of the test sites, the location of the price server and clients, and the location of the development sites from the different system developers. LBNL developed detailed description of the controls and communications infrastructure at each site. In a related effort and to prepare for the test, LBNL developed measurement plans at each site to measure both the whole-facility electric load shed, and component electric load shed. The controls and communications systems developed for the test were also used to measure the sheds. A series of methods to evaluate the sheds were developed based on each site's energy and performance measurements. Non-energy changes in building services were also evaluated at three sites. Extensive interviews of the test participants were conducted to evaluate any disruptions that took place as a result of the test, to understand the technical requirements for the technology implementation, and to gather information on their perspective on DR.

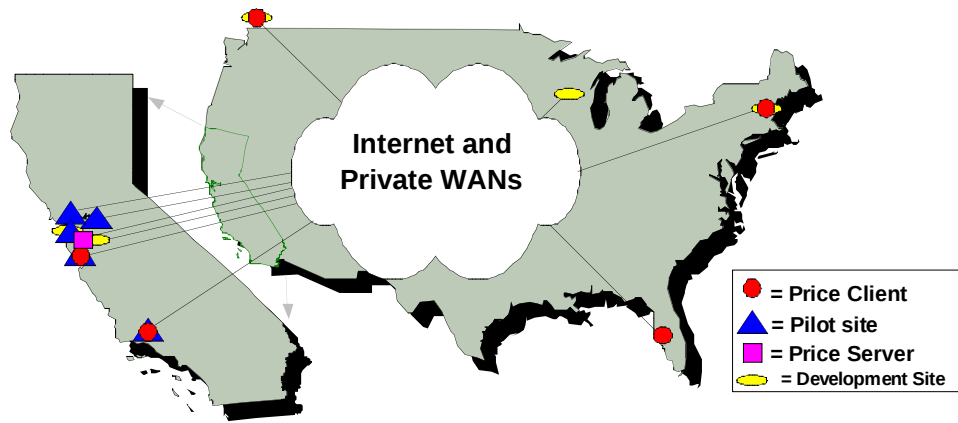


Figure E-2. Geographical Location of Auto-DR Infrastructure

Test Results

The two-week test period began on Monday, November 10, 2003. LBNL sent the first fictitious high price signal on Wednesday, November 12th. Three of the sites had technical problems during the first test, so minimal analysis was conducted on the first test's measured data. The second test on Wednesday, November 19th, was successful, with all five buildings simultaneously reducing their electric demand (See Figure E-3). The shed strategies consisted of the following type of control changes: zone set-point change, direct control of fans, resetting duct static pressure, resetting of cooling valves, reduction of overhead lighting, and reduction of anti-sweat heaters.

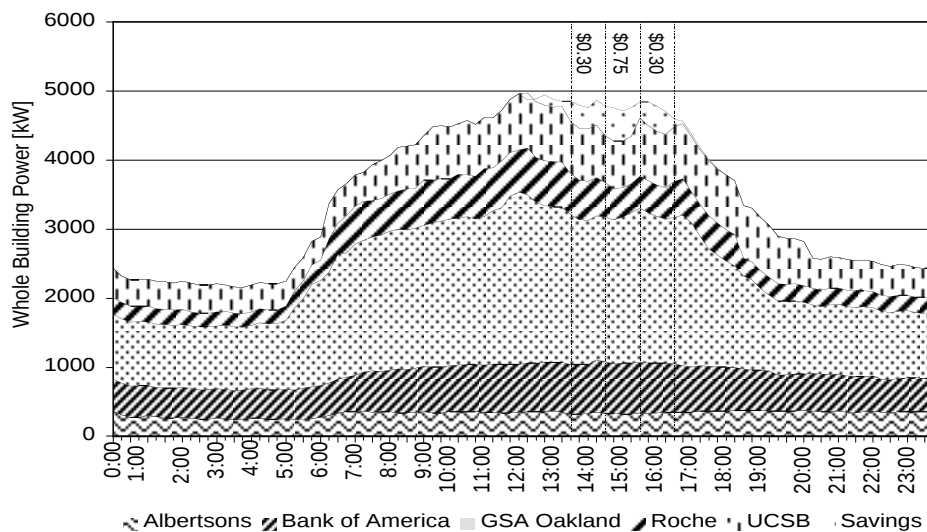


Figure E-3. Auto-DR Electric Load Shed from five sites on Wed. Nov. 19, 2003.

The aggregated total demand for the five facilities was nearly 5000 kW. The maximum peak savings was about 10% of that load, or about 500 kW. The maximum load reduction at each site ranged from 8 kW (Bank of America) to 240 kW (GSA). Area normalized maximum savings ranged from 0.04 W/ft² (Bank of America) to 0.83 W/ft² (Albertsons). Hourly average electric load reductions for each of the five sites are shown

in Figure E-4. The maximum savings occurred during the high-price time for three of the five sites. There were no tenant or other complaints at any of the sites, but this was not surprising given that the sheds were not aggressive.

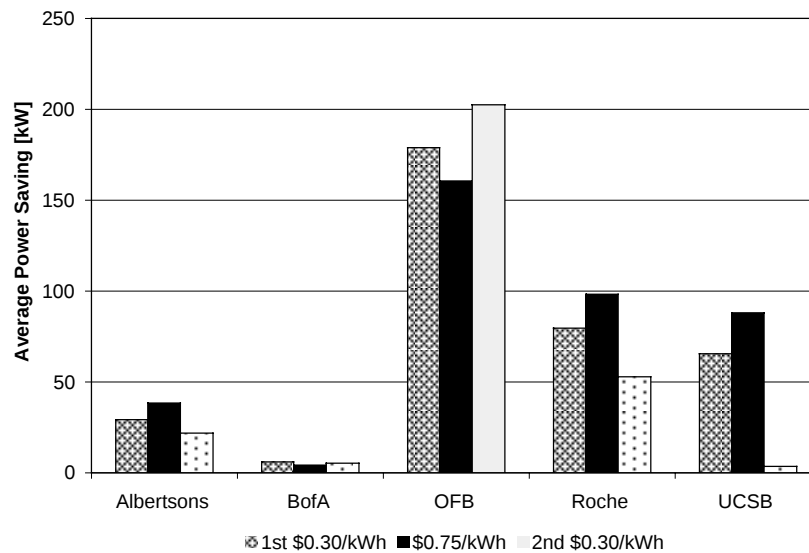


Figure E-4. Auto-DR Electric Load Shed from five sites on Wed. Nov. 19, 2003.

Overall Lessons

This study has demonstrated a number of key issues that relate to Automated DR, and DR in general:

- Fully automated DR is technically feasible with minor enhancements to current state-of-the-art technology** – The facilities that participated in the study used their existing EMCS and EIS systems for the Auto-DR test. In two cases, an electronic interface component was added to provide communications functions necessary for Auto-DR. No additional hardware was required at the other three sites. All five sites required custom software programming to enable Auto-DR functionality. The time required for programming at each site varied from a couple of days to about one month of labor. The technology used offers a glimpse of the issues that may need to be addressed with a large-scale deployment effort. While the Auto-DR infrastructure and associated components performed as intended in this test, additional technical issues associated with a full-scale Auto-DR deployment are expected to be significant (see Section 6 - Future Research Topics).
- New Internet technology enhances the capabilities of existing building systems to enable demand response** – Although each of the participating facilities had different types of EMCS and EIS systems, they were “unified” in the sense that they all monitored and responded to a price signal from one common price server. The custom software at each site was programmed using the

emerging technology standards “XML” and “Web services.” An examination of the use of XML/Web services and the associated interfaces to existing EMCS and EIS systems is included in this report.

- **Automation enhances demand response programs** – The electric consumers we worked with indicated that automation of DR is likely to foster greater participation in various DR markets by decreasing the time needed to prepare for a DR event. Automation may likely increase the number of times a facility may be willing to shed loads, and perhaps improve the depth of the sheds, and the number of facilities involved in DR.
- **Large facilities support the objectives of DR** – This project involved extensive discussions and interactions with five large organizations and institutions. Overall we obtained excellent support and assistance in this research. The energy managers at these organizations believe that DR programs and tariffs will increase in their importance and prominence, and new technology will assist them in participating in these programs.
- **New knowledge is needed to procure and operate technology and strategies for DR** – DR is a complex concept. Facility operators need to understand DR economics, controls, communications, energy measurement techniques, and the relation between changes in operation and electric demand. Such understanding may involve numerous people at large facilities. Current levels of outsourcing of control services complicate understanding of control strategies and system capabilities.

Outstanding issues that the project was not able to address include how large the load shed would be in warmer weather and an evaluation of the implementation costs for the Auto-DR systems in the current and mature technology markets. Future work will consider these and other issues, including how to scale up to the Auto-DR technologies to include larger numbers of buildings in future tests, and which load shedding strategies are optimal for different building types and climates.

1. Introduction

1-1 Background and Report Overview

This report describes the results of a research project to evaluate the technological performance of Automated Demand Response hardware and software systems in large facilities. The systems evaluated in this study were installed following California's electricity crisis, which resulted in rolling blackouts and unprecedented high prices. The basic premise of this research project was to conduct a test using a fictitious electricity price sent over the **Internet** to trigger a demand-response event at the facilities participating in the test. Demand Response can be defined as (1) load response managed by others for reliability purposes, (2) load response managed by others for procurement cost minimization purposes (e.g., load bidding), and (3) price response managed by end-use customers for bill management.¹ The technology evaluated in this report could be used to support any of these three forms of Demand Response.

The two main drivers for widespread demand responsiveness are the prevention of future electricity crises and the reduction of electricity prices. Additional goals for price responsiveness include equity, through cost of service pricing, and customer control of electricity usage and bills. Demand response has been identified as an important element of the State of California's Energy Action Plan, which was developed by the California Energy Commission (CEC), California Public Utilities Commission (CPUC), and Consumer Power and Conservation Financing Authority (CPA). The CEC's 2003 Integrated Energy Policy Report (CEC, 2003) also advocates DR (Docket No. 02-IEP-1).

For the purpose of this project, we use the term Automated Demand Response or Auto-DR to refer to **Fully-Automated Demand Response**. Levels of automation in demand response may be categorized into manual, semi-automated, and fully automated methods. **Manual DR** consists of people initiating changes in electric loads by turning off loads, or switching and changing control settings when they receive communications from an external source (such as a phone call, pager signal, or email). **Semi-Automated DR** consists of a person initiating a pre-programmed load shedding strategy when they receive price signal communications from an external source. **Fully Automated DR** refers to the use of control and communications technology that listens to an external signal, and then initiates a pre-programmed shed strategy without human intervention.

We use the terms load shedding and demand shedding interchangeably. Load shedding consists of reducing or shedding loads as a DR strategy. One examples of load shedding is to change thermostat settings to reduce cooling electricity demand. All of the demand response techniques evaluated in this report were load shedding as opposed to load shifting. Load shifting consists of modifying the timing of a load, such as a production schedule, or thermal storage using active or passive systems that pre-cool building mass, water, or ice.

¹ The CA ISO refers to load response and price response as "dispatched load" and "demand elasticity."

Report Structure. This section (**Section 1**) describes the project goals and objectives, and discusses previous research. **Section 2** describes the project **Methodology**. **Section 3, Systems Characterization, Measurement Systems and Techniques**, provides detailed technical descriptions of the controls and communications systems, DR shedding strategies, and measurement systems used in the evaluation of each site. **Section 4, Results**, reports on the performance of the DR technology and provides extensive discussion of the measurement of the demand-shed savings. **Section 5** provides a **Discussion** of organizational and technological challenges related to DR. **Section 6, Summary and Future Directions** summarizes a number of key findings and describes outstanding issues and research questions. An extensive set of appendices provides additional documentation of the project background, methods and results. **Appendix I** provides a review of acronyms and terminology.²

1-2 Project Goals

This report reviews the results of a Fully Automated Demand Response Test. The primary goal of this research project was to evaluate the technological performance of Automated Demand Response hardware and software systems in commercial buildings. There were a number of secondary goals. These included:

- **Improving the understanding of Automated DR systems by classifying and characterizing various attributes of the systems available today.** We sought to understand the effort required to enable fully automated State-Of-the-Art communication and control technology in large facilities.
- **Evaluating the size of demand shedding capabilities in large facilities.** Large facilities were chosen for several reasons. First, air conditioning in “commercial buildings” is responsible for about 15% of the peak electric demand on peak California days (Kooimey and Brown, 2002). Automating demand response in large facilities could allow Californians large reductions in peak MW load. Second, the California Energy Commission funded several programs to deliver advanced automation for Demand Responsive heating, ventilation and air conditioning (*HVAC*) systems (Nexant, 2002; KEMA-Xenergy, 2002). This research project sought to explore and build on the capabilities and DR features of new technology deployed as a result of that program.
- **Identify technology gaps and prioritize research for future DR systems.** Such research is important in helping to identify the key features of how DR functions in practice at the customer level. Similarly, while technology features need to be carefully characterized and evaluated, we also sought to evaluate the market for DR technology, especially the decision-making perspectives of the facility owners and management.

² The first occurrence of each acronym or terminology is highlighted in bold italics.

- **Develop and test a real-time signal for automated demand response.** To ensure that the response was fully automated, we sought to develop a signal that initiated the DR strategies soon after it was received. Most of today's real-time-pricing" (or RTP) is actually day-ahead pricing that typically consists of a set of 24 hourly prices. We did not want to give the facilities staff time to manually respond in our test. Instead, we used a 15-minute ahead RTP signal, as further described in Section 2.

1-3 Previous Research

The California Energy Commission (CEC) and New York State Energy Research and Development Agency (NYSERDA) have been the leaders in demonstrating demand response programs utilizing enabling technologies. Several studies have investigated the effectiveness of the demand responsive technologies implemented in the California and New York efforts.

Nexant has documented its evaluation of the CEC's Peak Load Reduction Program in California in a series of reports (Nexant 2001 and Nexant 2002). These reports document the performance of all the funded technology projects including the magnitude of the response and the cost associated with it.

During the same period, LBNL and Pacific Northwest National Laboratory (PNNL) studied the effectiveness of enabling technologies on customer performance in price-responsive load programs in California and New York (Goldman et al, 2002). The data for this study came from a survey of 56 customers working with five contractors participating in the CEC and NYSERDA-sponsored DR programs. For New York, these data were combined with actual load curtailment data to quantify effectiveness.

LBNL and PNNL worked with Neenan Associates to evaluate the effectiveness of New York Independent System Operator (NYISO) Demand Response Programs during the summer of 2002. A detailed survey was administered to evaluate the technology used by the program participants. The connection between the actual performance under the NYISO programs and the technologies was characterized (Neenan et al, 2003). As part of this project Kintner-Meyer et al (2003) summarized the methodologies that can be used to evaluate a facility's demand responsive capabilities and response technologies.

At the same time as the Auto-DR research project documented in this report, CEC funded another research project that investigated the customer response to day-ahead wholesale market electricity prices in New York. LBNL and Neenan Associates worked with Niagara Mohawk Power Company to combine measured interval data for large customers with the results of a survey that, among other things, collected data related to the enabling technology endowment of the same customers. The effect of the technology endowment on responsiveness to real time prices and on customer choices regarding supplier, hedging and NYISO program participation was investigated (Goldman et al, 2004).

Previous research at LBNL and elsewhere has examined methods to measure demand-shed savings. The California Independent System Operator's (ISO) 2001 Demand Relief

program used the average power from the 10 previous days as a baseline against which to measure the magnitude of demand shed. This has been a reasonable method for industrial demand shedding, which is dominated by process load changes. This approach does not transfer to the building sector, as it fails to account for the correlation between building electricity use and weather. Demand response days are often warm days, and the baseline load shape for a warm day may be greater than the 10 previous days. LBNL and others have conducted research into evaluation methods. The research project documented in this report included a significant effort related to developing and evaluating new and existing methodologies (See Section 3 and Appendix II for descriptions and further details).

In addition to research concerning utility programs, controls, and communications systems, several research studies have examined various topics concerning DR in commercial buildings such as how to operate buildings to maximize the demand response and minimize the loss of services from DR. Kinney et al reported on weather sensitivity of peak load shedding and power savings from setting up temperatures in buildings to reduce cooling loads (Kinney et al, 2001). Demand limiting and other peak demand control strategies are not new. Previous work from Piette described possibilities for using the control systems to reduce and control peak electrical demands (Piette, 1991). A recently developed guide on Enhanced Automation (KEMA-Xenergy, 2002) was developed for the California Energy Commission to help commercial building owners evaluate control system enhancements and peak reduction strategies .

EIS, EMCS and DR – Change and Overlap

The building controls industry, like other industries, is undergoing a series of dramatic changes, resulting in the development of new features that take advantage of advanced computing and communications systems. Recent research by LBNL and others has evaluated the capabilities, features, and cost-effectiveness of new technologies for building energy efficiency and demand response (Motegi et al, 2003a and 2003b). Energy Information Systems (EIS) have evolved out of the electric utility industry in order to manage time-series electric consumption data. Since EIS products are relatively new technologies, they are changing quickly as the market unfolds. EIS products are being developed to include a wide variety of features and a fair level of complexity to satisfy the wide range of client needs. Other energy management technologies have also expanded their functionalities.

Figure 1-1 shows the overlap and relationships between EIS, energy management and control systems (EMCS) and demand response systems (DRS). The technologies in these domains differ, yet there are a number of overlaps in functionality and purpose. The EMCS provides energy management and control using both Web-based and non-Web-based systems. The demand response field has developed systems that enable utility-operated demand response programs or other demand curtailment measures (e.g., responsive thermostat³, direct load control devices⁴). Such systems may not be connected

³ A thermostat that can receive external signals and respond by adjusting temperature settings.

with the electric meter (like that of an EIS) or a centralized control (like that of a Web-EMCS). This project is concerned with the area of intersection among these domains. This intersection involves remote control of demand response, electric metering, and integrated facility control. The technologies involved in this study have capabilities in each of these three areas, but are all based on different system architectures and linkages with existing legacy control systems.

Types of Web-Based Energy Information Systems (EIS)

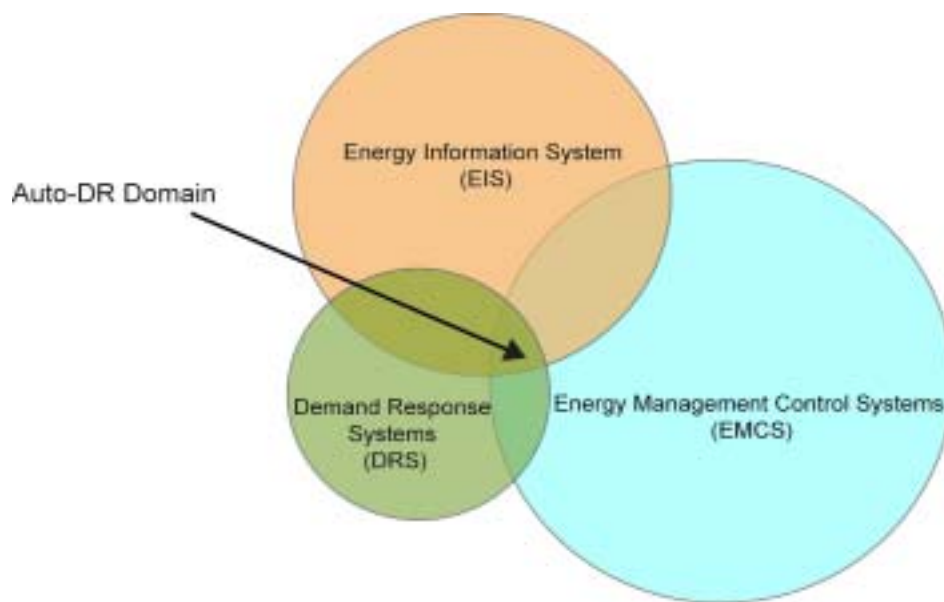


Figure 1-1. Overlap Between Energy Information Systems (EIS), Energy Management Control Systems (EMCS) and Demand Response Systems (DRS)

⁴ Devices that can interrupt power supply to individual appliances or equipment on consumer premises by the utility system operator or ISO.

2. Methodology

This section provides an overview of the project methodology, including:

- Project overview and timeline
- Site selection criteria and sites considered
- Site characteristics and background
- Auto-DR system description
- Controls and communications upgrade description
- Electric price signal and test description
- Assessment of Lead Users of Auto-DR

2-1 Project Overview and Timeline

The Automated DR project took place over approximately two years, beginning with a planning activity in summer 2002. The 11 major milestones are shown in Table 2-1.

Table 2-1. Project Timeline and Milestones

Milestone	Time Period
Project Planning	Summer – Fall, 2002
Interviews with Nexant	January 2003
Owners Information Developed	February 2003
Participant Conference Call	August 2003
Collection of MOUs	September 2003
Site Visits, Monitoring Install Completed	October 2003
Final Trouble shooting	November 12, 2003
Test Period	November 10 – 24, 2003
Final Successful Test	November 19, 2003
Data Analysis	November 2003 – February 2004
Final Report	March 2004

The project was conceptualized by Ron Hofmann, a consultant to the California Energy Commission who expressed an interest in evaluating the automation capabilities of control and communications systems in large facilities. LBNL began planning the project in the early summer of 2002, developing a detailed project description, recruiting a research team, and conducting initial discussions with potential project participants about the feasibility of a fully automated DR test. LBNL met with KEMA-Xenergy in summer 2002 to review the test concept's feasibility as KEMA-Xenergy had recently completed case studies of control systems and DR and two guidebooks on Enhanced Automation (www.consumerenergycenter.org/enhancedautomation).

LBNL met with analysts from Nexant in January 2003 to review Nexant's experience in the evaluation of the sites that participated in AB970 and SB-5X. The meeting included a discussion of various topics, such as which DR participants used the most advanced technologies, what levels of automation existed among the sites, and the current status of the technologies at the sites. Since there were few DR programs in 2002, many of the

systems installed as part of these programs were taken out of service because of the lack of financial incentives to maintain them.

A detailed project description, including details of the proposed Auto-DR test, designed to inform building owners about the project was developed in February 2003 (see Appendix III). This document was used in conversations with building owners, property managers, control system and EIS vendors, and others interested in the Auto-DR test. From April through July, 2003, LBNL conducted extensive discussions with potential project participants concerning their interests and motivation in participating in the Automated DR test. Several site visits were conducted. LBNL also worked with Infotility to define the technology requirements for the test.

A complete set of project information was developed and communicated to the participants in a teleconference that took place in August 2003, as further described in Section 2. Five MOUs (memorandums of understanding) were collected by September 2003. One site that participated in the test did not complete the MOU, but this was not a requirement of the test. Rather, the MOU served as a communication vehicle to define the terms of the test and LBNL's expectations of the participating sites. Final site visits and monitoring plans were completed in October 2004. The monitoring plans reflected LBNL's understanding of the electric demand shedding strategies defined by each site and outlined what measurements were to be taken during the shed to quantify the shed savings.

The test period was delayed until mid November. It would have been more ideal to conduct the test during more typical summer weather, but that was not possible due to the additional time required to fully program and debug the Automated DR software. The final test took place during the November 10th to 24th, 2003 time frame. The initial high price period took place on November 12th, 2003. Several of the sites did not respond as intended on the first test. During the 2nd test on November 19th, 2003, all five sites successfully executed their demand shedding strategies as planned. The test was followed by extensive data collection and analysis activities, as described below. A set of interviews with each of the building owners was conducted to evaluate their experience during the test.

2-2 Selection Criteria and Sites Considered

One objective of this project was to evaluate the technological performance of different controls and communication systems related to participation of demand and end-use systems in dynamic price programs. Thus, we tried to select sites that represented a diverse set of facilities utilizing different technologies, based on the following characteristics:

- Facilities (different types of commercial and light industrial)
- Energy Information Systems (EIS)
- Energy Management Control Systems (EMCS)
- Gateways
- Utilities serving the facilities

- Ownership type (government, private sector, chains, etc.)
- End-Use Load Shedding Strategies

Additionally, we looked for demonstrated DR capability and a willingness to share information on facility operation, facility characteristics and monitored data for the time periods before and during the Auto-DR tests. All of the sites selected had received CEC funds that were available following the electricity crisis to install advanced technologies (See Appendix IV). As part of that program, a CEC evaluation contractor (Nexant 2002) documented that the selected sites demonstrated some capability to shed demand.

Our approach to identifying candidates for the Auto-DR tests was varied. We used several leads, including the list of customers that CEC had funded for DR improvements. In some cases we approached the owners and operators directly—especially in cases where we had worked with them on other research projects (UC Santa Barbara and GSA). In other cases, we approached EIS vendors and identified potential buildings, then approached the owner or operator. As a result of our initial test-site identification effort, we came up with the following list:

- University of California (UC) Santa Barbara and other UCs
- Long Beach State and other California State Universities
- United States Postal Service
- Calif. Dept of General Services
- General Services Administration
- Albertsons
- Roche Pharmaceuticals
- Bank of America
- Shopping Malls (Infotility customers)

2-3 Site Characteristics and Background

Based on our meetings with facility owners and operators, EIS vendors and Nexant we developed a list of six facilities meeting the criteria for the Auto-DR test. Final selection of the following five sites was based on the interest and commitment from discussions with owners and vendors, and included:⁵

- Albertsons, Engage Networks/eLutions (Supermarket)
- Bank Of America, WebGen Intelligent Use of Energy (Office)
- General Services Administration, BACnet Reader and BACnet controller (Office)
- Roche Pharmaceuticals, Tridium Vykon (Office and Cafeteria)
- UC Santa Barbara, Itron enterprise Energy Management Suite (Library)

Prior to the upgrades required for the Auto-DR test, the controls and communications systems used in the participating buildings were substantially similar to other large commercial buildings in California. All of the sites had microprocessor based Energy Management and Control Systems (EMCS) that are typical for large commercial

⁵ USPS – San Jose – CMS Viron/Chevron (Distribution Center) dropped out of consideration when Chevron bought Viron and there were information technology upgrade problems

buildings of this type. A variety of EMCS brands were present. The systems were between five and fifteen years old. Some of the sites had heterogeneous systems of various ages, brands and product lines within a given facility.

However, the facilities selected for the Auto-DR test differed from most commercial buildings in California because each site had the capability to remotely monitor and control HVAC or lighting equipment over the Internet. Although these remote control and monitoring features, known collectively as *telemetry*, are becoming increasingly popular in newly installed EMCSs, they are still uncommon within the installed base of commercial buildings in California. For this reason, the 2003 Auto-DR participating sites were a select group. The demonstrated DR capability of these facilities is summarized in Appendix IV.

In August 2003, a meeting was arranged where all the owners, operators and EIS vendors were invited to participate. The objective of this meeting was to provide the participants with an overview of the project, allow them to hear about related technology at the other sites and answer any of their questions. Following the meeting, an information package was sent to all the participants (Appendix III). This package included: (1) a memorandum of understanding for facility owners to review and sign, (2) a detailed description of the price signal, (3) a questionnaire to collect site specific information relating to the demand response actions that the site could implement, (4) another questionnaire to collect technical information about the communication hardware and capabilities at each site, and (5) a tentative timeline for the different stages of the project. During the following weeks, the project was delayed by the time required to finalize the *XML* signal specifications and associated software requirement. Once the specifications were circulated (in late August, 2003), numerous conversations with control and EIS vendors were needed to identify company individuals qualified to discuss the technology development and authorize the work with us.

Table 2-2 summarizes the characteristics of each site. The sites differ as to which end-uses are included in the whole-building electric meter because three of the sites are part of larger campuses and have central cooling plants. Cooling energy delivered to each building is not measured at two of these. If cooling energy was not discretely measured for a given test building, its effect on energy and demand savings (or loss) was not included in the calculations⁶. The table shows that the November 2003 whole-building power (WBP) peak demand ranged from 401 to 2710 kW, or 2.8 to 8.0 W/ft². The summer peak demand for summer 2003 is also shown (2003 WBP Peak).

Table 2-2. Summary of Sites

	Albertsons	Bank of	GSA	Roche	UCSB
--	-------------------	----------------	------------	--------------	-------------

⁶ Potentially it may also contribute to negative savings, because reduction of airflow requires lower chilled water temperature to maintain same zone temperature.

		America	Oakland		
Location	Oakland	Concord	Oakland	Palo Alto	Santa Barbara
Use	Supermarket	Office (Retail)	Office	Pharmaceutical laboratory (Office/Cafeteria)	Library
Cooling System	Included	Not included	Included	Not included	Included
Area	50,000	211,000	978,000 (Conditioned)	192,000 *	289,000
2003 Annual WBP peak	431 kW	N/A	3795 kW	782 kW	1311 kW
WBP peak (Nov)	401 kW	999 kW	2710 kW	706 kW	866 kW
Peak W/ft ² (Nov)	8.0	4.7	2.8	3.6	3.0

* Includes three buildings - Office Building A2 is 101,078 ft², FS is 23,159 ft², SS is 67,862 ft².

Facility Descriptions

Albertsons



Figure 2-2. Albertsons

- **Facility:** Supermarket
- **Utilities serving the facilities:** PG&E at Oakland Site
- **Ownership type:** Large owner occupied site with numerous locations in California
- **Type of tenants:** Customers

The store opens at 6:00 am and closes at midnight, seven days a week. Some components are shed or turned off during nighttime mode operation from midnight to 6:00 am. There is no difference in the operational patterns between weekdays and the weekend. Due to the refrigeration demand for fresh and frozen foods, Albertsons electric demand per square foot (8.0 kW/ft²) is the highest of all five sites.

Bank of America



Figure 2-3. Bank of America - Concord Data Center, Building B

- **Facility:** Large private sector office building
- **Utilities serving the facilities:** Direct access and PG&E at Concord Site
- **Ownership type:** Large owner occupied site with numerous locations in California
- **Type of tenants:** Company employees

The Bank of America has four buildings (A, B, C and D) at the site. Buildings A, B and C are office buildings. Building D has a large data center. The cooling plant is located at Building D and supplies chilled water to all the buildings. The Auto-DR test was demonstrated at Building B only.

Oakland Federal Building (GSA)



Figure 2-4. GSA Oakland Federal Building

- **Facility:** Large Government Office
- **Utilities serving the facilities:** Direct access and PG&E in Oakland
- **Ownership type:** Large owner occupied federal building
- **Type of tenants:** Governmental employees

The Oakland Federal Building consists of twin towers with a gross floor area of 1.1 million square feet and included 971,000 ft² of office space, a 7,200 ft² computer center, and a 36,000 ft² parking garage. There are four main air systems which include cold deck, hot deck and return fans (eleven main air handlers and 47 smaller supply fans). There are variable frequency drives (VFD) on 22 of these fans. The distribution system includes dual-duct and variable air volume (VAV) with reheat serving the perimeter zones, and single-duct VAV (without reheat) serving the core zones. The building achieved the ENERGY STAR Label for Buildings in 2000 without major retrofits or additional commissioning (Piette, et.al. 2002).

Roche Pharmaceuticals



Figure 2-5. Roche Palo Alto – Building FS (left) and A2 (right)

- **Facility:** Private research campus
- **Utilities serving the facilities:** City of Palo Alto Utilities
- **Ownership type:** Large owner occupied research facility
- **Type of tenants:** Laboratory staff

Roche Palo Alto, situated in the Stanford Research Park, is one of the company's four pharmaceutical research centers in Silicon Valley. The campus consists of seventeen buildings with a total area of 760,000 square feet. These buildings are administrative buildings and pharmaceutical laboratories. The peak load for the campus is 15MW.

University of California, Santa Barbara



Figure 2-6. UCSB – Davidson Library

- **Facility:** Campus, although the tests will be in the main library
- **Utilities serving the facilities:** Direct access (APS) and PG&E in Santa Barbara
- **Ownership type:** Large owner occupied campus
- **Type of tenants:** Students, library staff

University of California, Santa Barbara (UCSB) has a large campus with 4.5 million square feet of building area, holding approximately 22,000 students, faculty, and staff. UCSB campus has a “virtual central plant”.⁷ The main library (Davidson Library) was chosen for the Auto-DR test. The library consists of three adjacent buildings, II, III, and IV. The library is connected to the virtual central plant. The library was chosen because it houses a large amount of books, which has a substantial thermal mass effect.

Considering the thermal mass effect, the interior temperature change is slow, and it is easier to maintain the occupants’ comfort during the tests. Another reason is because the library is a non-critical space where complaints would be minimal. The library is open from 8:00 am to midnight, from Monday to Thursday. The HVAC equipment starts operation at 6:00 am and stops at 8:00 pm. The library closes earlier at 9:00 pm on Friday, and the equipment stops at 5:00 pm. The library is open on the weekend, but for less hours than seen in the Monday through Thursday schedule. The weekend electrical demand is lower than during the week. Independent of our Auto-DR tests, the energy manager of UCSB occasionally sheds the electric demand to test his energy saving strategies.


⁷ The chilled water loop that runs through the campus links multiple buildings and allows any single chiller to supply to all the buildings when the demand is low. Most of the medium-large sized campus buildings are connected to the chilled water loop.

2-4 Automated Demand Response System Description

This section describes the various system components that were used to implement the 2003 Auto-DR test.

System Functionality

The Automated Demand Response System generated an XML price signal from a single source on the Internet. Each of five disparate commercial building sites monitored the common price signal and automatically shed site-specific electric loads when the price increased beyond pre-determined thresholds. Other than price signal scheduling, which was set up in advance by the project researchers, the system was designed to operate without human intervention during the two-week test period. Figure 2-6 shows the overall sequence of the Auto-DR network communications.

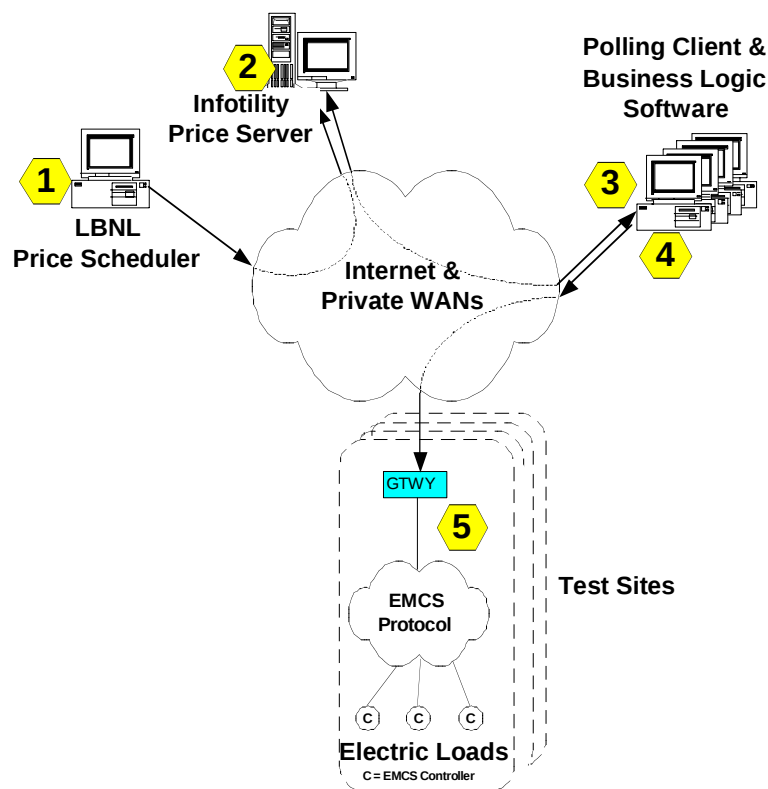

1. LBNL defined the price vs. time schedule and sent it to the price server.
2. The current price was published on the server.
3. Clients requested the latest price from the server every few minutes.
4. Business logic determined actions based on price.
5. EMCS (energy management control system) carried out shed commands based on business logic.

Figure 2-7. Auto-DR Network Communications Sequence

System Geography

Although all of the test sites were in California, the Auto-DR infrastructure, ***polling client*** software and software developers were distributed throughout North America (Figure 2-7). Existing networks, including the Internet and private ***WANs*** were used for these long-distance communications at no additional cost to the participants.

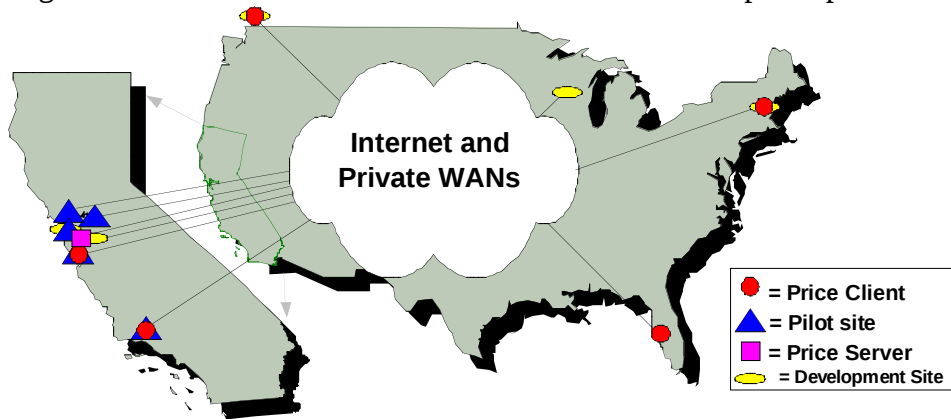


Figure 2-8. Geographical Location of Auto-DR Infrastructure

Web Services / XML

The infrastructure of the Auto-DR System is based on a set of technologies known as Web services. Web services have emerged as an important new type of application used in creating distributed computing solutions across the Internet. Properly designed Web services are completely independent of computer platform (i.e., Microsoft, Linux, Unix, Mac, etc.). The following analogy helps to describe Web services: Web pages are for people to view information on the Internet; Web services are for computers to share information on the Internet. Since these interactions often occur without human intervention, this technology is sometimes referred to as “***Machine-to-Machine***” or “***M2M***”. M2M is a superset of technologies that includes some XML/Web services based systems.

XML is a “meta-language” - a language for describing other languages - that allows design of customized markup languages for different types of documents on the Web (Flynn, 2003). It allows designers to create their own customized tags, enabling the definition, transmission, validation, and interpretation of data between applications and between organizations (Webopedia, 2004). Standard communication protocols used on the Internet and ***LAN/WANs*** (local area network/wide area network) including ***TCP/IP***, ***HTTP*** and ***SOAP*** are used to transfer XML messages across the network.

Price Scheduling Software

A client software application was used by researchers at LBNL to set-up the price vs. time profile in the ***price server***. The signal was designed so that the price was published 15 minutes ahead of when it was to take effect. The purpose of the 15-minute advanced notice was to give operators enough time to manually “opt out” of the shed if they desired. In the November tests, none of the operators opted out of the sheds.

The price profile could be set up hours, days or weeks in advance by researchers, however the building operators were not given advanced knowledge of upcoming fictitious price increases (other than the 15 minute ahead price signal). More details about the price signal are provided in Section 2-6, Electric Price Signal and Test Description.

Web Services – Server

At the heart of the Auto-DR System is the **Web services server**. The server publishes the current fictitious price for electricity in \$/kWh. The server was hosted at a **co-location** site in Fremont, CA. Co-location companies (**co-lo**) provide computer-hosting services for systems that require “**high availability**”. The co-lo site has high **bandwidth** Internet access, **UPS** with backup generators, **load balancing**, guarded access control and other features necessary to prevent unscheduled system shutdowns.

Web Services – Client and Business Logic Software

The polling client is the software application that **polls** (i.e., checks) the Web services server to get the latest price from the aforementioned Web services server. This is known as “**pull architecture**” because the clients pull information from the server. The polling client software resides on a computer managed by the building operators or their representatives for each site. The client software may reside either on a computer at the building site or remotely. In this test, each client polled the server at a user-defined frequency of once every 1 to 5 minutes. All client interactions with the server were **time stamped** and logged. All of the clients and the server used Internet based time servers that provide end-to-end accuracy within plus or minus one second.

Real-Time Shedding

The polling clients for each site received the latest upcoming pricing from the server about 14 minutes before the new pricing actually took effect (15 minute ahead pricing minus the polling delay). Rather than waiting until the new price took effect, **business logic** at all of the test sites shed electric loads immediately upon receipt of an upcoming rise in price. In other words, each site initiated shedding of electric loads about 14 minutes before the price went up. This near real-time shed of electric loads is advisable as prices are rising so as to allow HVAC equipment to ramp down gradually before the new pricing becomes effective. However, this quick and simple approach could be economically detrimental if HVAC and lighting systems start back up 14 minutes too soon, while electric prices are still high. From the small sample of buildings in this test, it appears that the simplicity of real-time load shedding outweighs the benefits of 15 minute delayed action.

Polling Client Price Verification

The price server included a feature that verified that the clients each received correct pricing information. This feature was implemented by requiring that each client’s request for the latest price included its current price and associated time stamp. All pricing data were stored in a database for future analysis.

Although the original intent of this feature was to verify client receipt of server generated pricing, there was another unforeseen benefit as well. When preliminary testing began,

researchers were able to observe when each site came online by viewing its polling history. Even after all the sites were online, this feature was used as an indicator of system-wide communication status. There were cases where clients would stop polling for known or unknown reasons. Because of the communication status indicator, program managers and system administrators were able to quickly observe these intermittent losses of communication and make phone calls to resolve the problems.

2-5 Controls and Communications Upgrades

In order to add Auto-DR functionality to each test site, some upgrades and modification to the controls and communications systems were required. The upgrades were built to work in conjunction with the existing EMCS and EIS remote monitoring and control infrastructure in place at each site.

Custom Software - Price Polling Client

Web services price polling client software was created and installed for each site. Although an example template was provided, it was necessary to customize the client software for use within the software development environment and Information Technology (*IT*) infrastructure at each organization.

Business Logic

The purpose of the Business Logic Software is to determine what actions, if any, should be automatically initiated based on a given electricity price. The business logic can be customized for each site as required. In most cases, the business logic used at the test sites switched between three modes of operation (normal, shed level 1 and shed level 2) as prices changed between \$0.10/kWh, \$0.30/kWh and \$0.75/kWh respectively. Albertsons added additional business logic that forced the systems back into normal mode after 3:30 pm, regardless of price. In the November tests, the business logic software was typically installed on the same computers as the price-polling clients.

Site Specific EMCS modifications

The EMCSs at each site were used to control electric loads such as HVAC equipment and lighting. Various methods were used to communicate the business logic mode commands to the EMCSs. The most integrated systems (B of A, Roche) were able to send and receive control commands directly to EMCS controllers using communication **gateways** to translate between **enterprise** networks (i.e., TCP/IP) and **control networks** (e.g., *BACnet*, *LonTalk*).

The other sites used relay contacts to connect the data networks and control networks. In this method, a special **IP relay** device is controlled remotely over the enterprise network. The onsite EMCS monitors the remotely controlled IP relay contacts and sheds HVAC or lighting loads according to predetermined logic. Physical installation of hardware and wiring was required at sites where IP relay devices were used (Albertsons, GSA and UCSB). It was necessary to install 150 feet of low voltage wiring between the existing IP relay and the EMCS controller at the Albertsons site.

2-6 Electric Price Signal and Test Description

The different programs and tariffs for DR use different types of signals to motivate response. Day-ahead real-time-price tariffs, for example, use a 24-hour price matrix for the following day that is communicated to the customer by the late afternoon. In an hour-ahead real time price tariffs program, customers could be notified of upcoming changes in prices one hour ahead of time. In other emergency- or reliability-based programs, curtailment signals may be sent out by multiple modes such as pager, phone, or fax. These curtailment signals are usually not price signals, but binary signals that indicate when it is time to curtail. The lead time for such signals may vary from 2 hours to minutes depending on the type of the program. The test signal schema for the 2003 test was designed to allow customization so as to accommodate a wide range of tariff and program types.

As mentioned above, the polling clients published the price signal used in the 2003 test on a Web services interface and was available for viewing at any time. The published price changed periodically based on the aforementioned price scheduling software. The shape of the price vs. time profile was designed by LBNL researchers based on the following reasoning. The signal profile needed to meet our research requirements (e.g., price spikes were programmed to occur during the hottest time in the afternoon) and also minimize potential negative effects to the building operators. The signal was designed to provide some predictability to the operators in terms of the frequency of the changes, the level of the prices and the duration of the changes.

In order to meet these criteria the shape of a signal was designed to conform to the following rules. These rules were shared with the building operators in advance of the tests.

- When the price level changed, the level stayed the same for at least one full hour.
- There were three levels of price: normal (\$0.10/kWh), medium (\$0.30/kWh) and high (\$0.75/kWh).
- The duration of price changes to higher than normal would not exceed 3 hours (thus shorter than critical peak pricing (CPP)) and prices would move above normal only once during one day (once prices moved, the facility could be sure that it would be back to normal within 3 hours and would not move again for the day).
- Changes to the price signal were confined to a specific time window: 12:00 pm to 7:00 pm (weekdays).
- The tests for all sites would take place within a two-week period. A maximum of two tests would occur during this time. All five sites were tested simultaneously.

The actual signal sent on November 12th, 2003 is presented in Figure 2-8. This figure was downloaded from the user interface of the price scheduling application. The intention of the first test was to keep the signal as simple as possible but still test two levels of response.

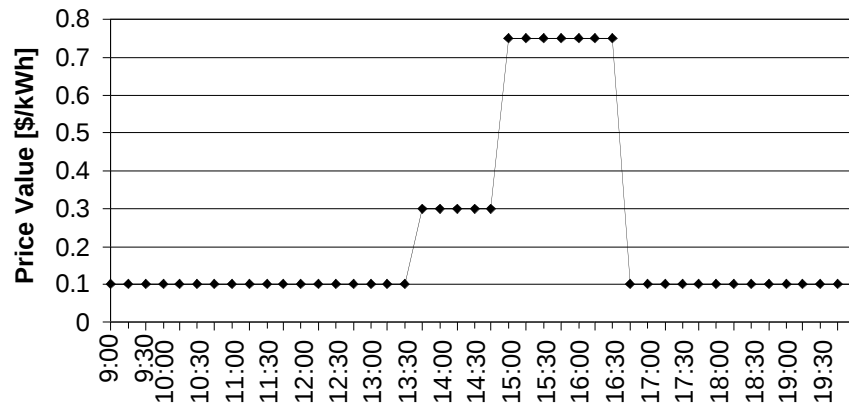


Figure 2-9. Test 1 Price Signal (November 12th, 2003)

The price signal during the second test (November 19th, 2003) was more complex. As shown in Figure 2-10, the signal was programmed to change from normal pricing to medium, then to high, then back to medium, and finally back to normal. The purpose of this pattern was to identify problems that might occur when the systems came out of a curtailment event.

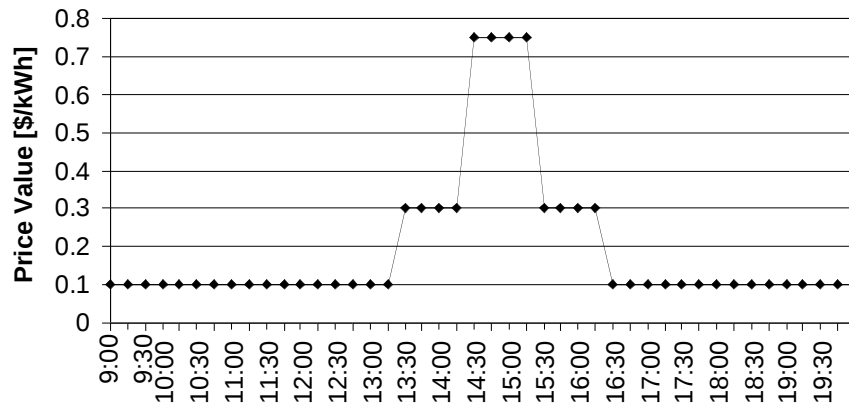


Figure 2-10. Test 2 Price Signal (November 19th, 2003)

2-7 Assessment of Lead Users of Auto-DR

While the primary objective of this study was the development and evaluation of controls and communications systems for Auto-DR, we were also interested in learning about the decision-making processes and perspectives of the organizations and institutions recruited to participate. One important function of technology research is to accurately understand user needs for potential new technologies. As previous studies have stated, such understanding is clearly an essential input to the new technology development (Urban and Von Hippel, 1988). Technology users have a great deal to contribute and can assist in characterizing technology needs and the feasibility of new technologies. Section

5 of this report discusses the lessons learned from using the Lead user concept in evaluating the needs and methods to promote DR in large facilities.

Lead users have been identified as an extremely valuable cluster of customers and potential customers who can contribute to the identification of future opportunities and evaluation of emerging concepts. Lead users are defined as organizations that exhibit the following two characteristics:

- They face the general marketplace needs months or years before the bulk of the marketplace encounters them.
- They are positioned to significantly benefit from obtaining solutions to those needs.

The managers of these types of programs realize that the solutions to energy problems are beyond the ability of one company or facility to solve. They are willing participants in this research project primarily because they understand the problems that could occur if facilities need to be shut down in an energy emergency. It was early in the development of an Auto-DR program for their facilities, but managers were willing to undergo extensive interviews and work together cooperatively with the research team to conduct the Auto-DR test and take part in the Lead Users evaluation.

The Lead User evaluation included a series of interviews with each of the key facility managers and owners. These interviews took place during the recruitment process. The Auto-DR organizational study methodology was primarily telephone interviews of the participants at the facility and the vendors who serve the facilities. The participants are located at some distance from each other and much of the work they do with the sites is via telephone and email. Shockman et al (2004) describe the results of the organizational investigation.

3. Auto-DR Systems Characterization and Measurement

In the Auto-DR test, each of the five participating sites used different approaches in the design and implementation of their systems. This section examines the general characteristics of these systems. Where possible, metrics are used to quantify various attributes and characteristics of the Auto-DR systems. Quantifiable Auto-DR metrics are shown in tables following each section.

3-1 Auto-DR System Architecture

An Overview

Some Auto-DR facilities hosted the polling client software on-site and others hosted it at remote co-location sites (see Table 3-1). The geographic location of the computer that hosts the polling client is less important than the type of environment where it is hosted. Professional co-location hosting services, or “co-los” offer highly secure environments for hosting computers and servers. Co-los generally provide battery and generator backed electrical systems, controlled temperature and humidity, seismic upgrades and 24/7 guarded access control. For companies that don’t have similarly equipped data centers, co-los fill an important need. For computer applications where high availability is important, co-location facilities are often used.

Systems with a high level of integration between enterprise networks and EMCS networks tend to allow direct access to any or all control points in the EMCS without excessively labor intensive **point mapping** required. Direct remote control of EMCS points from enterprise networks means that the business logic computer has the ability to send commands over the network(s) that extend all the way to the EMCS **I/O controller** connected to the equipment that is shed. In a highly integrated system, the EMCS becomes an extension of the enterprise. In these types of integrated systems, a gateway device is used to translate between the different protocols used in enterprise networks and EMCS networks.

Alternately, some systems used relay contacts to interface between enterprise networks and EMCS networks. Relay contacts are commonly used in EMCS programming to define mode changes (e.g., smoke detector contacts). However, the use of relay contacts as an interface between networks is not very flexible. Modifications to shed strategies or other types of remote control would be more difficult with a relay interface system than with an integrated system with a translating gateway. Both gateway based and relay based interfaces to EMCSs can be effective for initiating shed strategies.

Table 3-3. Characteristics of Auto-DR Systems - Architecture

	Albertsons	B of A	GSA	Roche	UCSB
Client hosted at co-lo	Yes	Yes	No	No	No
Remote polling client	Yes	Yes	Yes	No	No
Remote control via Internet Gateway	No	Yes	No	Yes	No

Gateway Type

Gateways used in building telemetry systems provide several functions. First, they connect two otherwise incompatible networks (i.e., networks with different protocols) and allow communications between them (see Figure 3-1). Second, they provide **translation** and usually **abstraction** of messages passed between two networks. Third, they often provide other features such as **data logging**, and control and monitoring of I/O points.

Of the five Auto-DR sites, two used embedded two-way communicating gateways to connect each site's EMCS networks to its enterprise networks (Table 3-2). **Embedded devices** are generally preferred over PC based gateway solutions for scalable, ongoing system deployments. Embedded devices have the following advantages:

- More physically robust. There are no hard drives or other moving parts.
- Less susceptible to viruses and other types of hacker attacks due to custom designed operating systems and applications.
- Less susceptible to human error. Once they are set up to function, there is no reason for site personnel to interact with the device. Since they are not "general purpose" computers, there is no risk of memory overloads due to computer games, screen savers and other applications that may be inadvertently loaded onto them.
- Better form factor. Embedded devices are usually smaller than PCs and are designed to be mounted in secure server rooms with other IT equipment.
- Lower cost. Although volume dependent, application specific embedded devices can be produced in volume for lower cost than PCs.

At Albertsons, an embedded **IP I/O device** (Engage EPIM™) was used for power monitoring and shed mode control. The EPIM provided power monitoring by directly counting **pulses** from power meters. The EPIM set various shed modes into operation by opening and closing **onboard** relay contacts. Although the EPIM IP I/O device effectively provides the interface between the EMCS and enterprise networks, it does not fit the most basic definition of a gateway. It does not connect the protocols of the two networks.

At UCSB, gateway functionality for monitoring was provided by software running on a PC. A previous version of gateway software also provided remote control functionality, but this feature was unavailable at the time of the Auto-DR test due to incompatibility issues that occurred after a software upgrade. To meet the remote control requirements

of the Auto-DR test, an embedded IP I/O device was added. This device had onboard relay contacts similar to the EPIM, but direct measurement of I/O points (such as power meters) was not required.

Table 3-4. Characteristics of Auto-DR Systems - Gateways

	Gateway type	Interface Device Description for Remote Shed Control	Remote Monitoring Description
Albertsons	Embedded IP I/O device	IP Relay (2 contacts)	Meter pulses are monitored through gateway
B of A	Embedded Gateway	Control of EMCS via Internet gateway	Monitoring of EMCS through gateway
GSA	Embedded IP I/O device	IP Relay (2 contacts)	None
Roche	Embedded Gateway	Control of EMCS via Internet gateway	Monitoring of EMCS through gateway
UCSB	PC based Gateway for monitoring, Embedded IP relay for control	IP Relay (3 contacts)	Selected EMCS points monitored through gateway

Figure 3-1, “Network architecture overview of five combined Auto-DR sites” shows the common source of electricity price and the communications protocol translations between the business logic and the final control element (relays, valves etc.) controllers that actually shed the electric loads. Gateways or other devices are used to transfer necessary communications between dissimilar network protocols.

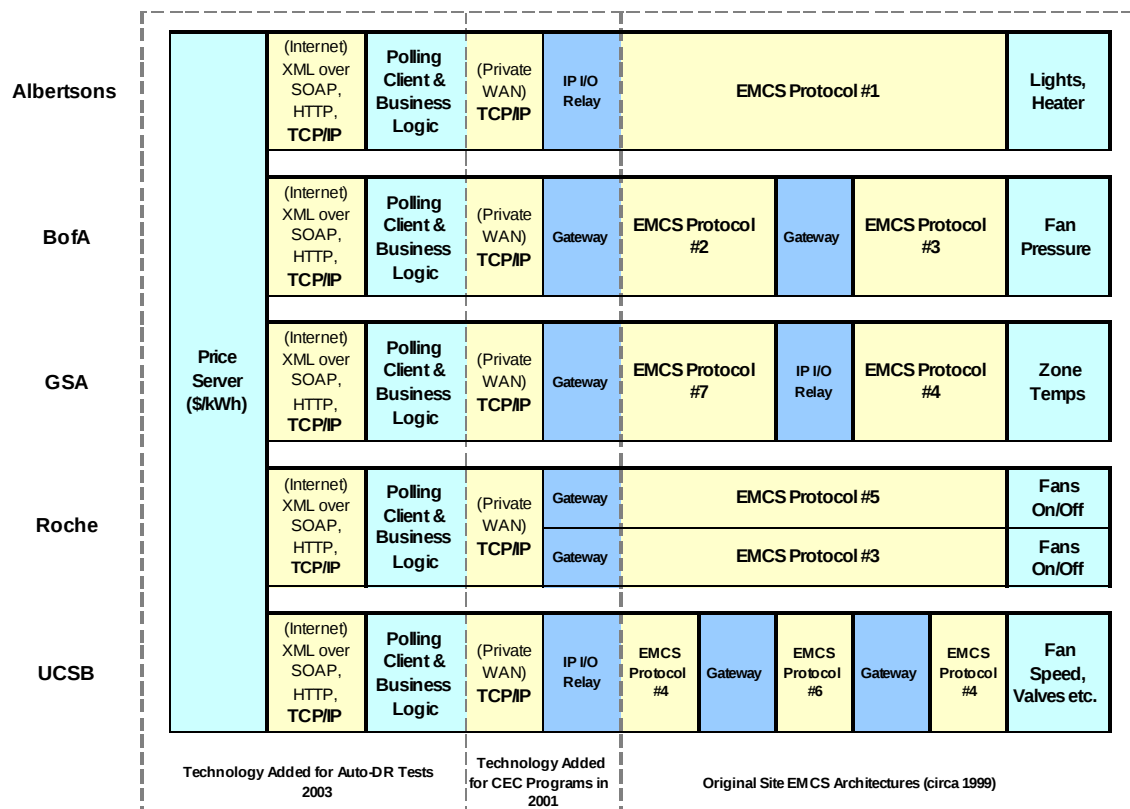


Figure 3-11. Network architecture overview of five combined Auto-DR sites

Integration

For purposes of this study, integration between EMCS and EIS can be characterized by asking two key questions. First, can data from the EMCS and EIS be viewed and analyzed from one **Human Machine Interface (HMI)**? Second, do the EMCS devices such as energy meters reside on the same network as the EMCS devices? Table 3-3 summarizes the answers to these questions for each of the sites. Albertsons, B of A, and GSA either don't have EIS or else they are not integrated with the EMCSs at those sites. At Roche, the Tridium system integrates most of the EMCS points and a small percentage of the electric meters into a comprehensive HMI for viewing, archiving and analysis. UCSB has extensive monitoring of most of the electric meters and sub-meters throughout the campus. Data from these meters are available for visualization, archiving and analysis through the SiE (Itron / Silicon Energy) server along with relevant EMCS points that have been mapped over to it. Electric meters do not reside on the same network as the EMCS devices at either the Roche or UCSB sites.

One distinguishing characteristic of the Auto-DR sites was whether or not they leveraged the existing corporate or campus enterprise network to transmit EMCS and/or EIS data. Use of the existing enterprise network for this purpose has many advantages. System installation costs can be much lower if existing enterprise networks are used for communications instead of installing new, separate networks solely for EMCSs and EISs.

In addition, the Information Technology department that manages the enterprise is often better equipped to assure network reliability and security than the facilities group that traditionally maintains the EMCS and EIS.

Each facility has different functional requirements and organizational structures that dictate how the enterprise, EMCS and EIS networks are designed, installed and maintained. Of the five sites in the Auto-DR test, three of them shared mission critical enterprise networks with EMCS/EIS/Auto-DR systems. Although bandwidth requirements for EMCS/EIS/Auto-DR systems are not great, other organizational impediments prevent the sharing of enterprise networks for non-standard purposes.

At GSA, a completely separate enterprise network was created for the GEMnet EMCS/EIS/Auto-DR system. This was the logical choice for this facility because it was not practical to share the existing enterprise networks with other tenants at the site: the Government Services Administration (GSA) and the Federal Bureau of Investigation (FBI). In such circumstances, it is easier to create a new enterprise network for local and remote access to EMCS and EIS data than it is to resolve complex security and maintenance issues associated sharing an enterprise network with another department or organization.

Table 3-5. Characteristics of Auto-DR Systems - Integration

	Albertsons	B of A	GSA	Roche	UCSB
Integrated EMCS & EIS	No	No	No	Partial	Partial
Primary enterprise network shared with EMCS/EIS/Auto-DR systems	Yes	Yes	No	Yes	Partial

Shed Control Characteristics

Each Auto-DR site used different shed strategies. The control characteristics of these strategies also varied substantially. This section describes the characteristics of each shed strategy (Table 3-4). The number of shed control points is one characteristic of a given Auto-DR implementation. It represents the quantity of points that were adjusted or altered to invoke the shed strategy at each site. Shed control points include hardware control points (for example, valve position) and software points (for example, **setpoints**) that were altered during the shed. Software points other than setpoints were not included. Control granularity and closed loop shed control are both factors that influence the likelihood and degree to which some occupants may be negatively affected by the shed strategy.

Albertsons had only two control points (overhead lights & anti-sweat heaters). Because the size of the store is comparatively small, this was rated as “medium” control granularity. Switching off half of the overhead lights is an *open loop* type of control (i.e., there is no feedback to the system). The anti-sweat heater remained in closed loop control during the shed by operating with a reduced setpoint.

B of A had just one control point (duct static pressure) for the entire 211,000 ft² building, hence the “coarse” control granularity rating. The shed strategy of resetting the duct static pressure so as to maintain zone temperature is a type of closed loop control, but the dearth of temperature **sensors** in the zones reduced the closed loop rating to “partial”.

In stark contrast to the rest of the sites, the GSA building used a fine granularity, closed-loop shed control strategy. The zone temperature setpoints for each of 1,050 VAV terminal boxes (1,400 including reheat side of dual duct boxes) were “relaxed” during the shed. In other words, the cooling setpoints were raised and the heating setpoints were lowered. This approach had an energy saving effect on the central HVAC systems while assuring a known level of service modification to the occupants.

The Roche site used a coarse open loop shed strategy of shutting off fans during the shed.

UCSB used a variety of shed strategies of medium granularity. The shed strategies (including closing cooling valves, and reducing duct static pressure) were all open loop. The outside air dampers were opened to 100%, a strategy that could backfire in extremely hot conditions. The temperate climate in Santa Barbara made this scenario unlikely.

Table 3-6. Characteristics of Auto-DR Systems - Shed Control

	Albertsons	B of A	GSA	Roche	UCSB
Number of Shed Control Points	2	1	~ 1,400	7	42
Shed Control Points per 10,000 ft.²	0.4	0.05	14	0.4	1.4
Control Granularity	Medium	Coarse	Very Fine	Medium	Fine
Closed loop shed Control	Partial	Partial	Yes	No	No

Open Standards

In the EMCS and EIS fields, protocols refer to the low-level communication languages that devices use to “talk” to one another on the network. Of course, one device can only talk to another if they are speaking the same language. Traditionally, each control system manufacturer built controllers and other devices that only spoke their own unpublished **proprietary protocol** (Table 3-5). Once a system is built using a proprietary protocol, the original manufacturer or their representatives are the only parties that can make substantial additions or changes to the system. Some control companies use proprietary protocols as a “lock” on their customers’ systems so as to ensure future business and high profit margins.

Over the past fifteen years or so, there has been a movement toward “open” protocols in the EMCS and EIS industries. **Open protocols** are based on published standards open to the public. Interested companies can build products that communicate using open standards. In a truly open, interoperable system, products from a variety of open product vendors could be added at any time by skilled installers from independent companies. Several sites in the Auto-DR test use open EMCS and/or EIS products that include the BACnet, LonTalk (EIA-709) and **Modbus** open protocols.

Even with considerable interest from building owners few, if any, new or existing building EMCS or EIS systems are truly open and interoperable. Even when open protocols are used, they are often installed as part of a system that requires use of proprietary software or components at the higher levels of the system architecture. Another way “openness” is reduced is by designing products and systems that require proprietary software tools for installation.

In the IT marketplace, open protocols (e.g., TCP/IP), open database interface standards (e.g., **ODBC**) and open hardware standards (e.g., **SIMM**) have helped the industry thrive. This has allowed products from a wide variety of vendors to communicate with one another on internal LANs, WANs and the Internet. A service industry of independent **Systems Integrators** has grown to fill the need of integrating multiple vendor networks into cohesive systems.

Another important trend in the IT industry is the use of a new set of open standards, protocols and languages collectively known as XML/ Web services. The use of XML/Web services in the building controls industry is increasing. This trend will tend to

increase the ability to easily distribute, share and use data from disparate EMCS, EIS and other business systems. This will create opportunities for new products and services that will improve comfort and efficiency in buildings.

In the Auto-DR test, the use of XML/Web services over the Internet provided an overarching open-standards platform by which all of the proprietary and partially open EMCS and EIS systems could communicate. Although the number of commands transmitted between the systems in the 2003 test was minimal (e.g., price, shed mode, etc.), the implications of XML based “add-on” interoperability are very powerful.

Table 3-7. Characteristics of Auto-DR Systems - Open Standards

	Albertsons	B of A	GSA	Roche	UCSB
Open Protocol EMCS	No	Yes	No	Partial	No
Open Protocol EIS	Yes	Partial	NA	Partial	No
Open Protocol Auto-DR	Yes	Yes	Yes	Yes	Yes
Open Standards Auto-DR	No	No	No	No	No
Data Archiving in Open Database	NA	NA	Yes	NA	NA

NA = Not Available

Site Characteristics

Albertsons

Albertson’s system architecture is shown in Figure 3.2.

EMCS

Albertsons uses a proprietary protocol EMCS, Com-Trol, for control of the HVAC, lighting, refrigeration and freezer door anti-sweat heaters. Access to EMCS control and monitoring is available locally on the Human Machine Interface (HMI) or remotely through a dial-up *modem*.

Enterprise Network

Alberston’s corporate WAN and the Internet are used to transmit energy data and Auto-DR commands. Remote telemetry to electric data is provided via an IP I/O Device (Engage EPIM™). This device is capable of measuring electric data and remote monitoring over the enterprise network. In addition, the IP I/O device has *digital outputs* that can be controlled remotely over the enterprise network. A Web server that displays achieved data is hosted by eLutions at a co-location site in Tampa Bay, Florida.

EIS and Measurement

The EIS is from Engage/eLutions. Monitoring of electricity consumption is accomplished through pulse inputs from power meters. The pulses are converted to kW

demand in the IP I/O device and accessed remotely through the eLutions Web based monitoring system. The Engage/eLutions EIS provides the following features:

- Monitoring: whole building and panel sub-metering.
- Visualization: Graphical charts including time-series, daily/monthly consumption summary, calendar profile, 3D profile, and duration curves.
- Data Archive: minute interval electric data are downloadable via the website.
- Other: The energy manager can select multiple Albertson sites and compare/rank their energy usages, though only one Albertsons site is featured in this test.

Auto-DR System Description

The computer containing the Auto-DR polling client and business logic is hosted at Elusion's co-lo in Florida. The business logic determines the correct operational mode for the Oakland store at any given time (normal, shed level 1, shed level 2) based on price and other operational criteria. It commands the IP I/O device relays to open or close using a predetermined code that represents each operational mode. These relay contacts are monitored by the Com-Trol EMCS. Upon sensing the state of the relay contacts, the EMCS commands the overhead store lights and anti-sweat heaters according to the shed strategy. The following business logic was essential at this site. As the store manager's preferred to return the store to normal operation by the evening shopping rush, all store systems are forced to "normal" operation between 3:30 pm and 10:00 pm, regardless of the current price of electricity.

Shed Strategy

In normal mode, the overhead lights are all on (100%) during occupied hours. The freezer door anti-sweat heaters are controlled so as to prevent the glass doors from fogging when opened. The anti-sweat heaters control system uses a pulse width modulation (PWM) scheme that controls the amount of heat supplied to the glass based on the measured **dewpoint** temperature in the store. At night the dewpoint temperature setpoint is changed so as to use less energy. Upon a rise in price to \$0.30/kWh, overhead lighting was reduced by 50% by switching off half of the fluorescent tubes in each fixture. Upon a rise in price to \$0.75/kWh, the anti-sweat freezer door heater control switched to "night mode" which uses significantly less energy.

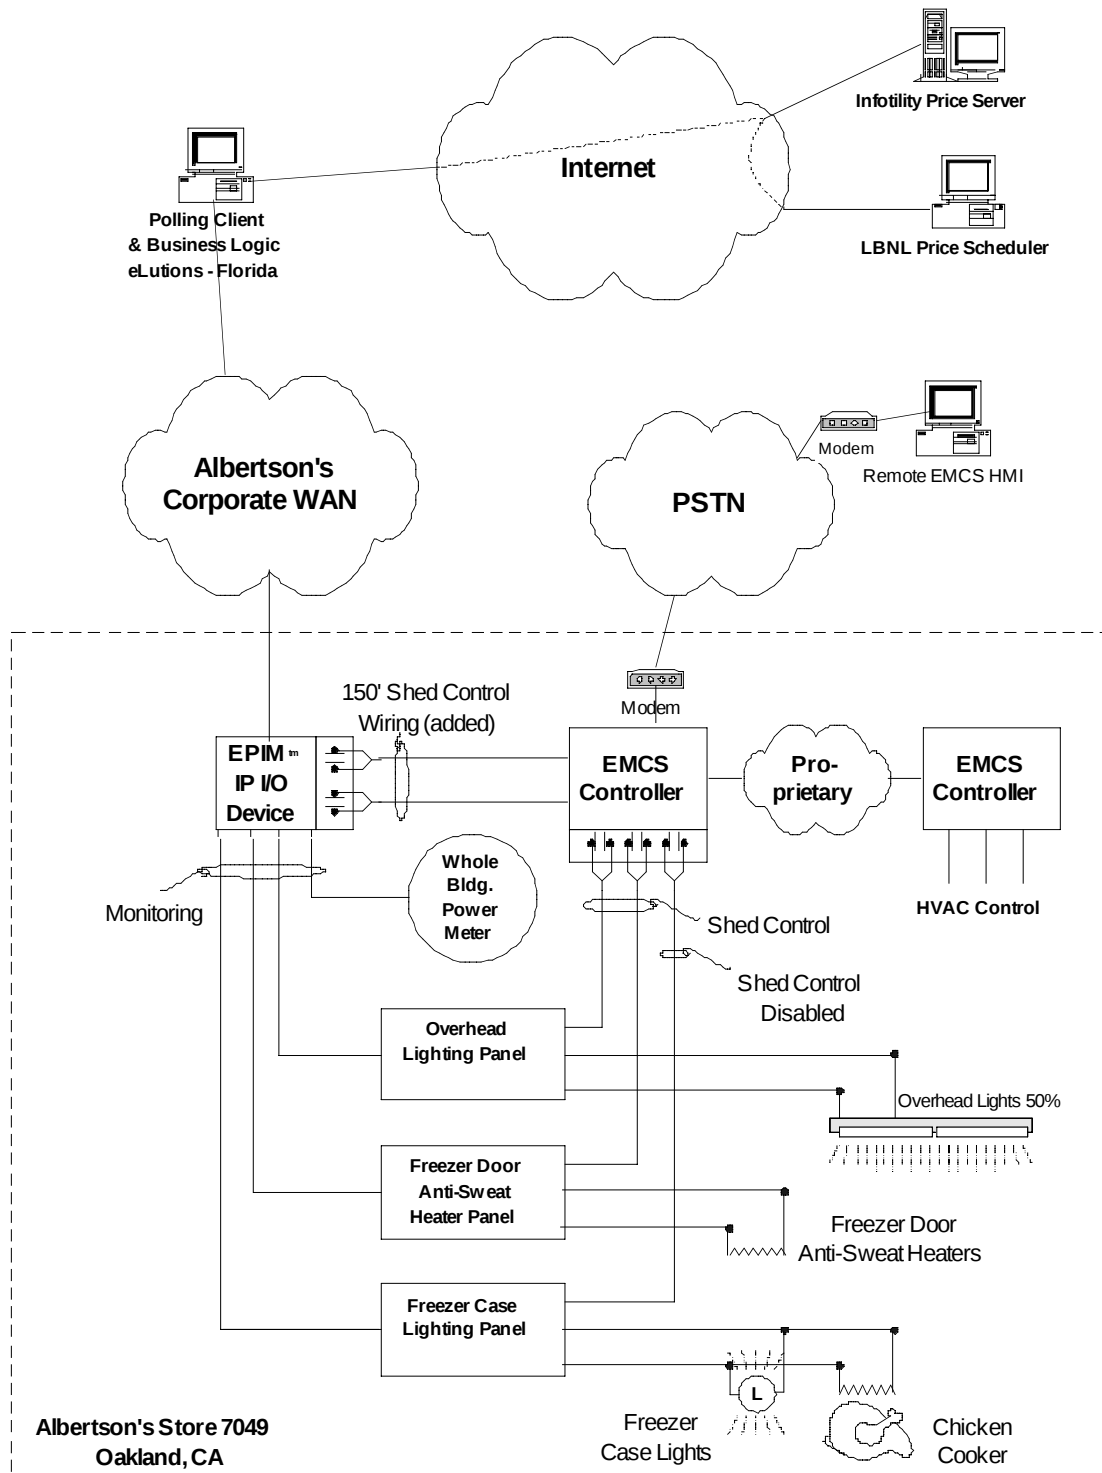


Figure 3-12. Albertsons – System Architecture

Bank of America Concord Technology Center (CTC)

Bank of America's Concord Technology Center (CTC) system architecture is shown in Figure 3.3.

EMCS

The B of A CTC buildings involved in the Auto-DR test use an open protocol (LonTalk) system by Trane for control and monitoring of the HVAC equipment. Inter-building connectivity is accomplished through use of another open protocol (BACnet).

Enterprise Network

B of A uses the corporate WAN and the Internet for remote telemetry to the EMCS and EIS. Connectivity between the enterprise networks and the EMCS networks is provided by Tridium JACE™ gateways. The gateways connect the BACnet EMCS (including electric meters) to the B of A enterprise WAN. The EMCS, EIS and Auto-DR data are transferred across the same enterprise network infrastructure used for bank financial transactions. At the B of A Network Operations Center (**NOC**) in Chicago, communications between the B of A WAN and the WebGen Polling Client / Business logic computer in Andover MA is established across the public Internet. Cisco Virtual Private Network (**VPN**) routers were used at both ends of the secure VPN "tunnel". WebGen also provided a Web server, hosted at the co-location site in Andover, Massachusetts, for visualization of the EMCS and EIS data.

EIS and Measurement

For the Auto-DR test, monitoring, archiving and visualization of energy data were accomplished through the use of three separate systems: PG&E (Interact), WebGen (IUE), and temporary sub-metering equipment.

InterAct is a Web based, whole site EIS provided by PG&E for large commercial customers. At the B of A CTC, site demand, individual building interval data, and weather data from NOAA can be monitored and trended. The data can be visualized in the following formats: Time-series, daily/monthly consumption summary, scatter plot, histogram and average daily profile. IUE's features include control, monitoring and data visualization. The control characteristics implemented for the Auto-DR test are described below. This system is also described in Motegi et al, 2003a. Since the existing site EIS systems did not measure electric data at the level of resolution required for the Auto-DR test, additional temporary sub-metering equipment was added.

Auto-DR System Description

WebGen system is designed to operate as an ongoing demand and energy reduction system. To save energy, the WebGen IUE system intermittently takes setpoint control away from local operators and gives control to the automated system in Andover. During these "interventions", duct static pressure setpoint is reduced on one VAV fan system at a time. The setpoint reduction was rotated between fans so as to share the reduction in service throughout the site.


The computer containing the Auto-DR polling client and business logic was hosted at WebGen's co-lo in Andover, MA. The business logic contains learning algorithms designed to maintain comfort while reducing energy costs. The Auto-DR price signal was intended to further reduce energy use.

WebGen has a unique feature that estimates the savings (dollars and kWh) that are realized each time the WebGen system causes control to vary from normal operation. At the B of A CTC site, sensors are not installed for fan power, fan airflow, or pressure drop across fans. Since data necessary to calculate the energy savings per intervention are not measured at this site, it is not possible for the WebGen system to make accurate estimates on a "per intervention" basis.

WebGen's site wide financial savings calculations are made using revenue grade electric meters. Savings are calculated as the difference between the measured whole site electric meter values (with shed interventions) and what the electric consumption "would have been" without the sheds. These calculations may be accurate within the constraints of normal regression analysis based on current standards of practice such as those used in the International Performance Measurement and Verification Protocol (IPMVP).

Shed Strategy

As fan duct static pressure setpoints are reduced to save fan energy, sensor data (temperatures, pressures, etc.) are evaluated. The system is designed to "learn" the effect reductions in the duct static pressure has on zone temperatures so as to minimize negative comfort impacts. Artificial Intelligence algorithms are used in these calculations. During the Auto-DR test, the system responded by reducing duct static pressure by 0.2" W.C. for 20 minutes per fan. Pressure reductions were rotated between fans in different buildings to maintain comfort and shed demand at the same time.

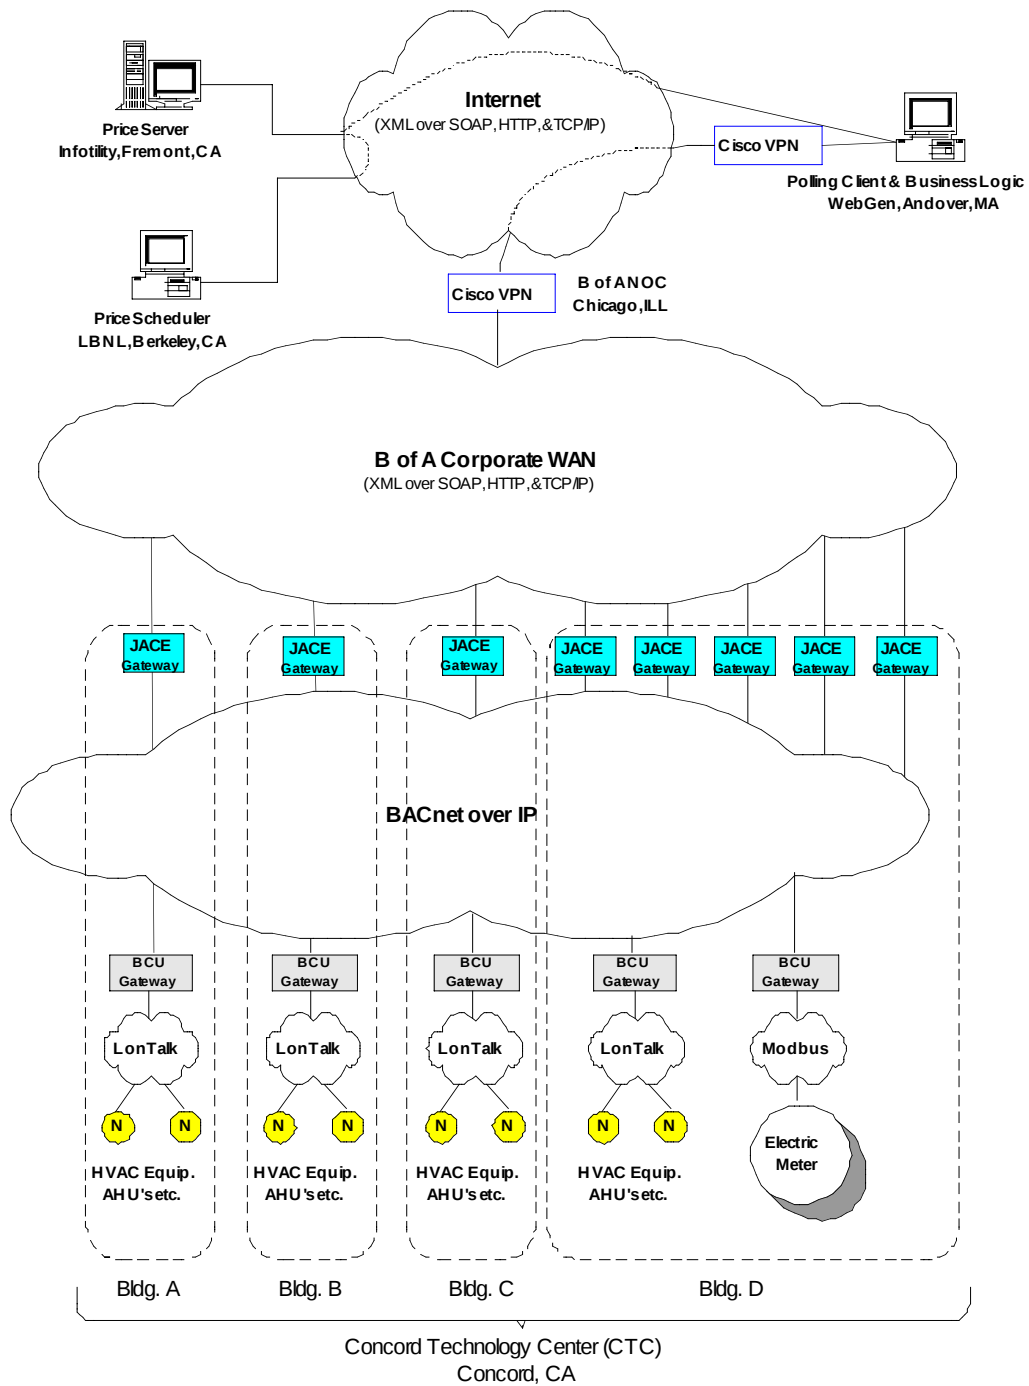

VPN = Virtual Private Network
NOC = Network Operations Center

Figure 3-13. B of A – System Architecture

General Services Administration – Oakland Federal Building, Oakland

The Oakland Federal Building system architecture is shown in Figure 3.4.

EMCS

A Johnson Metasys proprietary protocol EMCS is used to control the VAV fan system and central heating and cooling plants. Although they are not used for HVAC control, several Alerton BACnet open protocol devices were used to facilitate Auto-DR communications.

Enterprise Network

The Oakland GSA site is connected to an innovative enterprise network designed to improve the efficiency and operations of the connected buildings. GEMnet (GSA Energy and Maintenance Network) is being developed and implemented for energy management and building maintenance in over a dozen Federal buildings in the Pacific Rim Region. The enterprise network and DSL Internet connectivity were designed and implemented by controls and IT specialists within the facilities group of GSA.

EIS and Measurement

Monitoring, archiving and visualization of energy data were accomplished through the use of three separate systems: PG&E (Interact), EMCS trend logs, and temporary sub-metering. The Interact system monitors five interval meters throughout the building that collectively measured whole building demand and energy. Temporary sub-metering was added to this site to monitor four cold deck supply fans and two secondary chilled water pumps.

Auto-DR System Description

In the Auto-DR test, a polling client in Kelowna, British Columbia (BC) polled the Infotility price server in Fremont. Upon a rise in price, the business logic in the BC computer posted a value that represented shed mode (normal, shed level 1, shed level 2) to the main GEMnet SQL database. A custom software application called BACnet reader polled the SQL database every 2 minutes. When the mode value changed to a shed mode, BACnet reader commanded an Alerton I/O controller with 2 digital outputs (via a software gateway by PolarSoft and an Alerton LSI TCP/IP to **BACnet MSTP gateway**) to close either one or two relay contacts. An I/O controller with two digital inputs read the relay contacts. The shed strategy was then implemented throughout the Johnson EMCS.

Shed Strategy

GSA employed a global zone temperature setpoint setup/setback shed strategy (Figure 3-6). Upon commencement of a shed (due to price increase), the zone temperature setpoints for all of the individual zones in the building were “relaxed”. In other words, if fan and cooling energy is being used to keep a given zone from rising above 74°F, a new setpoint is issued to keep it from rising above 76°F. Similarly, zones that have heating setpoints are relaxed to allow zones to get slightly cooler before using more energy. When this approach is applied to all of the zones in the building, substantial energy can be saved.

Table 3-8. Oakland GSA Zone Temperature Setpoints - Normal and Shed Modes

Shed Mode	Zone Heating Setpoint	Zone Cooling Setpoint
Normal	70°F	72°F
Level 1 (\$0.30/kWh)	68°F	76°F
Level 2 (\$0.75/kWh)	66°F	78°F

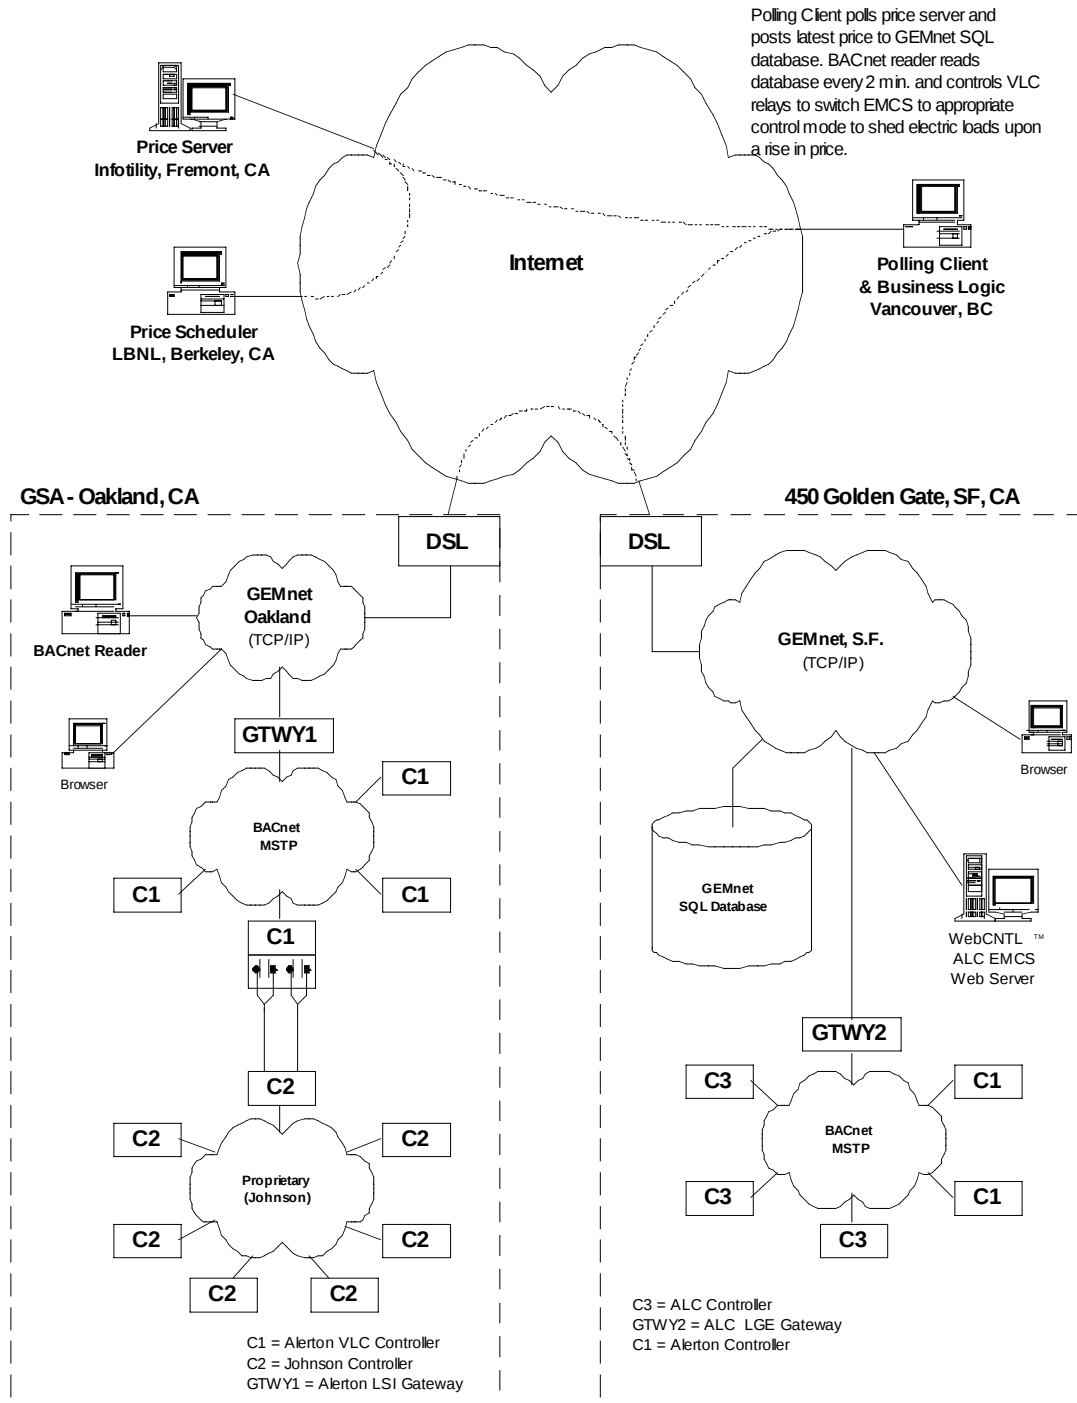


Figure 3-14. GSA Oakland – System Architecture

Roche Pharmaceuticals Palo Alto

The Roche Pharmaceuticals system architecture is shown in Figure 3.5.

EMCS

The EMCS at the Roche site is comprised primarily of Invensys products. There are at least two **generations** of Invensys products used: Network 8000 (proprietary protocol RS-485) and the I/A product line (open protocol LonTalk). In addition, open protocol Modbus and proprietary RS-485 (different from the Network 8000) are used for electricity monitoring. These diverse systems are tied together into one common user interface and database by the Tridium Niagara framework. The Tridium system uses embedded gateways to translate from each aforementioned EMCS protocol to TCP/IP.

Enterprise Network

The Tridium system provides password-protected access of the EMCS data via any Web browser within the Roche corporate **intranet**. Due to security concerns and lack of compelling reason to do otherwise, the Tridium EMCS/EIS Web browser is not accessible from the public Internet.

Due to security concerns, the polling client was installed just outside of the Roche secure intranet in a **DMZ** region⁸. A special virtual connection was made between the Tridium computer inside the secure Roche intranet and the polling client computer that is located in the DMZ. This allows the polling client easy, two-way communication with other computers in the public Internet, while not exposing the Roche network to security concerns associated with the Internet.

The polling client computer also served another purpose. To aid in the data collection requirements of the Auto-DR project, about 40 EMCS points were extracted from the Tridium system and logged and archived on a computer outside of the Roche secure network. These data were made available to LBNL researchers in Berkeley in near real time.

EIS and Measurement

Monitoring, archiving and visualization of energy data were accomplished through the use of three separate systems: Tridium (Vykon™), Pegasys (PML™), Infotility Real-Time Energy Tracker (RTET). Tridium Vykon provided Internet based control and trending for Roche inside their **firewall**. RTET is a real-time Infotility Web-monitoring tool designed specifically for this project. It was developed to overcome the remote data access problems related to Roche's Internet firewall. RTET was used to transmit energy data from the Tridium computer to the Infotility server where it could be accessed remotely by project researchers. The Pegasys system provided electricity, gas, steam and water metering. It was used to obtain data for three buildings (A2, SS and FS). The PEGASYS PML is a closed-network system that is only accessible within the site.

⁸ "Short for demilitarized zone, a computer or small subnetwork that sits between a trusted internal network, such as a corporate private LAN, and an untrusted external network, such as the public internet", Webopedia. 2004. <http://www.webopedia.com/TERM/D/DMZ.html>. Viewed on Mar. 15, 2004 .

Considerable effort was required to determine how to download and analyze the PML™ data.

Auto-DR System Description

No extra hardware was required to enable the Roche site's Auto-DR functionality. Communication from the price server to the EMCS I/O controllers occurred via networks. The increased price was sensed by the polling client and passed through to the Tridium system where it was read by the EMCS.

Shed Strategy

The shed strategy implemented at Roche is simple: when the price rises to \$0.30/kWh, several constant volume fans are shut off. When the price rises to \$0.75/kWh several more fans were turned off. This strategy was very effective at immediately reducing electric load. It is also a rather severe measure to impose upon occupied areas, especially in hot weather. For the Auto-DR test, the fans that were selected for shedding and the strategy employed were carefully selected by building operators to minimize adverse effects on occupants.

The fan systems serving the selected areas have dual supply fans that operate in parallel. The return fan systems have a similar dual fan configuration. During the shed, only one of the fans in each parallel system was disabled. Because of this, about half of the normal air supply continued to flow into the buildings while the shed was in effect.

The fans involved in the shed serve the cafeteria. Since the test was conducted in the mid-afternoon, the lunchtime crowd was gone and the cafeteria had very few occupants. Similarly the facility's office and administration auditorium had low occupancy during the test. Zone temperature and system CO₂ sensors indicate that there was a minimal impact on the comfort of the areas affected by the shed. Temperature did not measurably deviate from setpoint and CO₂ level decreased during the shed.

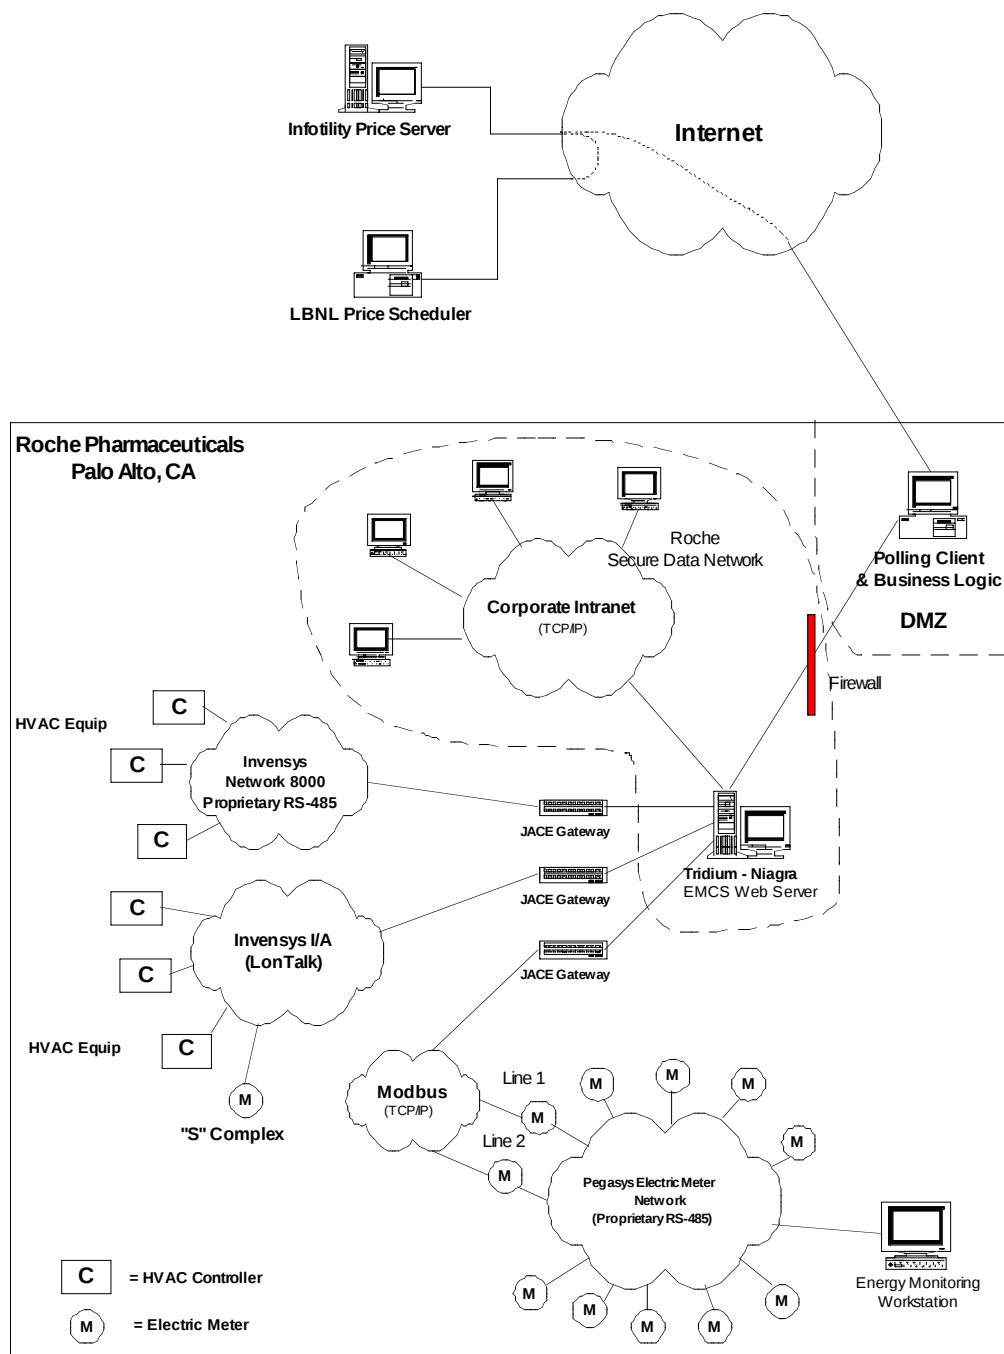


Figure 3-15. Roche – System Architecture

University of California Santa Barbara

The University of California Santa Barbara system architecture is shown in Figure 3.6.

EMCS

A Johnson Metasys proprietary protocol EMCS is used to control the HVAC systems on the UC Santa Barbara campus. Two versions of the Johnson protocol are used: “N2” communications between I/O controllers within each building and the much faster “N1” which communicates between buildings over the campus intranet.

Enterprise Network

The facilities department has its own enterprise subnet, separate from UCSB campus network. This subnet includes Johnson gateways (TCP/IP to N1) and several computers used by the facilities department staff. The polling client and business logic software was installed on the existing SiE server which also resides on the facilities department subnet. An IP relay was added for the Auto-DR test.

EIS and Measurement

All of the data required for the project was collected through the Itron EEM Suite™, a Web-based EIS for monitoring and analyzing building energy data. EMCS data points can be mapped over to the EEM system so they can be visualized or analyzed within the same environment as the energy data. The scope of the monitoring for the Library II, III, and IV included electric power, gas consumption, cooling energy delivered to the building (Btu meter) and estimated chiller power (based on an average kW/ton).

Auto-DR System Description

In the Auto-DR test, a polling client polled the Infotility price server in Fremont. Upon a rise in price, the business logic directly commanded the IP I/O controller to close either one, two or three relay contacts. The number of contacts closed correspond directly to the three shed modes (normal, shed level 1, shed level 2). The relay contact positions were read by a Johnson I/O controller with three digital inputs.

Shed Strategy

The following shed strategy was performed at the UCSB Main Library:

As the electricity price rose to the following values, the associated measures were employed:

- \$0.30/kWh
 - Measures applied to three supply fans in the library complex:
 - Supply fan Variable Frequency Drives (VFD) were limited to 70% speed.
 - Economizer mixing dampers were forced to 100% outside air.
- \$0.75/kWh
 - The speed of the three supply fans was further reduced to a 60% limit
 - The speed of two additional supply fans was reduced by lowering the static pressure setpoint to 0.4 IWC.

Economizer mixing dampers were forced to 100% outside air.
The heating and cooling valves of all five fans were forced to 0% (closed).

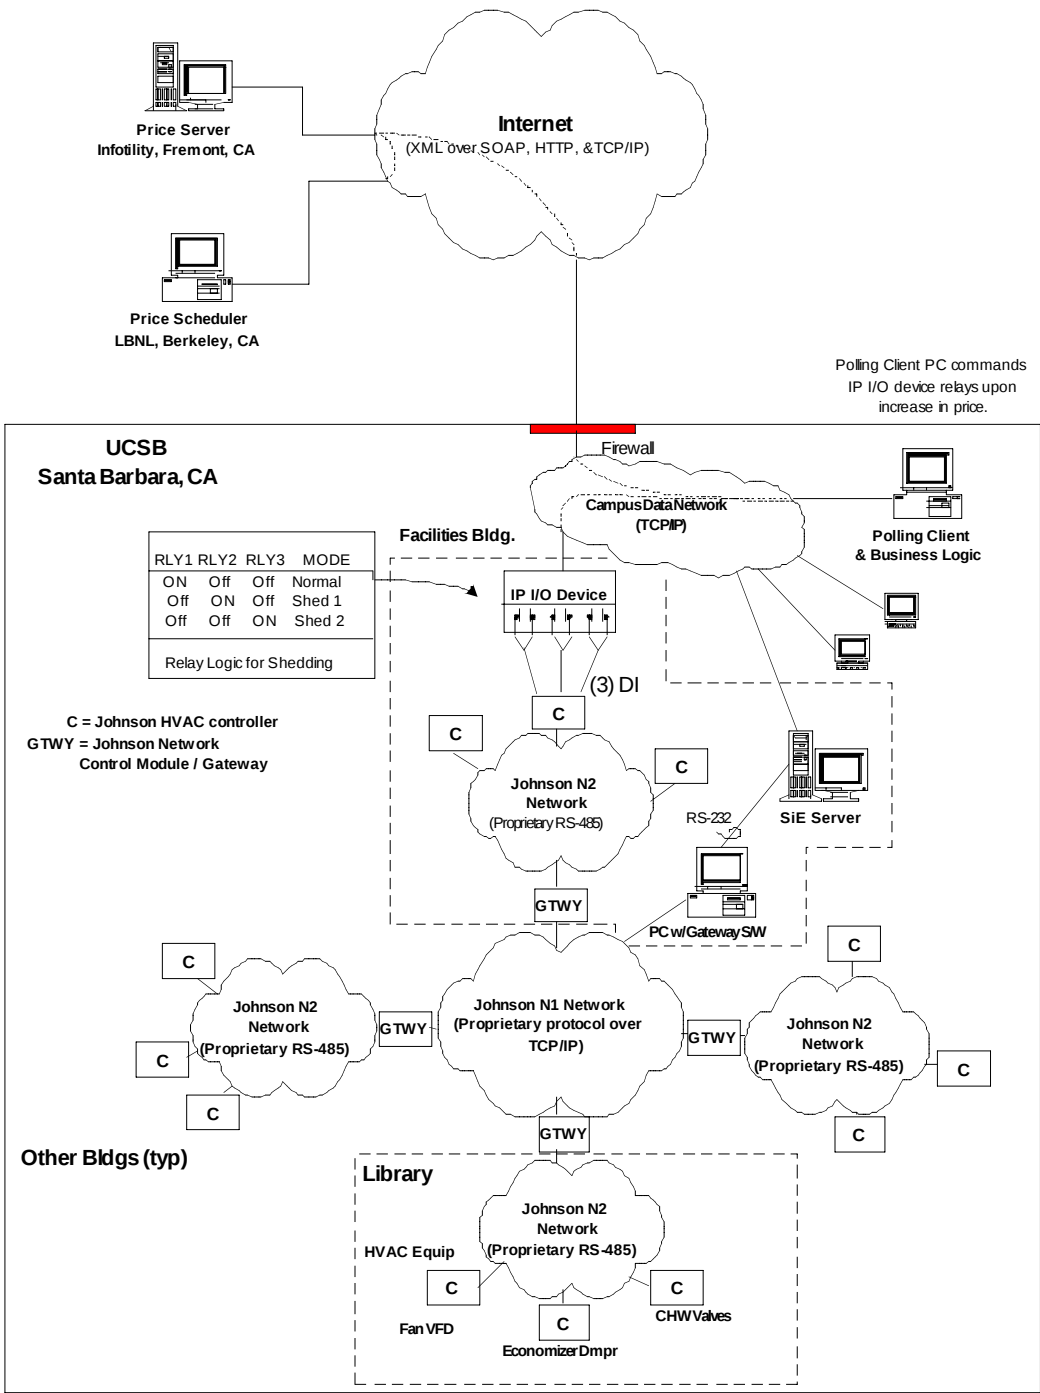


Figure 3-16. UCSB – System Architecture

3-2 Site Measurement and Evaluation Techniques

This section describes the site measurement and evaluation techniques used to measure the electric demand shed. Measurement techniques were developed to evaluate each 15-minute increment of the three-hour electric shed event. Where possible, we also developed non-energy measurements focusing on temperature or other indoor air environmental factors (see Section 4). The shed events were followed by interviews with facility operators to inquire about any loss of service or problem that may have resulted from the shed strategy (See Section 4 and Appendix V).

Numerous sources of data were used to measure and evaluate the load shedding. Table 3-7 summarizes the measurements at each site, showing the type of system, types of data collected, number of data points used from the system, frequency of data measurement, and whether it had Web-based data access. Detailed point lists are included in Appendix VI. All five sites had some form of an EIS. Multiple sources of data including EIS, EMCS, and submeter were used in four of the five sites. At Albertsons, only one EIS was used for data collection and analysis. At the four sites with multiple sources of data, significant re-configuration of the EMCS and EIS trending points was required.

Table 3-9. Measurement Summary

Site	Type	Data type	# of points used	Data freq.	Web-based access
Albertsons	EIS	WBP, Overhead lighting, Anti-sweat heaters, OAT	4	15 min.	Yes
B of A	EIS	WBP, Fan (status, temp, VFD, air flow, static pressure)	35	5 min.	Yes
	EIS	WBP, OAT	2	15 min.	Yes
	EMCS	Chiller power, Chilled water energy Control status	21	15 min.	No*
	Submeter	<i>Meter installed:</i> Fan power, Individual building power	8	1 min.	No
GSA	EIS	WBP, OAT	6	15 min.	Yes
	EMCS	WBP, Chiller power/energy Fan (status, temp, VFD, air flow, static pressure) Cooling tower, Pump (status,VFD) Zone temp	100	5-15 min.	No
	Submeter	<i>Meter installed:</i> Fan power, Pump power	6	1 min.	No
Roche	EIS/EMCS	<i>Newly trended EMCS points:</i> Fan status, Zone temp, CO ₂	19	5 min.	Yes
	EIS	Individual building power	3	15 min.	No
	Submeter	<i>Spot measurement:</i> Fan power			No
UCSB	EIS	WBP, Chilled water energy, OAT <i>Newly trended EMCS points:</i> Fan power, VFD, static pressure Economizer position, Zone temp Cooling and heating valve position	150	5-15 min.	Yes
	EMCS	Trends through EIS			No

WBP – whole building power; OAT – outside air temperature; VFD – variable frequency drive;
CO₂ – carbon dioxide * Web access was not available to LBNL because of firewall security.

Demand savings were derived by subtracting the actual metered electric consumption from the baseline consumption. The baseline consumption is an estimate of how much electricity would have been used without the demand shedding. We developed several methods to estimate baseline electricity consumption. Each building was evaluated using two methods: 1) a whole building, or top-down, and 2) a component level, or bottom-up method.

Whole-Building Level Method

The whole building, or premise-level, top-down, analysis method consists of developing a whole-building electrical power baseline load shape. Whole building power is estimated using a weather regression model that assumes whole building power is linearly correlated with outside air temperature (OAT). The OAT data is from local weather stations. Input data are 15-minute interval whole building demand and hourly OAT. This method was derived from previous work at LBNL (see KEMA-Xenergy, 2003). In the previous work, this method was tested with the GSA data, and statistically proven to be a better estimate than the conventional method of simple averages⁹ when the WBP has a linear correlation with OAT. The model is computed as;

$$L_{15min} = a_{15min} + b_{15min} T_h$$

where L_{15min} is the predicted 15-minute interval electric demand from the previous non-controlled working days. The number of previous days used in the model was selected to make the best use of available metered data. Depending on frequency of available weather data, T_h is the hourly or 15-minute interval OAT. a_{15min} and b_{15min} are estimated parameters generated from a linear regression of the input data. Separate regression equations are developed for each 15-minute interval, resulting in 96 regressions for the entire day (24 hours/day, with four 15-minute periods per hour). An example of the OAT linear regression model is given in Appendix II.

To develop the baseline electric loads for the demand sheds we selected 18 “non-shed” days. These 18 baseline days were non-weekend, Monday through Thursday workdays. Fridays were eliminated in the development of the baseline because the UCSB Library has a different operating schedule on Fridays. The selection of the baseline days was based on availability of whole-building data at each site. The submetering for Building B at Bank of America was installed on October 15th, which was the first day of the 18-day baseline period. The November 11th Veterans Day holiday was not included in the baseline.

Figure 3-7 shows an example of the whole-building level baseline time-series chart on the second test day (GSA). The chart shows whole building power for the shed (the lower curve) and the whole-building baseline power predicted if the shed had not occurred. The vertical line at each baseline power data point is the standard error of the

⁹ California Independent System Operator (Cal ISO)’s Demand Response Program used “previous 10 business days baseline”, which is a simple average of previous days.

regression estimate. The vertical lines at 1:15 pm, 2:15 pm, 3:15 pm, and 4:15 pm identifies time intervals during which price signals were different.

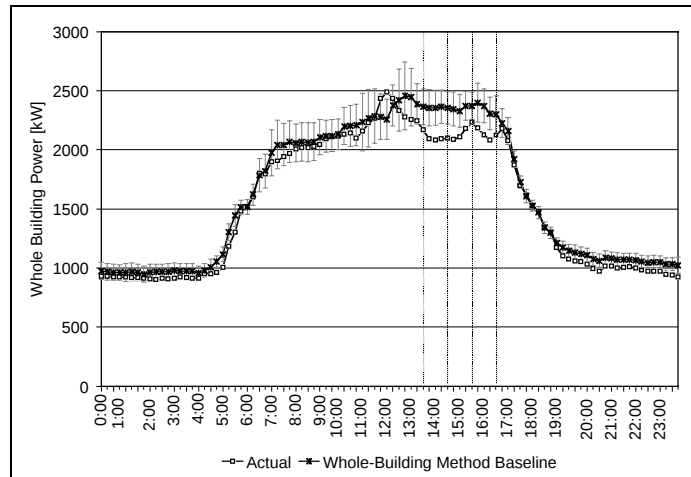


Figure 3-17. Example of Whole-Building Method Baseline

Component Level Method

The component level, or bottom-up evaluation method develops the WBP savings by combining the demand savings estimates for each component. The basic procedure is to: 1) develop a baseline for each controllable component, 2) estimate the demand savings for the component by subtracting actual demand from the baseline, and 3) sum all the controllable load demand savings. The component level estimation method requires analysis of either direct power measurement or operational data for each controllable component. The component level method is more accurate than the whole-building method if the controllable load and non-controllable load can be accurately measured. We developed several methods to develop the component level baseline load shape. These methods are described below.

Equipment Schedule Method

The controllable component “normal-day” operational load shapes can be used to define a baseline if the equipment schedule is well defined and consistent. This method can be applied to components with simple operational modes. This method is very accurate if the operation is simple enough to extrapolate electricity demand. A weather-sensitive component load can not be evaluated using this method. Examples of components that can be evaluated using this method include constant volume fans operating with a fixed schedule and non-dimmable lighting.

Outside Air Temperature Regression Model Method

If the component’s electricity demand is weather sensitive, a simple average of the previous days’ demand may provide a lower baseline demand if the controlled day’s temperature is higher than that of the previous days. In this case, the estimate can be adjusted for OAT. This method forecasts the component demand by a regression model similar to the whole-building level method. The 15-minute component electric demand

plus hourly OAT data are used. Examples of components evaluated with this method include chillers and fans with VFDs.

Prior Time Load Method

If the results of the equipment schedule or outside air temperature regression model methods do not accurately fit the actual demand data, the forecast demand may be estimated from the data at 15-minute to a few hours immediately preceding the test. This is a rule-of-thumb method. This method may be applied only when the equipment operation is stable without the shed strategies, and the daily load shape is similar over the previous days. Depending on the demand profile, the calculation method can be selected from either using previous operation hours or previous 15-minute demand, or drawing a line from the pre-shed demand and the post-shed demand. This method should be used when the shed period is short, and there is no shed strategy applied in advance (such as pre-cooling).

Table 3-8 summarizes the component-level savings estimation methods used for different components at each site. There are various reasons why different evaluation methods were used for the same type of equipment at different sites, due to load shapes and available data at each site.

Table 3-10. Component Level Methods for Each Component

Site	Component	Equipment Schedule	OAT Regression	Prior Time Load
Albertsons	Sales lightings	✓		
	Anti-sweat heater			✓
B of A	Fan system			✓
GSA Oakland	Fans		✓	
	Chillers		✓	
	Pumps		✓	
	Cooling towers		✓	
Roche	Fans	✓		
UCSB	Fans		✓	✓
	Chillers		✓	

Figure 3-8 shows a component level method baseline time-series chart from the Roche site. The chart shows the fan energy, total building energy and component savings.

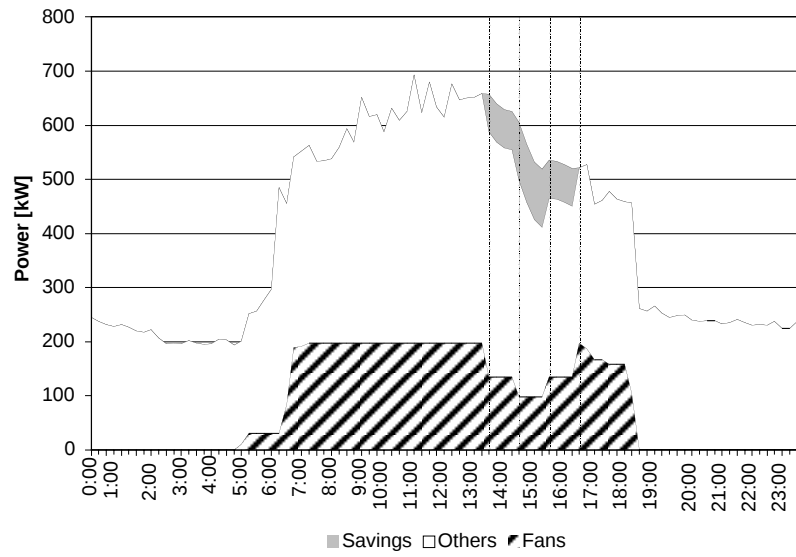


Figure 3-18. Example of Component Method Baseline - Roche

4. Results

This section discusses the results of the Auto-DR tests, including: discussions regarding the receipt and confirmation of the XML price signal; discussion of the demand shedding measurements; and non-energy measurements.

4-1 Requesting and Confirming Receipt of Signal

Infotility developed a user interface for LBNL to verify communications between the polling clients at each site and the price server. Table 4-1 shows the communications recorded during the period when the price changed from \$0.30/kWh to \$0.75/kWh during the November 19th Auto-DR test. From this interface, we verified that participants were polling of the correct price channel (identified as Price_LBNL1 channel in Table 4-1). We also could view the polling frequency of each participant and determine if they interpreted the signal correctly (“Price sent by server” and “Price returned by user”).

Table 4-11. Record of Prices Being Requested and Receipt Being Confirmed

<u>ChannelID</u> [asc]	<u>Channel</u> <u>Description</u>	<u>UserID</u>	<u>UserName</u>	<u>When</u> <u>requested by</u> <u>user</u>	<u>Timestamp</u>	<u>Price sent</u> <u>by server</u>	<u>Price</u> <u>returned by</u> <u>user</u>	<u>When</u> <u>returned by</u> <u>user</u>
1233	Price_LBNL1	389	gsa,cpu1_	11/19/2003 1:45:22 PM	11/19/2003 2:00:00 PM	0.3	0.3	11/19/2003 1:59:37 PM
1233	Price_LBNL1	402	boa,cpu1_	11/19/2003 1:45:30 PM	11/19/2003 2:00:00 PM	0.3	0.3	11/19/2003 1:46:31 PM
1233	Price_LBNL1	385	ucsb,cpu1_	11/19/2003 1:45:35 PM	11/19/2003 2:00:00 PM	0.3	0.3	11/19/2003 1:46:36 PM
1233	Price_LBNL1	392	roche,cpu1_	11/19/2003 1:45:44 PM	11/19/2003 2:00:00 PM	0.3	0.3	11/19/2003 1:46:44 PM
1233	Price_LBNL1	397	albertsons,cpu1_	11/19/2003 1:47:05 PM	11/19/2003 2:00:00 PM	0.3	0.3	11/19/2003 1:50:13 PM
1233	Price_LBNL1	389	gsa,cpu1_	11/19/2003 2:00:22 PM	11/19/2003 2:15:00 PM	0.75	0.75	11/19/2003 2:14:37 PM
1233	Price_LBNL1	402	boa,cpu1_	11/19/2003 2:00:38 PM	11/19/2003 2:15:00 PM	0.75	0.75	11/19/2003 2:01:40 PM
1233	Price_LBNL1	392	roche,cpu1_	11/19/2003 2:00:44 PM	11/19/2003 2:15:00 PM	0.75	0.75	11/19/2003 2:01:44 PM
1233	Price_LBNL1	385	ucsb,cpu1_	11/19/2003 2:00:50 PM	11/19/2003 2:15:00 PM	0.75	0.75	11/19/2003 2:01:50 PM
1233	Price_LBNL1	397	albertsons,cpu1_	11/19/2003 2:02:05 PM	11/19/2003 2:15:00 PM	0.75	0.75	11/19/2003 2:05:14 PM

4-2 Demand Shed Savings Estimates

This section reviews the results of the second Auto-DR tests, which were more successful than the first-day test results. The first-day results are described briefly. For each site, both whole-building and component level savings estimates are discussed. For GSA, Roche, and UCSB, additional indoor environmental conditions were monitored and are discussed.

Shed Strategies and Results of Response

Table 4-5 summarizes the shed strategies used at each site. Though some sites failed to implement some of the strategies for the first test, all the sites eventually implemented all the strategies for the second test. Albertsons disabled their anti-sweat heater shed strategy for the first test due to an electrical wiring issue. BofA didn't respond to the signal for the first test. GSA didn't poll the price signal for the first test. Roche succeeded for the both tests. The UCSB fan VFD limit strategy failed for the first test, though the cooling valve shed was successful. On the second test day, all the sites achieved all the shed strategies as planned. (See Appendix VII for more details regarding the first test).

Table 4-12. Shed Strategies and Results of Response

		Albertsons		B of A		GSA		Roche		UCSB	
		1st	2nd	1st	2nd	1st	2nd	1st	2nd	1st	2nd
HVAC	Global zone set-point increase					ⓧ	○				
	Direct control of fans							○	○	ⓧ	○
	Reset duct static pressure			ⓧ	○					○	○
	Reset cooling and heating valves									○	○
Lighting	Reduce ambient lighting	○	○								
Other	Reduce Anti-sweat Heaters	ⓧ	○								

○: Succeeded.

ⓧ: Planned, but failed.

Saving Analysis by Site

During the Auto-DR tests, whole building and controllable component demand were measured at all five sites. The demand savings were calculated by the savings verification methods defined in Section 3-2. This section describes procedures to develop component level baselines corresponding to each site's shed strategies. Since each building has unique shed strategies and data trending, the component level saving calculation methods are customized for each site and each component. The non-energy results are also discussed for sites where comfort measurements are available (zone temperature and/or carbon dioxide (CO₂) concentration).

Albertsons

Saving Verification Methods

Albertsons' shed strategies controlled non-HVAC components, overhead lights and anti-sweat door heaters. Since these components are not weather-sensitive, the component-level baseline method was straightforward. Fifteen-minute interval electric demands of

WBP and the two controlled components were collected by the site's eLutions System. Baseline method for each controllable component is described below.

Overhead Lights

The equipment schedule method is used to calculate the shed values for this component. The overhead lights are 100% on during store hours, from 6:00 am until midnight. The electric demand of the overhead lights during the store hours was constant over the two week period (average 42.7 kW, minimum 41.8 kW, and maximum 43.5 kW). The average demand of 42.7 kW is used as baseline for the shedding period.

Anti-sweat Door Heaters

The anti-sweat door heaters were not well modeled with an OAT regression model. The previous days' anti-sweat door heater loads were flat during the afternoon period. An assumption could be made that these loads may also remain flat during the test period if the shed didn't occur. Thus, the baseline was estimated from the previous 15-minute load (before the first higher price signal).

Saving Results

Figure 4-1 shows, for the second day test, the whole-building method baseline and the calculated test period whole building power. Albertsons achieved maximum demand savings of 10% at 2:45 pm to 3:00 pm during the \$0.75/kWh period.

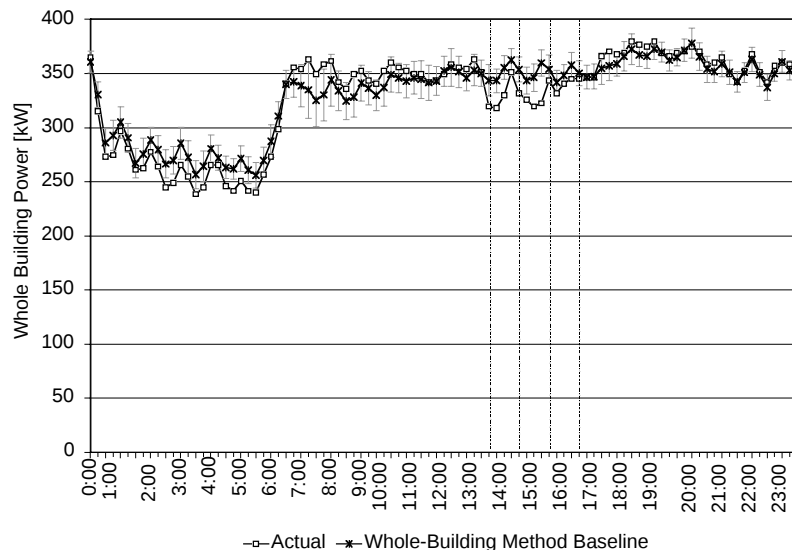


Figure 4-19. Albertsons – Whole Building Power and Baseline (Whole-Building Method)

At 1:00 pm, upon the reception of \$0.30/kWh signal, the overhead lights were shed by the strategy. The whole building power dropped by 31 kW. The whole building power spiked up by 21 kW at 1:45 pm (see Figure 4-1). The sub-meters of the controllable components measured no increase of power consumption, so this increase was due to other, non-controlled, components at the site. The whole building power dropped again by 19 kW at 2:00 pm, due to the anti-sweat heaters shutdown strategy activated by

\$0.75/kWh signal. The demand rose by 21 kW at 3:00 pm due to turning on the anti-sweat heaters at the end of \$0.75/kWh signal. The end of the overhead lights shed couldn't be identified in the whole building power because of confounding factors in the non-controllable loads.

Figure 4-2 shows the actual demand and savings by the component method. The demand saving result of this method was slightly higher than that of the whole-building method. This is because of the demand increase in non-controllable component as mentioned earlier.



Figure 4-20. Albertsons – Whole Building Power and Savings (Component Method)

Figure 4-3 shows electric demand of the overhead lights and the anti-sweat door heaters. Both components clearly show the demand curtailment. The overhead light demand dropped by 27 kW (62%) at 1:00 pm (15 minutes before the \$0.30/kWh time period started) and came back at 4:00 pm (15 minutes before the \$0.30/kWh time period ended). The anti-sweat heaters demand dropped 15 kW (15%) at 2:00 pm and came back at 3:00 pm. A maximum of 42 kW (65% of total controllable load) was shed from 2:00 pm to 3:00 pm. Both components reacted immediately after receiving the 15-minute ahead price signal.

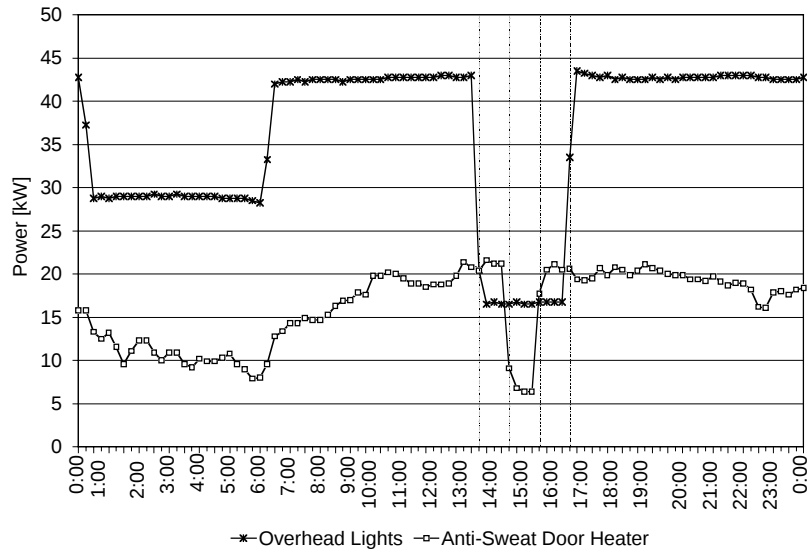


Figure 4-21. Albertsons – Overhead Lights and Anti-Sweat Door Heaters

B of A

Saving Verification Methods

As originally planned, Building B was analyzed for demand savings during the Auto-DR test. The site's EIS (WebGen) was designed to conduct sheds for the entire facility, which included three large office buildings. Duct static pressure reset was used to shed the supply and return fan demand during the test. The supply fans and the return fans of Building B were considered to be the controllable components. Looking at the measured data, the fan power was not well modeled with an OAT regression model. Therefore, the prior time load method was used for this saving analysis. The previous 15-minute demand was used as its baseline during the test period.

Saving Results

Figure 4-4 shows Building B's whole building power and whole-building method baseline. The demand shed realized was small, and no demand saving could be identified against the baseline, though there were several demand drops during the test ranging from 8 kW to 29 kW. Because the WebGen system rotated the shed strategy among the three buildings to minimize the indoor comfort impacts, each building's electric demand had several short-time demand sheds during the three-hour test period.

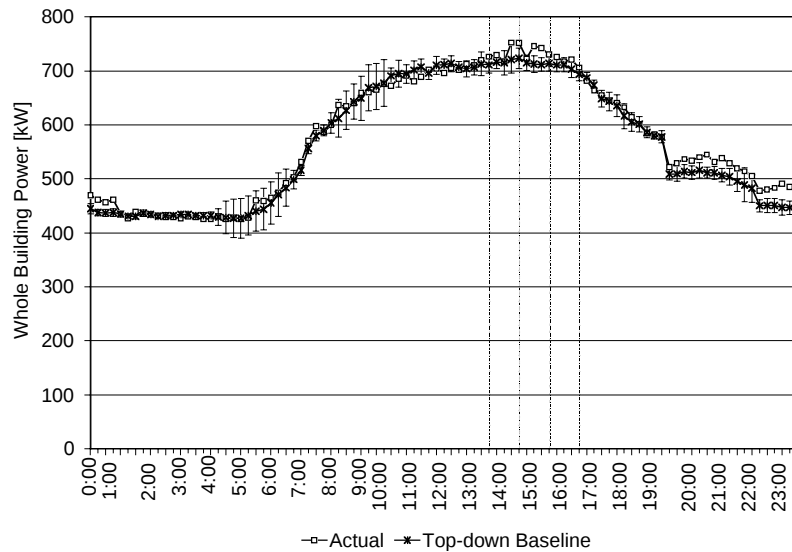


Figure 4-22. B of A – Whole Building Power and Baseline (Whole-Building Method)

Figure 4-5 shows the motor control center (*MCC*) electric demand, which includes all of Building B's supply and return fans and motors. The fan power was reduced three times during the three-hour test period. The demand shed ranged from 7 kW to 11 kW.

A WebGen analyst independently calculated the demand savings using WebGen's methodologies. The detail of the analysis is included in Appendix VII.

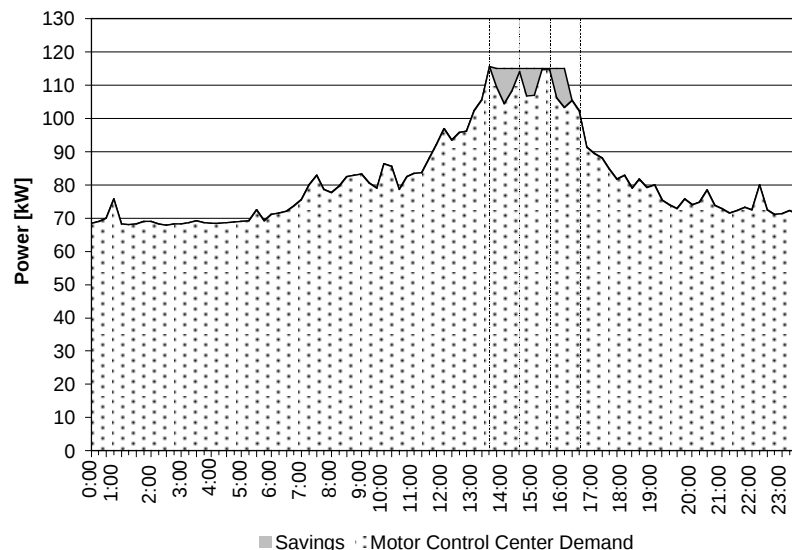


Figure 4-23. B of A – Motor Control Center

Figure 4-6 shows fan data from the WebGen Web-interface. The time-series graph shows static pressure, VFD speed, and supply air temperature. The static pressure was normally kept at 2.2 inches water column ("W.C.), but lowered to 2.0"W.C. due to the

static pressure reset strategy. The VFD speed was slightly reduced corresponding to the static pressure reset.

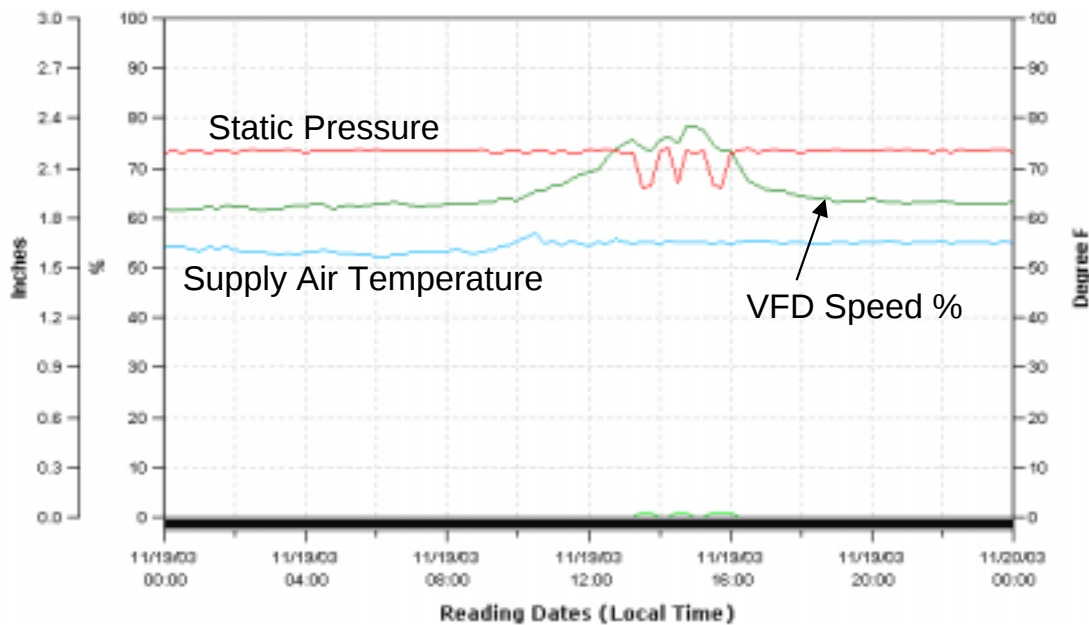


Figure 4-24. B of A – WebGen Chart

GSA

Saving Verification Methods

GSA's shed strategy implemented global zone temperature setpoint increase in cooling mode, and decrease in heating mode. The global setpoint temperature increase strategy affects most of the HVAC system end-use equipment controls. The HVAC components considered as the controllable components for this saving analysis include the chillers, primary and secondary pumps, cooling towers, and fans.

One issue impacting the analysis of the demand shed is that GSA's recently developed cooling strategy maximizes free cooling by cooling towers (tower free cooling). Because of this strategy, the chiller and the other related HVAC equipments operations provide an irregular load shape. Since this strategy has been implemented in some mornings before and during the 2-week test period, it is difficult to eliminate this irregular operational pattern from baseline input data.

End-use Equipment Demand Extrapolation

Although many of the GSA electric submeter points for their HVAC equipment were trended by the EMCS, some fan and pump submeter data necessary for the saving analysis were not directly trended by the EMCS. These values had to be extrapolated from other EMCS trend points. For constant volume systems, fan power was estimated based on equipment status and full load power from the mechanical specifications. For

variable volume systems, fan power was estimated from the VFD speed and scheduled power¹⁰.

End-use Equipment Demand Baseline

The OAT regression model method was used to develop a baseline for each controllable component for the saving analysis. Though internal loads mostly dominated the cooling loads in this building, we found that each component power has correlation against OAT. Individual baseline models were developed for the chillers, pumps, cooling towers, and fans respectively. This analysis is based on an assumption that the irregular patterns caused by the tower free cooling strategy would be averaged out by the model.

Saving Results

Figure 4-7 shows GSA's whole building power and the whole-building method baseline. Due to the tower free cooling operation in the morning, the chillers were off in the early morning, and turned on around 11:30 am. The whole building power peaked at 11:45 am because of the chiller startup. The global temperature setpoint increase (from 72 to 76 °F) was implemented at 1:00 pm responding to the 15-minute ahead \$0.30/kWh price signal. The whole building power dropped by 80 kW by 1:15 pm, and further dropped by 75 kW at 1:30 pm. Using the whole-building method, the maximum demand saving was 274 kW at 2:00 pm, which is 12% of whole building power. However, because the baseline includes the intermittent impact of the tower free cooling strategy, the baseline can have a wide error range.

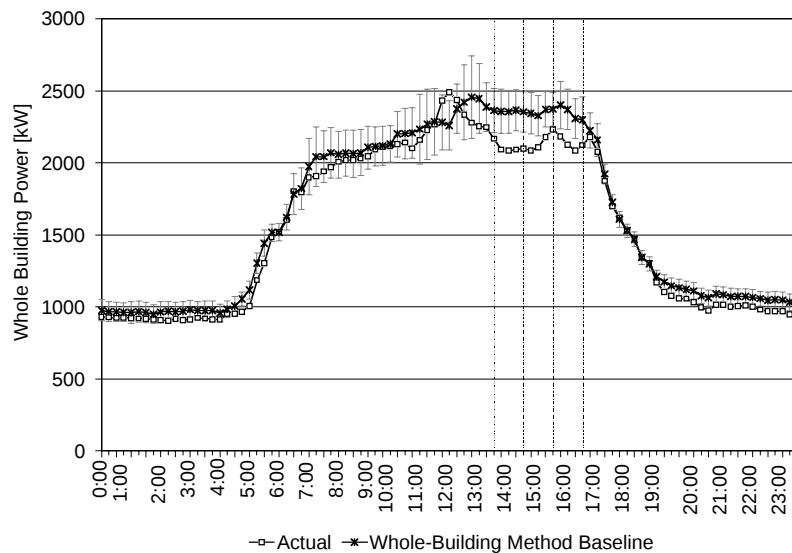


Figure 4-25. GSA – Whole Building Power and Baseline (Whole-Building Method)

Figure 4-8 shows whole building power, HVAC demand and savings by the component method. The OAT regression model was developed for each controllable component to estimate the savings. All of the component savings are summed. (See Appendix VII for

¹⁰ The equation used to calculate electric demand is: equipment demand [kW] = scheduled power [kW] x (VFD Speed [%])². Some adjustment factors are also applied based on comparisons of the calculated values to the submetered data.

the actual demand and OAT regression model graph of each controllable component). The maximum savings in whole building power by the component method was 240 kW (10%) at 3:45 pm.

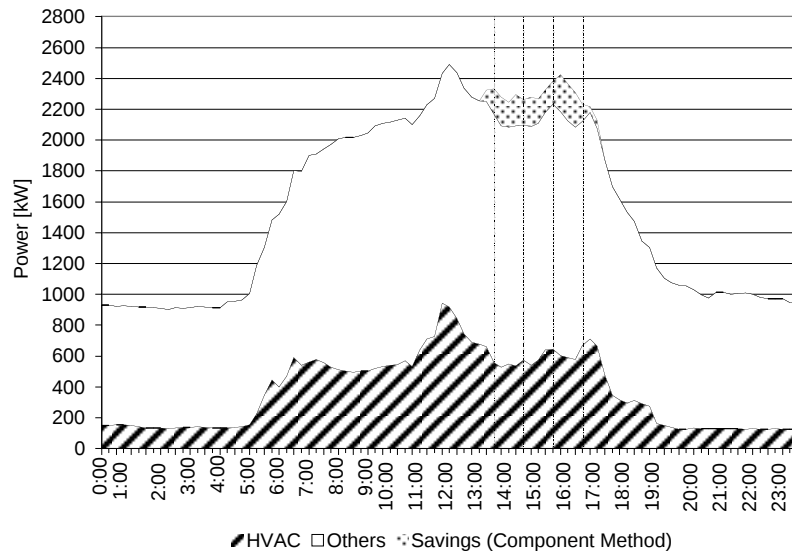


Figure 4-26. GSA – HVAC Demand and Savings (Component Method)

Figure 4-9 shows the electrical demand of each HVAC component. The fan power showed the largest demand savings in the HVAC components. The fan controls responded quickly to the price signal setting. The fan demand dropped by 71 kW at 1:00 pm and increased by 72 kW at 4:00 pm. The maximum demand saving of the fan power was 138 kW at 3:45 pm.

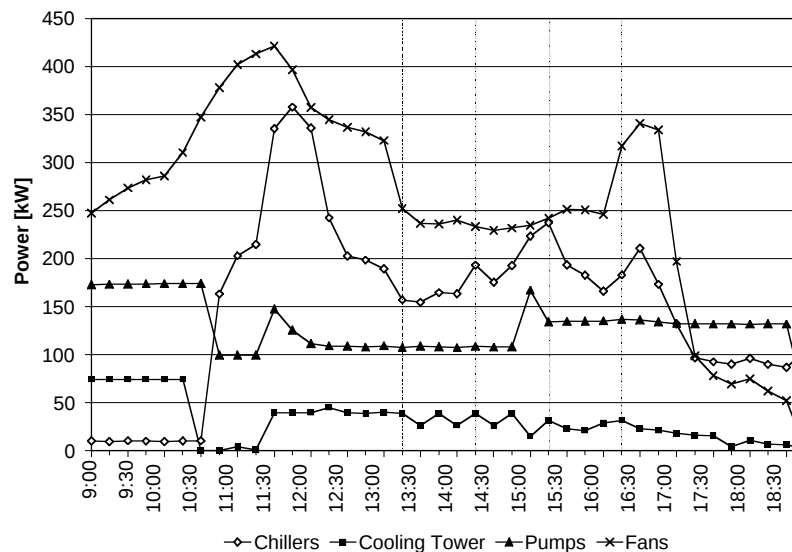


Figure 4-27. GSA – HVAC Component Demand

When the first \$0.30/kWh signal was received (1:00 pm), the setpoint increased from 72 to 76 °F. Since the zone temperature setpoints were kept at 72 °F before the test started,

the zones were “pre-cooled” compared to the 76 °F setpoint. The chiller power was reduced by approximately 40 kW until the zone temperatures rose to 76 °F. The chiller demand crept up little by little, as some zones were reaching 76 °F. By 2:15 pm, the chiller demand increased, probably because many zones reached 76 °F and required cooling. Right after the chiller demand rise, the \$0.75/kWh signal kicked in which increased the setpoint to 78 °F. The chiller demand dropped again. However, the zone temperatures soon reached the new setpoint and chiller demand rose again. At 3:00 pm, the chiller demand further increased by the second \$0.30/kWh signal which decreased the setpoint back to 76 °F. However, the chiller demand suddenly decreased after 3:15 pm. This may have been caused by a factor irrelevant to the shed strategy. The chiller demand increased again at 4:00 pm. when the setpoint decreased to 72 °F at the end of the test.

The pump electrical demand total contains the condenser water pumps, the primary chilled water pumps and the secondary chilled water pumps (See Appendix II for the pump demands on the test day). The pump demand increased to 167 kW at 2:45 pm responding to staging-up of the chiller operation, and stayed at 130 kW until the end of the day’s scheduled operation. Because the pumps support the chiller operation, pump demand did not respond to the price signal promptly. The cooling tower demand fluctuated significantly during the test period, and remarkable demand saving could not be determined.

Non-Energy Issues

Zone temperatures for 39 zones (25 zones from 6 floors in North Tower, and 14 zones from 3 floors in South Tower) were trended and analyzed at GSA. VAV damper positions (19 zones) were also collected. Figure 4-10 shows the average of the 39 zone temperatures during the test day, overlaid on the average zone temperature based on the previous 18 days. (See Appendix VII for time-series charts of the zone temperatures and VAV damper positions for each floor). During normal building operation, the average zone temperature was about 72 °F. During the shed, the average zone temperature rose by 1 °F (72 °F to 73 °F), although the shed strategy allowed the global temperature setpoint to increase to 76 °F at \$0.30/kWh, and 78 °F at \$0.75/kWh. The average zone temperature dropped to below 72 °F after the shed ended.



Figure 4-28. GSA – Zone Temperature

Individual zone temperature were also analyzed (see Appendix II). The controls for some zones responded to the global temperature setpoint strategy, with some zone temperatures increasing closer to or above 76 °F at the \$0.30/kWh signal, and 78 °F at the \$0.75/kWh signal. However, most of the zone temperatures were not affected at all. Most VAV boxes (17 of 19 collected) didn't change their damper positions during the test period. This may be because 1) the damper positions were less than 20% for most of VAV boxes which may be the minimum damper position allowed by the system in order to maintain minimum ventilation rates; and 2) the temperature difference might be within the control's deadband.

Although most of the monitored zones didn't respond to the setpoint increase strategy, some zones indicated temperature changes and the HVAC component electric data indicated demand savings due to the strategy. Since zone temperature and VAV damper position data was collected for a small subset of the zones, it is hard to determine what happened in the other zones.

Roche

Saving Verification Methods

Three Roche buildings, including A2 (office, auditorium), SS (office), and FS (cafeteria) participated in the Auto-DR test. Some of the fans in each building were turned off based on the price signal. Since all the fans are constant volume, the fan electric demand was extrapolated from the spot measurement data and normal operation schedule. Since the building's cooling loads are supplied from a cooling plant that serves multiple buildings, only the fan power is counted as a controllable load. We did not evaluate whether there was any reduction in the cooling loads supplied to the buildings from the central plant.

Saving Results

Figure 4-11 shows the whole building power and the whole-building method baseline applied to all three buildings. The power measurements for each building and the whole-building baseline models are shown in Appendix VII. Building FS (cafeteria) electric demand had several spikes in the morning because of food preparation. Building FS demand declined rapidly after 1:00 pm because occupants left after lunchtime. Building SS changed its equipment operation on October 30th, and reduced approximately 50 kW of its demand. The whole-building method may project higher demand savings than expected, because the whole-building method baseline was affected by the demand profile change of Building SS.

The whole-building analysis (including all the three buildings) indicates that Roche achieved maximum 164 kW (28%) of demand savings from 2:45 pm to 3:00 pm. The levels of demand shed due to the different price signals can be clearly seen in the demand profile. The whole building power dropped by 71 kW at 1:00 pm at the first \$0.30/kWh signal due to the implementation of the fan shed strategy. The demand dropped further by 57 kW at 2:00 pm at the \$0.75/kWh signal.

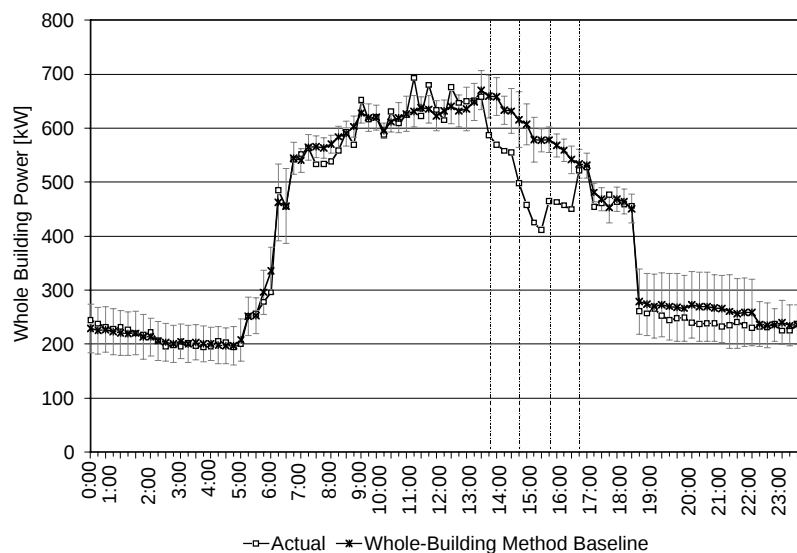


Figure 4-29. Roche – Combined Whole Building Power and Baseline (Whole-Building Method applied to all Three Buildings)

Figure 4-12 shows whole building power, fan power and savings by the component method. The whole building power was reduced by 70 kW due to the air handler shedding at Building A2 activated at the \$0.30/kWh signal. It was further reduced by 37 kW by Building SS and FS fan shedding at the \$0.75/kWh signal. The maximum shed of all three buildings was 107 kW. This site collected 5-minute interval data for the fan status. The status data verified that all the selected air handlers followed the price signal within five minutes after receiving the new price signal (1:00 pm, 2:00 pm, 3:00 pm, and 4:00 pm).

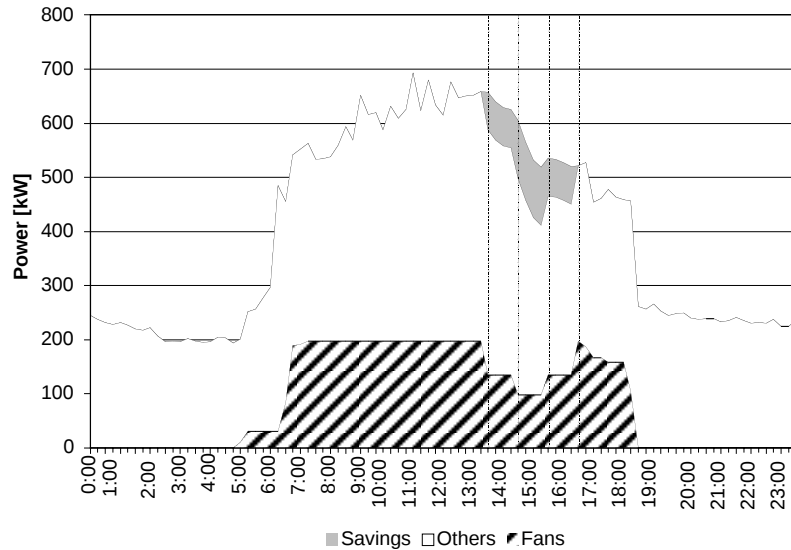


Figure 4-30. Roche – Whole Building, Fan Power and Savings (Component Method)

Non-Energy Results

Zone temperature and CO₂ concentration data was collected for Building A2. Figure 4-13 shows Building A2's average zone temperature on the test day (November 19th) and a reference day (November 18th). The zone temperature was around 74 °F after 11:00 am, and persisted until the end of the day's occupied period. There were no temperature or airflow complaints.

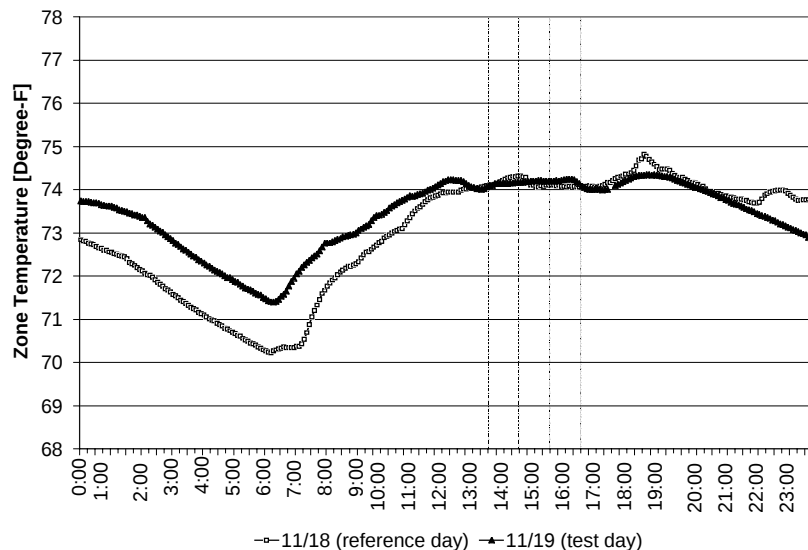


Figure 4-31. Roche – Building A2, Zone Temperature

Figure 4-14 shows Building A2's CO₂ concentrations on the test day (November 19th) and a reference day (November 18th). The Building's CO₂ level was quite different between the test day and the reference day, possible due to changes in the number of

occupants. Based on the data available, it is difficult to correlate the CO₂ changes during the shed period to the fan shed strategy. However, the CO₂ concentration immediately decreased at the end of the test (4:00 pm). This was caused by turning back on the air handlers, which were off during the DR test. During the test period, the CO₂ concentration was lower than 500 ppm¹¹, and there were no indoor air quality complaints.

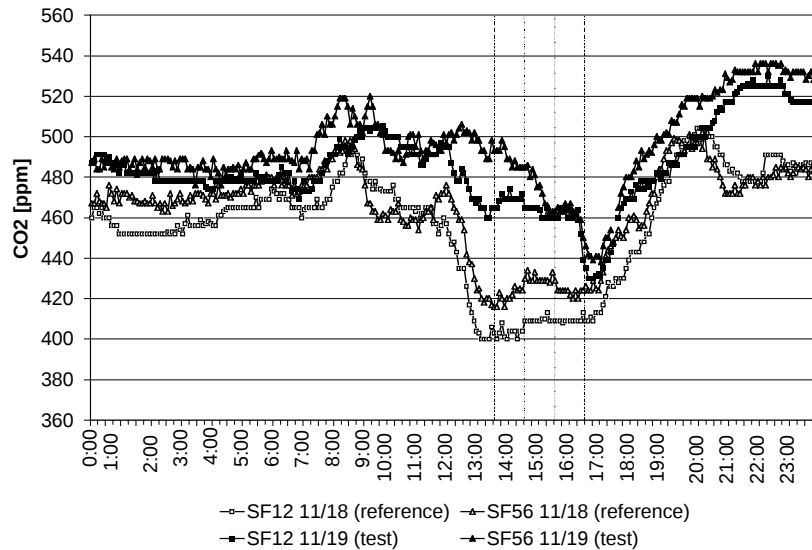


Figure 4-32. Roche – Building A2, CO₂ Concentration

UCSB

Saving Verification Methods

UCSB implemented the Auto-DR test at their Main Library, three inter-connected buildings (Library II, III and IV). Since the energy manager occasionally implemented some energy saving strategies at the buildings, the days he manually implemented energy saving strategies are eliminated from the baseline input data. Those manually controlled days are October 15th, 16th and 23rd. All the data used in the saving analysis were collected by the EIS. Prior to the test period, only whole building power and cooling power data were trended. For the component level evaluation, new data points were added to the EIS trend derived from the EMCS (See Table 3-7). Several zone temperatures were added to the data trend to evaluate the zone conditions. The supply fan and cooling power are considered as the controllable components.

Supply Fans

The VFD percent limit shed strategies were applied to Library II Supply Fan #1 through #5 and Library III Supply Fan #2. According to the average previous-day profile, the Library II supply fan demands were flat during afternoon. Though the OAT regression

¹¹ Comfort criteria, with respect to human bioeffluents (odor) are likely to be satisfied if the ventilation results in indoor CO₂ concentrations less than 700 ppm above the outdoor air concentration (ASHRAE 62-2001).

model method was tried for these fans, the actual fan load was higher than the maximum range of standard error of the model. Assuming the afternoon fan load was flat, the baseline demands for the Library II supply fans were estimated from the 15-minute demand prior to the shed. The Library III Supply Fan #2 demand was not constant and it didn't respond to the shed strategy, so the OAT regression model was used to estimate the Library III Supply Fan #2 demand.

Cooling Power

Though the Library has a central chiller plant, it is separated from the whole building power meter because the chiller plant supplies chilled water to a campus chilled water loop. The cooling energy [Btu/h] supplied to the Library is converted to electric demand [kW]¹². Baseline cooling power was estimated by OAT regression model.

Saving Results

Figure 4-15 shows the whole building power of the Library and the whole-building method baseline. Based on the whole-building method analysis, the Library achieved a maximum 109 kW (14%) demand savings at 2:15 pm and 2:45 pm, during the \$0.75/kWh period. The whole building power dropped by 48 kW at 1:00 pm as a result of the supply fan VFD shed strategy. The whole building power further dropped by 86 kW at 2:00 pm due to the deeper shed of supply fan VFD, static pressure limit, and cooling valve shutdown. The whole building power spiked at 3:00 pm. This spike was caused by the release of the cooling valve.

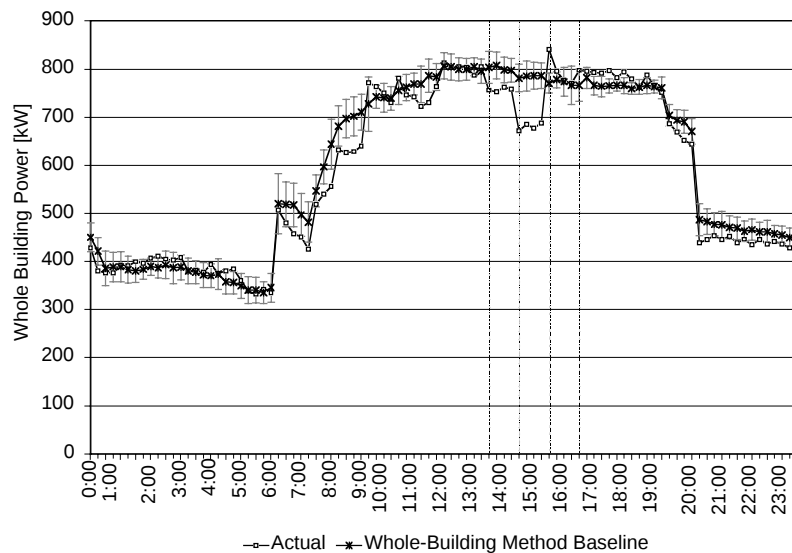


Figure 4-33. UCSB – Whole Building Power and Baseline (Whole-Building Method)

Table 4-7 shows the breakdown of whole building power and estimated savings by the component method. The maximum whole building power savings was 240 kW (10%) at

¹² Library cooling power [kW] = central plant power [kW] x Library cooling energy use [Btu/h] / total cooling energy produced [Btu/h]

3:45 pm, calculated using the component method. (See Appendix VII for OAT regression model baselines for each component)

Table 4-13. UCSB –Estimated Savings by Component (Component Method)

Time		from 12:45 to 13:00	13:00 to 13:15	13:15 to 13:30	13:30 to 13:45	13:45 to 14:00	14:00 to 14:15	14:15 to 14:30	14:30 to 14:45	14:45 to 15:00	15:00 to 15:15	15:15 to 15:30	15:30 to 15:45	15:45 to 16:00	16:00 to 16:15	16:15 to 16:30	16:30 to 16:45
Price signal	\$/kW	0.10			0.30				0.75				0.30				0.10
Actual	WBP	804	756	753	763	758	672	685	677	688	841	795	777	770	798	796	793
	Supply Fans	120	94	94	101	98	77	76	79	81	98	97	95	94	116	116	115
	Cooling Power	122	108	100	103	86	40	21	27	25	147	118	103	99	114	109	111
Baseline	WBP	802	794	803	802	813	789	814	800	807	822	797	791	788	778	793	776
	Supply Fans	120	119	118	124	122	121	120	122	125	122	121	119	118	116	116	115
	Cooling Power	120	121	127	119	117	113	106	106	100	104	95	94	92	94	106	94
Shed kW	WBP	-2	37	51	40	55	117	129	123	119	-19	1	15	17	-19	-3	-17
	Supply Fans	0	24	24	24	24	44	44	44	44	24	24	24	25	0	0	0
	Cooling Power	-2	13	27	16	31	73	85	80	75	-43	-23	-9	-7	-20	-3	-17
Shed %	WBP	0%	5%	6%	5%	7%	15%	16%	15%	15%	-2%	0%	2%	2%	-2%	0%	-2%
	Supply Fans	0%	20%	21%	19%	20%	36%	37%	36%	35%	20%	20%	20%	21%	0%	0%	0%
	Cooling Power	-2%	11%	21%	13%	26%	65%	80%	75%	75%	-42%	-24%	-10%	-8%	-21%	-3%	-18%

Figure 4-16 shows the whole building power, the cooling power and savings by the component method. The cooling demand was affected directly by the cooling valve shutdown strategy (\$0.75/kWh signal), and indirectly by the fan VFD reduction strategy (\$0.30/kWh and \$0.75/kWh signal). The cooling power dropped by 20 kW at the first \$0.30/kWh signal. The cooling power further dropped by 80 kW at the \$0.75/kWh signal. At the end of the \$0.75/kWh signal, the cooling power increased by 120 kW, more than 40 kW over the baseline. This was caused by the release of the cooling valve. Because the cooling valve control responded immediately after reception of 15-minute ahead price signal, the cooling power increased at 3:00 pm, while the price changed from \$0.75/kWh to \$0.30/kWh at 3:15 pm. This immediate response may result in higher energy costs if a demand spike occurs while the price is still high. Also, the demand spike caused by the release of shed strategies may result in higher demand charges.

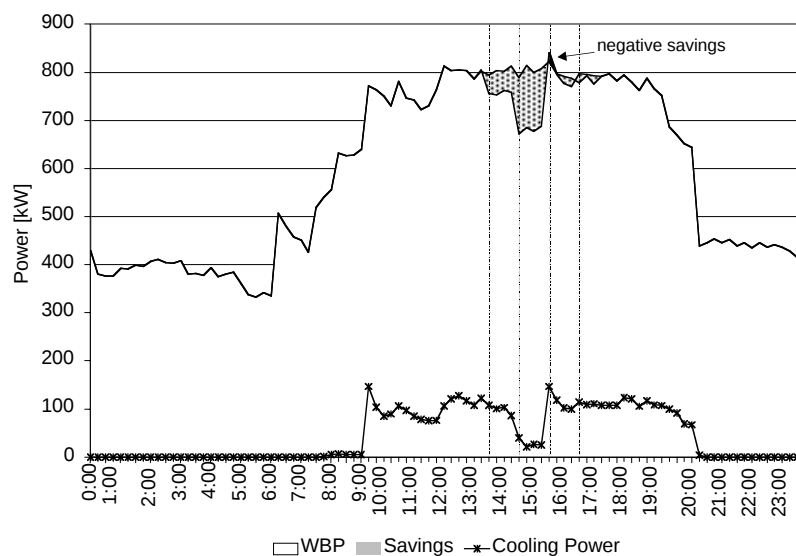


Figure 4-34. UCSB – Whole Building Power, Cooling Energy and Savings (Component Method)

Figure 4-17 shows the total fan power and baseline. The total fan demand dropped by 24 kW at 1:00 pm upon the receipt of the \$0.30/kWh signal which initiated the VFD percentage limit strategy. The total fan demand achieved 43 kW saving during the \$0.75/kWh period.

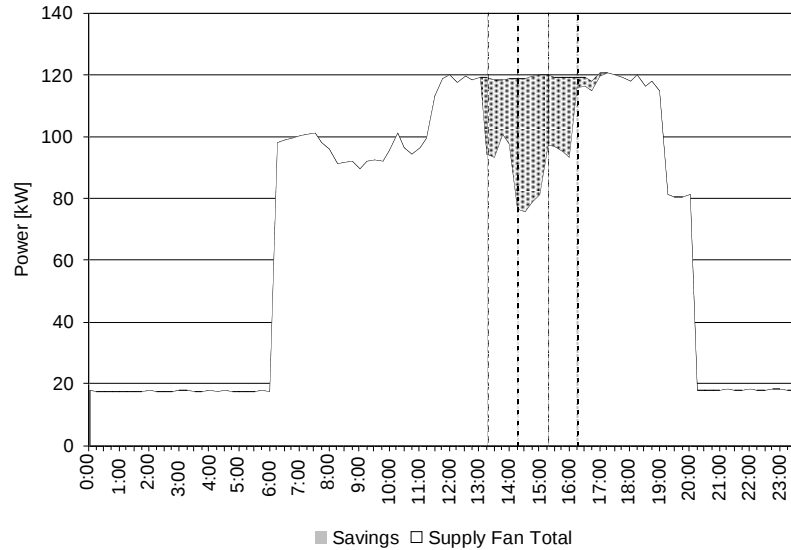


Figure 4-35. UCSB – Fan Power and Savings

Non-Energy Issues

Twenty-one zone temperatures were trended at the Library. Figure 4-18 shows the Library's average zone temperature on the test day and the reference day (average of previous 15 days). Zone temperatures of each building are given in Appendix VII. Although zone temperature increases were anticipated due to the shed strategy, average zone temperature changes were within 1 °F during the test. The building's has a large thermal mass, due to the building mass and books, so the zone temperature change might be moderated due to the thermal mass effect. There were no occupant complaints during the test.

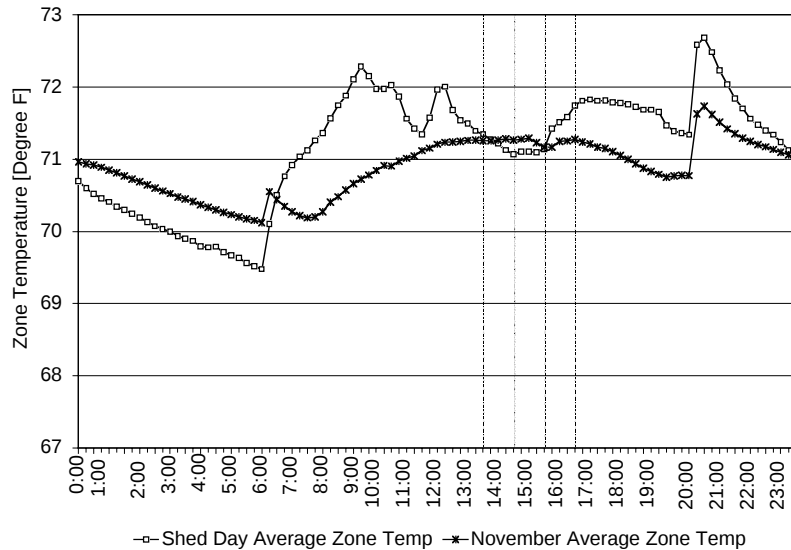


Figure 4-36. UCSB – Average Zone Temperature

Summary of Results

This section summarizes the results of the second test (November 19th). The demand savings are presented as shed kW, shed %, and shed kW per square foot (kW/ft²). Shed kW is calculated by subtracting the actual whole building power from its baseline demand. Shed percentage is defined as the percentage of savings in whole building power. Shed kW/ft² is the demand shed intensity, defined as the shed kW normalized by the building conditioned floor area.

Table 4-7 shows the demand savings for each 15-minute period which were derived using the whole-building method. Table 4-8 shows the results summary for all sites by the component method. The aggregated shed demand calculated using the component method was similar to the results calculated using the whole-building method.

Based on the whole-building method, the maximum aggregated shed demand of all the five sites was 519 kW. These savings were 11% of the whole building power and 0.30 W/ft². The maximum saving was achieved during the 2:15 pm to 2:30 pm interval, shortly after the \$0.75/kWh price signal was received. Comparing the sites to each other, GSA achieved the largest shed kW (274 kW), Roche achieved the largest shed % (29%), and Albertsons achieved the largest shed kW/ft² (0.75 kW/ft²) among the five sites.

Table 4-14. Summary of Estimated Savings of All Site (Whole-Building Method)

Time	from to	12:45 13:00	13:00 13:15	13:15 13:30	13:30 13:45	13:45 14:00	14:00 14:15	14:15 14:30	14:30 14:45	14:45 15:00	15:00 15:15	15:15 15:30	15:30 15:45	15:45 16:00	16:00 16:15	16:15 16:30	16:30 16:45
Price signal	\$/kW	0.10		0.30				0.75				0.30				0.10	
Albertsons	WBP kW	351	320	318	330	351	332	326	320	323	344	332	341	345	345	347	347
	Shed kW	-1	24	25	25	12	22	18	27	37	10	10	8	13	5	0	1
	WBP shed %	0%	7%	7%	7%	3%	6%	5%	8%	10%	3%	3%	2%	4%	2%	0%	0%
	Shed W/spft	-0.02	0.48	0.51	0.51	0.23	0.44	0.36	0.54	0.75	0.21	0.20	0.16	0.26	0.11	0.00	0.01
B of A	WBP kW	720	726	729	717	752	751	723	746	742	731	726	718	721	706	682	664
	Shed kW	-7	-15	-13	-2	-31	-28	-8	-33	-31	-17	-15	-6	-18	-13	6	10
	WBP shed %	-1%	-2%	-2%	0%	-4%	-4%	-1%	-5%	-4%	-2%	-2%	-1%	-3%	-2%	1%	1%
	Shed W/spft	-0.03	-0.07	-0.06	-0.01	-0.15	-0.13	-0.04	-0.16	-0.14	-0.08	-0.07	-0.03	-0.08	-0.06	0.03	0.05
GSA	WBP kW	2248	2168	2093	2085	2091	2098	2086	2109	2178	2232	2184	2126	2085	2123	2178	2077
	Shed kW	141	195	264	271	274	257	259	219	195	141	217	246	223	176	48	83
	WBP shed %	6%	8%	11%	12%	12%	11%	11%	9%	8%	6%	9%	10%	10%	8%	2%	4%
	Shed W/spft	0.14	0.20	0.27	0.28	0.28	0.26	0.26	0.22	0.20	0.14	0.22	0.25	0.23	0.18	0.05	0.08
Roche	WBP kW	658	587	569	558	555	498	458	425	412	465	463	457	450	522	527	454
	Shed kW	12	72	89	75	77	118	150	154	165	113	105	102	92	12	4	27
	WBP shed %	2%	11%	14%	12%	12%	19%	25%	27%	29%	20%	19%	18%	17%	2%	1%	6%
	Shed W/spft	0.06	0.38	0.47	0.39	0.40	0.61	0.78	0.80	0.86	0.59	0.55	0.53	0.48	0.06	0.02	0.14
UCSB	WBP kW	804	756	753	763	758	672	685	677	688	841	795	777	770	798	796	793
	Shed kW	-9	47	55	35	40	109	100	109	98	-70	-17	-3	-4	-32	-13	-27
	WBP shed %	-1%	6%	7%	4%	5%	14%	13%	14%	12%	-9%	-2%	0%	-1%	-4%	-2%	-4%
	Shed W/spft	-0.03	0.16	0.19	0.12	0.14	0.38	0.35	0.38	0.34	-0.24	-0.06	-0.01	-0.02	-0.11	-0.05	-0.09
Total	WBP kW	4781	4557	4462	4452	4507	4351	4278	4276	4342	4612	4499	4418	4371	4494	4528	4334
	Shed kW	136	323	421	405	371	477	519	476	465	178	301	346	305	149	44	94
	WBP shed %	3%	7%	9%	8%	8%	10%	11%	10%	10%	4%	6%	7%	7%	3%	1%	2%
	Shed W/spft	0.08	0.19	0.24	0.24	0.22	0.28	0.30	0.28	0.27	0.10	0.17	0.20	0.18	0.09	0.03	0.05

WBP: whole building power
Shed: demand saving (= baseline demand – actual demand)
WBP shed %: demand saving ratio in whole building power
Shed W/ft²: demand saving per square feet

Table 4-15. Summary of Estimated Savings of All Site (Component Method)

Time	from to	12:45 13:00	13:00 13:15	13:15 13:30	13:30 13:45	13:45 14:00	14:00 14:15	14:15 14:30	14:30 14:45	14:45 15:00	15:00 15:15	15:15 15:30	15:30 15:45	15:45 16:00	16:00 16:15	16:15 16:30	16:30 16:45
Price signal	\$/kW	0.10		0.30				0.75				0.30				0.10	
Albertsons	Shed kW	0	22	26	26	26	39	41	41	41	30	26	26	26	9	-1	-1
	WBP shed %	0%	6%	8%	7%	7%	10%	11%	11%	11%	8%	7%	7%	7%	3%	0%	0%
	Shed W/spft	0.00	0.44	0.52	0.52	0.52	0.78	0.82	0.83	0.83	0.60	0.52	0.52	0.52	0.18	-0.02	-0.01
B of A	Shed kW	0	0	6	11	7	1	8	8	0	0	9	12	0	0	0	0
	WBP shed %	0%	0%	1%	1%	1%	0%	1%	1%	0%	0%	1%	2%	0%	0%	0%	0%
	Shed W/spft	0.00	0.00	0.03	0.05	0.03	0.00	0.04	0.04	0.00	0.00	0.04	0.06	0.00	0.00	0.00	0.00
GSA	Shed kW	75	164	185	161	204	165	192	156	146	149	238	240	223	109	40	54
	WBP shed %	3%	7%	8%	7%	9%	7%	8%	7%	6%	6%	10%	10%	10%	5%	2%	3%
	Shed W/spft	0.08	0.17	0.19	0.16	0.21	0.17	0.20	0.16	0.15	0.15	0.24	0.25	0.23	0.11	0.04	0.05
Roche	Shed kW	0	70	70	70	70	107	107	107	107	70	70	70	70	0	0	0
	WBP shed %	0%	11%	11%	11%	11%	18%	19%	20%	21%	13%	13%	13%	14%	0%	0%	0%
	Shed W/spft	0.00	0.37	0.37	0.37	0.37	0.56	0.56	0.56	0.56	0.37	0.37	0.37	0.37	0.00	0.00	0.00
UCSB	Shed kW	-2	37	51	40	55	117	129	123	119	-19	1	15	17	-19	-3	-17
	WBP shed %	0%	5%	6%	5%	7%	15%	16%	15%	15%	-2%	0%	2%	2%	-2%	0%	-2%
	Shed W/spft	-0.01	0.13	0.18	0.14	0.19	0.40	0.45	0.43	0.41	-0.07	0.01	0.05	0.06	-0.07	-0.01	-0.06
Total	Shed kW	73	294	338	307	362	429	477	436	414	231	344	363	337	98	36	36
	WBP shed %	2%	6%	7%	6%	7%	9%	10%	9%	9%	5%	7%	8%	7%	2%	1%	1%
	Shed W/spft	0.04	0.17	0.20	0.18	0.21	0.25	0.28	0.25	0.24	0.13	0.20	0.21	0.20	0.06	0.02	0.02

Impact of Early Implementation and End of Shed Strategies

As a general trend, all sites except B of A responded approximately 15 minutes earlier than when the price signal took effect (B of A's demand shed was too small to identify the result). For example, Albertsons reduced the demand a few minutes after 1:00 pm while the price signal rose at 1:15 pm. The system also responded 15 minutes earlier when the price signal fell. The price signal is designed to inform 15-minute ahead price

(for example, the signal received at 1:00 pm tells the future price of 1:15 pm). This was in order to give the systems preparation time to change their operation before the price change. The result indicates these sites could respond to the signal and changed the operation within a few minutes. The issue is that the shed strategies were disabled as soon as the system received the lower price signal, and therefore the demand increased 15 minutes before the high price period ended. This may cause higher electricity charges despite of the demand response effort.

Demand Shed Related to Price Signal

Figure 4-19 and Figure 4-20 show shed kW and shed W/ft² of each site averaged by each 1-hour price signal level. The largest shed was at GSA, maintaining over 150 kW during the entire shed period. The greatest demand shed intensity was at Albertsons, with 0.4 to 0.7 W/ft² during the shed period. All but the B of A site shed at least 0.15 W/ft².

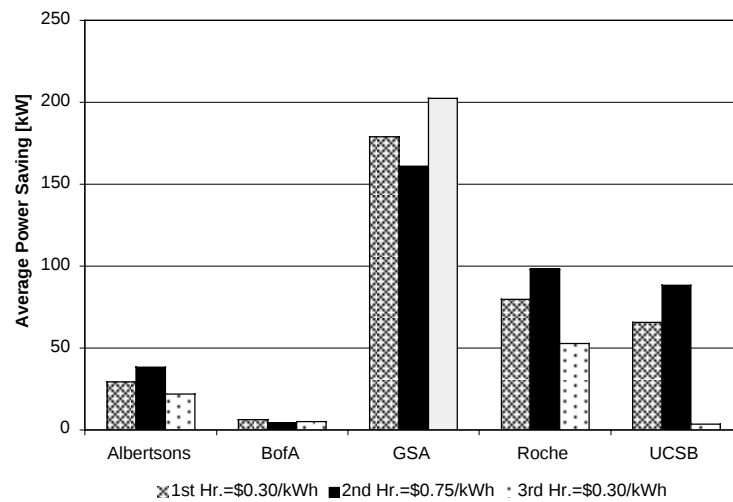


Figure 4-37. Average Shed kW by Price Signal Level (Component Method)


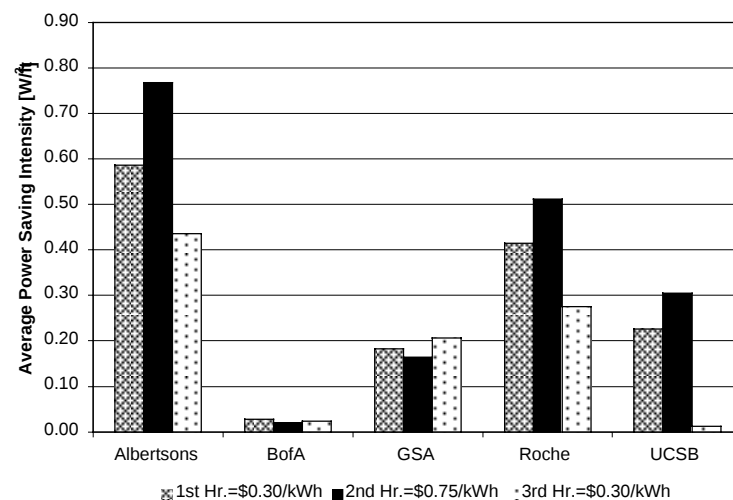


Figure 4-38. Average Shed W/ft² by Price Signal Level (Component Method)

Whole Building Power and Aggregated Savings

Figure 4-21 shows the actual whole building power of all five sites and aggregated demand savings, calculated by the component method. The total demand reduction began at 1:00 pm (15 minutes before \$0.30/kWh period) and were further reduced at 2:00 pm (15 minutes before \$0.75/kWh). The systems returned to the same shed strategies used at the previous \$0.30/kWh level at 3:00 pm. The systems returned to normal operation at 4:00 pm.

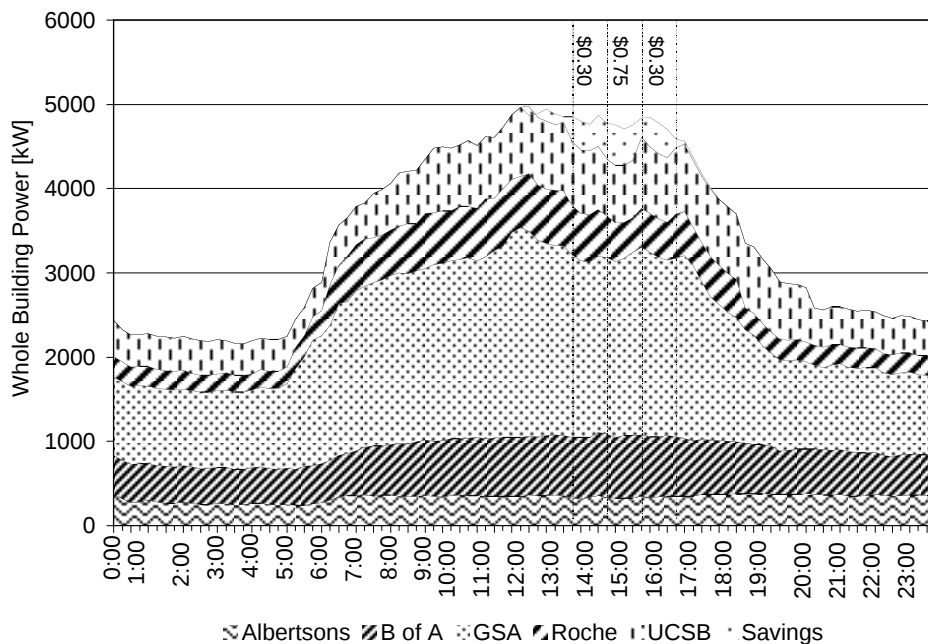

* Savings are calculated by the component method.

Figure 4-39. Summary of All Sites

Demand saving by the whole-building method and the component method were similar, though the similarities vary by site. Figure 4-22 shows a comparison of the whole-building method and the component method calculated shed kW for each site. Roche's whole-building method savings is higher than that calculated by the component method, because the whole-building baseline was affected by an operational change of one building in the site. The overall results suggest that the weather normalized whole-building profiles provide reasonable estimates. Whole building data are much easier to collect and are more readily available than end-use and component data. Previous work has shown that methods that do not account for weather have significant bias for large commercial buildings (KEMA-Xenergy, 2003). We did not compare the weather-normalized whole-building analysis method with the flat 10-day average baseline used in many DR evaluations.

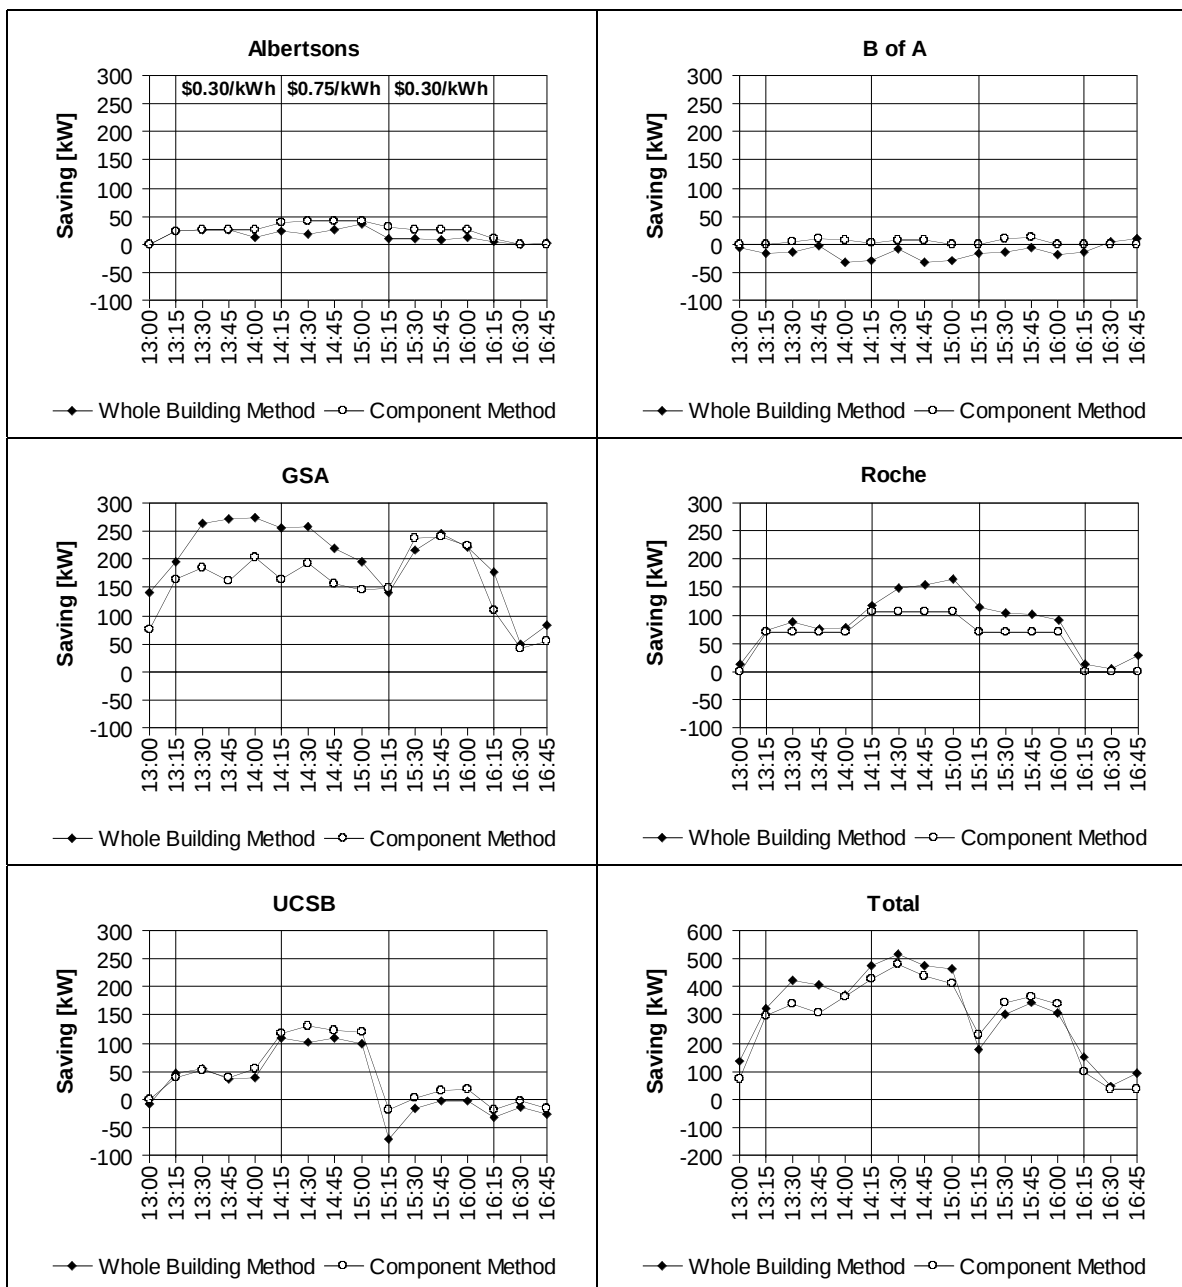


Figure 4-40. Saving Estimates by Whole-Building Method and Component Method

5. Discussion: Organizational and Technological Issues

This section provides a discussion of the key lessons learned from this Auto-DR test. They have been organized into four main topic areas:

- Implementation and organizational challenges in deploying Auto-DR technology
- Technical challenges at each site
- Key lessons learned concerning unique attributes of the systems at each site that further our understanding of the diversity of technology infrastructures among these facilities
- State-of-the-art technology and desirable features for future Auto-DR systems

5-1 Implementation and Organizational Challenges

There are a variety of implementation and organizational challenges that had to be addressed during the execution of this project. After the research team defined the high-level objectives of the project, these objectives were conveyed to the key decision makers at each site as part of the recruitment effort. Facility and energy managers who were in the position to understand and approve of a project of this magnitude tended to be spread thin between important management responsibilities. As these managers delegated project responsibilities to their staffs, progress often stalled. The tasks necessary to implement Auto-DR systems at each site cut across several areas of expertise and authority. To implement Auto-DR systems as designed in the November 2003 test, most sites required input from facility managers, HVAC experts, EMCS programmers, Web services programmers and IT managers. Defining, designing, coordinating and implementing the details of each site's system often required substantial effort from the facility staff and the research team.

Web services is a relatively new technology, and most of the development teams had not used it prior to the test. But because of the simplicity of this technology, lack of experience was not a major impediment to success for any of the Auto-DR test development teams. However, even though learning Web services is simple for most programmers in the IT community, development of this technology requires programming skills beyond the ability of most EMCS "programmers". Within most EMCS field organizations, it is uncommon for EMCS programmers to broaden their skills to include IT level programming expertise.

Within each Auto-DR test team, an IT professional programmed the Web services client and business logic, while an EMCS professional programmed or configured the shed logic. While this approach ultimately produced successful results, the added organizational complexity made scoping, development, testing and project management more difficult than if all of the required software changes could be conducted by one person or organization.

5-2 Overview of Technical Challenges

There were a number of specific technical challenges in conducting this test. This section describes four key issues: software compatibility, time zones, IT and EMCS failures, and hardware issues.

Software Compatibility

Platform independence is one of the key attributes of well-designed Web services. However, platform dependencies are not always easy to spot. In the Auto-DR test, there were compatibility issues associated with the server software that was developed within the Microsoft “.Net ” environment and two of the clients that were developed in Java or Delphi environments. These problems were not caused by inherent platform incompatibilities per se, but by the indiscriminate use of a text format rather than another format more commonly used to display data. The problems were resolved by modifying the Web services server to use a format that is more commonly used for data.

Time zones

The developers, users, price server and polling clients were distributed across 3 time zones in continental North America. Thus, a common universal time zone was required for use by all parties. Coordinated Universal Time (***UTC***) was selected as the standard. All parties used UTC in the lowest software levels, but most users preferred to see their local time zone when interacting with the system on a HMI. In the test, programmers often converted UTC to local time to improve the usability of time related data (e.g., 20:01 UTC was converted to 12:01 pm PST). But since this work was done without regard for users in other time zones, some time indication problems occurred with the viewing and logging at various sites. These problems were resolved by adopting a two-pronged approach; UTC was used for low level software and PST was used where time data would be viewed or logged.

IT Failures

In several cases, portions of the IT infrastructure failed for various reasons. At Albertsons, the polling client software stopped polling the price server inexplicitly just prior to the start of the test window. It was restored minutes later after system administrators were alerted by telephone. An upgrade of the UCSB EIS software several weeks before the test left the gateway software out of synch. Since the remote control functionality was not functional in time for the test, a remotely controlled IP Relay was added to provide the control interface to the EMCS. During the first test window, B of A's monitored building was not commanded into shed mode for unknown reasons.

EMCS Failures

In the first test window, two sites failed to properly enter shed mode due to failures in the EMCSs. At GSA, an I/O controller locked up and failed to initiate a shed mode. At UCSB, the first test was marred by some EMCS points being “fixed” in manual mode, unable to automatically respond to remote commands to enter certain shed strategies.

Hardware Issues

During the installation and early testing phase of the project, Albertsons management reported that the chicken cooker lost power during the shed test of the freezer case lights. Further research of the electric trend logs showed an intermittent load profile that was consistent with that of an electric cooker on the same circuit as the freezer case lights. The cooker profile appeared several times per day starting several months prior. Albertsons management verified that the chicken cooker was installed earlier that summer on the date that the mysterious load profile was first observed. Rather than perform costly revisions to high voltage wiring, the problem was resolved by modifying the EMCS software so as to remove the chicken cooker and freezer case lights from the shed strategy.

5-3 Lessons from each Site

This section identifies lessons learned based on the unique attributes of each participating facility. Issues related to the controls and communications infrastructures and shed strategies are discussed for each system.

Albertsons System Overview

The Albertsons building telemetry data system is split between two systems. The EMCS (excluding electric monitoring) is accessed via dial-up modem. EIS data are available via any Web browser through the Engage/eLution site. The lack of integrated systems makes energy management and analysis more difficult for facilities staff.

Albertsons' enterprise networks and control networks are tightly integrated. Albertsons' corporate WAN is used to communicate between the business logic /polling client and the on-site IP I/O device. This enterprise network is also used for mission critical **point of sale** data communications within the Albertsons organization. The fact that the energy data are shared and communicated over the mission critical enterprise network indicates a high level of trust and collaboration between Albertsons core business managers and Albertsons energy managers.

Albertsons Shed Strategy Impacts

The shed strategy was not objectionable to the store managers or patrons. Although the transition between 100% overhead lighting to 50% was noticeable, there were no complaints. The reduction of overhead light appeared to make the other light sources in the store, such as case lights, seem more intense. There is no evidence that the freezer doors fogged up during the shed, even though the anti-sweat heaters were switched to night mode. If the transition of overhead lights to 50% were gradual (e.g., through use of dimmable ballasts) the entire shed would probably not be noticeable.

Bank of America System Overview

The enterprise networks and control networks are tightly integrated. B of A's corporate WAN is used to communicate across the country to the on-site gateway. This network is also used for mission critical financial data communications within the B of A organization. Like Albertsons, the fact that the energy data are shared and communicated over the mission critical enterprise network indicates a high level of trust and collaboration between B of A's core business managers and B of A's energy managers. The use of highly secure and reliable hardware VPN routers and the use of a co-location (co-lo) to host the polling client and business logic computers are indications that system availability and security are high priorities to B of A.

When the WebGen system takes action to reduce energy at its connected sites, it uses a centralized control paradigm. While demand response systems are inherently centralized (signals to shed loads are generated in a one-to-many relationship), centralized control for day-to-day operation is less common.

In most control system markets (commercial buildings, industrial controls, etc.) there has been a trend for several decades toward distributed or de-centralized control. In distributed control architectures, the control logic is physically moved as close to the sensors and final control elements (relays, valves, etc.) as possible. Distributed control systems have traditionally been less costly, more flexible and more robust than centralized systems. However, in the IT community there has been a movement toward hosted solutions, application service providers (ASPs) and other centralized solutions. Ubiquitous Internet connectivity and advances in IT equipment have made these systems less costly, more flexible and more robust for certain applications.

The WebGen system alternates between centralized and decentralized paradigms on cycles of about twenty minutes. One minute a fan system maintains a setpoint entered by onsite building operators. In the next minute, a neural network algorithm defines the setpoint from over 3000 miles away.

B of A Shed Strategy Impacts

With regard to the shed strategy employed at this site, there is no evidence that the modest reduction in duct static pressure for durations of twenty minutes caused any negative comfort effects to the occupants during the test. However, as shown in the measured data, the extent of the electric demand shed was also negligible.

If this strategy were expanded to produce significant electric sheds, this method may pose some fundamental drawbacks. In VAV systems, when duct static pressure is reduced below the minimum required by the terminal boxes, airflow is reduced in the zones. But the reduction is not shared evenly between all the boxes. The zones of greatest demand are the ones that are starved for air most immediately and most severely. In the B of A building tested, the potential problem is exacerbated by the lack of sensors. Fan airflow is not measured and only nine "representative" zone temperature sensors are available for

the entire 211,000 ft² building. There are not enough sensors to estimate the effects that reductions in airflow would have on occupants.

GSA System Overview

The enterprise and EMCS infrastructures used to enable Auto-DR at this site are linked together in a long series of serial components and communication links. The prototype system was assembled using spare parts at a low cost. With so many links, it is not surprising that there was a communication failure due to an unexplained equipment lock-up during the first test. To make the system more robust, a review of the components and architecture should be conducted.

GSA Shed Strategy Impacts

The second test was quite successful as communications were functional from end-to-end. The shed strategy produced an electric shed about as large as the other four sites combined. Because the temperature setpoint reset was at the zone level, comfort for each occupant could be maintained within the revised, relaxed constraints. To implement this strategy, it was necessary to revise the software parameters and some logic in each of the 1,050 VAV terminal box controllers. For most EMCS systems, the labor required to make these revisions would be substantial (one to three weeks). In this building, the process had been somewhat automated by previous system upgrades. This allowed EMCS reprogramming for Auto-DR to be conducted in about three hours.

Roche System Overview

The Tridium Niagara framework ties together the various EMCS protocols in a seamless fashion. The Web interface provides operators complete monitoring and control capability from anywhere on the campus. It was relatively straightforward to interface the Auto-DR polling client and associated business logic to the system. The most challenging part of the project was setting up an “extra” computer outside of the Roche firewall in the DMZ. This design allowed secure communications between the price server on the public Internet, the polling client on the DMZ computer and the Tridium computer inside the corporate network.

UCSB System Overview

Remote monitoring and control of the EMCS and EIS data were available over the Internet prior to the Auto-DR test. However, at the time of the test, remote control of the EMCS was not available. The software gateway between the enterprise network and the EMCS network lost remote-control functionality during an “upgrade” of the Silicon Energy server software. To meet the schedule of the Auto-DR test, in lieu of a gateway, an IP I/O controller was added to allow the Auto-DR business logic to initiate remote-control functions including shed initiation.

UCSB Shed Strategy Impacts

The shed strategy proved to be very effective. The books and other mass in the Library buildings act as a thermal “flywheel” to help keep the space comfortable during the shed periods. In addition, the sheds reduced airflow without shutting off fans completely. The Santa Barbara’s coastal climate helped provide a temperate airflow even though the cooling valves were closed to save chiller energy.

5-4 State of the Art Auto-DR Systems

This section describes the attributes of state-of-art Auto-DR systems based on technologies that were either demonstrated or otherwise available at the time of the November 2003 Auto-DR test. A truly state-of-the-art Auto-DR system would use the “best of the best” components, systems and strategies from end to end. Such a system would be designed from scratch to meet a very specific set of requirements driven by business cases or other factors. The “best” system would meet or exceed the requirements at the lowest installed cost.

Flexible Designs for the Future

Today’s state-of-the-art Auto-DR technology could be applied in many different ways, depending on the scenarios and use cases that they are designed to satisfy. As the scenarios, use cases, and driving forces behind Auto-DR become better defined, systems will be designed and deployed accordingly. Since these design criteria are likely to remain in flux, Auto-DR system flexibility and future-proofing are a very high priorities.

Features

Customers should have numerous options about how they can participate in Auto-DR programs. For any given motivating force that drives customers to consider Auto-DR (e.g., price), each will have different circumstances under which they will want to participate. Customer flexibility must be built into any state-of-the-art Auto-DR system. They should have the ability to use custom business logic that is applicable to their own operations. Some may choose to allow remote real-time sheds, while others may want some advanced warning via pager or cell phone and the ability to opt out, if desired. Other important features in state-of-the-art Auto-DR systems are two-way communications, real-time monitoring, high security, and high system availability.

Leveraging Trends in Technology

The lower the installed cost of state-of-the-art Auto-DR systems, the sooner they will find their way into mainstream use. One of the most important ways to keep costs low is to leverage existing trends in technology. The use of existing IT technology in Auto-DR systems wherever possible is an important way to keep costs low. The public Internet and private corporate LAN/WANs are ideal platforms for Auto-DR controls and communications due to their ubiquity, especially in large commercial buildings. In addition, the performance of IT equipment (e.g., routers, firewalls, etc.) continues to improve and equipment prices continue to drop. Auto-DR systems based on standard IT platforms will also tend to be more scalable and secure than special purpose systems developed specifically for Auto-DR.

Enterprise, EMCS and EIS Integration

Another way to obtain high system performance and keep the system costs low is through increased integration within the building. Since energy data from EISs are simply another type of measured data, EISs and EMCSs should share the same networks so as to maximize system performance and functionality and minimize cost. In addition to eliminating a redundant EIS network, other aspects of the system are also unified through this approach. Use of an integrated EMCS/EIS database and associated archiving and visualization tools increases user functionality while reducing cost. The ability to change setpoints for HVAC equipment and observe and analyze the effect on electricity use from the same HMI is an important enhancement to both the EMCS and EIS.

State-of-the-art Auto-DR systems should have tight integration between the EMCS/EIS network and the enterprise networks within buildings. This strategy maximizes the performance, distribution and availability of the building data, while minimizing the installation and maintenance costs. In systems in which EMCSs and EISs are highly integrated with enterprise networks and the Internet, managing the flow of information is greatly simplified.

Once remote telemetry to EMCS and EIS is connected via enterprise networks, additional functionalities are enabled. While the need for localized field maintenance remains, geographic limitations on the distribution of building information virtually disappear. Reliable, distributed information about the operation of EMCS/EISs can actually reduce maintenance costs. By remotely determining operating conditions, equipment run-time, and error codes, maintenance workers can be dispatched in a more efficient fashion. In addition, once the integrated enterprise EMCS/EIS infrastructure is in place, fault detection and diagnostic (FDD) programs and other software tools can further reduce ongoing operational costs. Other remote telemetry applications include energy management, energy forecasting, aggregation, access control and regulatory record keeping.

In a state-of-the-art Auto-DR system, remote telemetry to the EMCS/EIS should be provided via password protected Web servers. Various levels of access should be provided for different types of users. Maintenance workers and accountants may only need monitoring access, while facility engineers may require complete control over setpoints and programming logic.

The network architecture of today's state-of-the-art Auto-DR system would tend to be flatter than that for most of the sites in the November 2003 test. A flat architecture is one in which there are a minimum number of layers of control network protocols between the front-end HMI and final control and monitoring elements such as actuators and sensors. The most robust and least costly systems should have no more than one enterprise network protocol and one control network protocol.

Open Standards

For flexibility and future-proofing as well as the option to choose "best of breed" products, state-of-the-art Auto-DR systems should use open standards wherever possible. Unlike proprietary systems, truly open systems are *interoperable*. In other words, a

device from one company (e.g., Cisco) will easily and naturally reside on a network with products from other companies (e.g., Nortel). Most products in enterprise networks are interoperable. They all communicate using the TCP/IP protocol and can be set up and managed using common network management tools.

TCP/IP is clearly the worldwide protocol of choice for LAN/WANs, the Internet and enterprise networks. There are several open standard control network protocols including BACnet (ASHRAE Standard 135-2001) and LonTalk (ANSI/EIA/CEA 709.1). Although the use of the meta-language XML is becoming a standard framework for communicating over enterprise networks and the Internet, XML alone does not define data formats that can be used to convey measured building or energy data. Organizations such as **oBIX**, BACnet XML and OPC XML are developing standards of this type.

Shed Strategies

State-of-the-art shed strategies should be designed to minimize discomfort, inconvenience, and loss of revenue for the participating sites. Shed strategies should be devised by customers to meet their needs. In general, shed strategies that use fine granularity closed-loop control are less likely to negatively impact building occupants for a given demand shed. Ideally, sheds would vary commensurately with a variable shed signal. Transitions should be fast enough to be effective, but slow enough so that transitions are not noticed by the building occupants.

In addition to HVAC control strategies, lighting and other switch-able loads should be considered for sheds as well. By increasing the Auto-DR controlled load to the point where it approaches the whole building load, each load type (e.g., HVAC, lighting, etc.) would need to shed a smaller amount in order to achieve a given shed target for the whole building.

6. Summary and Future Research Topics

General Findings and Research Issues

In general, this study has shown that Auto-DR is technically feasible, although considerable effort from the research team was needed to guide the development of this technology at several of the case study sites. This study has obtained detailed information concerning numerous topics regarding DR and Auto-DR. We have made considerable progress in characterizing DR controls and communications systems for large facilities and in evaluating the specific DR shed strategies. We've also made extensive progress in developing a preliminary conceptual design for a communications infrastructure using XML and Web services. The technology presented here offers a glimpse of what may be possible for a large-scale deployment effort. We have also made progress in developing methods to measure and quantify the DR shed. The whole building and component level analysis methods showed good agreement with each other, allowing for flexibility in the level of monitoring required to quantify the shed impacts.

It is important to outline key outstanding issues that should be addressed in future research. One key question is how these strategies and technologies would perform in warm weather that is more typical of DR events. There were no complaints recorded from these DR strategies. However, the buildings were not aggressively "pushed" to shed large amounts of power. Facility managers may require payment for larger interventions and tests. A related issue is how both the communications and control technology infrastructure and the DR strategies can be used in today's DR programs in California.

While the DR strategies used at each site were developed on a custom basis, there is a need to gain more knowledge with how these strategies can be generalized. This knowledge will require market assessment of the capabilities of controls and communications systems, including remote connectivity and linkages between zones and central systems. As mentioned, there may be other strategies to help maximize DR and minimize the loss of services. A broader analysis of DR strategies is needed.

Perhaps the largest outstanding issue not addressed in this study is the costs and benefits of bringing Auto-DR functionality to typical existing buildings and industrial facilities. Evaluating such costs will be highly dependent on a good characterization of communications and control systems in today's facilities. Further work on characterizing the costs for the existing systems is needed to help understand the total costs and benefits of such technology. The benefits include energy savings, and there is a need to keep energy efficiency on the forefront of this area's research efforts to ensure the technology has dual use and is used in an optimal manner. Assessing the benefits of DR or Auto-DR will require a careful analysis of DR programs and developing scenarios that explore how large facilities might participate in these programs. These scenarios should consider real-time pricing, critical peak pricing, demand bidding, and other DR tariffs and programs. The economic perspectives can consider both the end-use customer and the societal costs and benefits of DR and Auto-DR.

Need for Technical Resources

As a technology-research oriented project, the research team developed new knowledge about DR that is not widely available. DR is a complex concept. Facility operators need to understand DR economics, controls, communications, energy measurement techniques, and the relation between changes in operation and electric demand. Such understanding may involve numerous people at large facilities. Facility managers need good knowledge of controls, and current levels of outsourcing of control services complicate understanding of control strategies and system capabilities.

Examples of information needed to facilitate DR in general include guides on DR strategies and measurement and analysis tools and techniques to predict and measure DR. These tools should include building operational information and economic analysis tools. DR functional and commissioning tests are needed to guide facility managers through the process of identifying and testing DR strategies. Such techniques should ideally be linked to retro-commissioning guides that link energy savings and control optimization to DR.

One key finding of our research was that the controls and communications systems are complex. Limited information at each site was available to characterize the linkages and technology infrastructure. Facility managers need improved facility documentation as the industry attempts to push today's often broken control systems into advanced applications like DR. If we achieve success in understanding how to specify and describe these controls and communications infrastructures, it may prove useful to require such improved documentation in building codes of the future. Similarly, future work should explore requiring circuiting of non-critical end-uses and control strategies in new buildings to facilitate DR in new buildings through the building code process.

Organizational Findings and Future Directions

Providing energy is a complex endeavor. Making sure that every customer has secure, reliable and safe power is a tremendous accomplishment of modern civilization. The provision of such power has relied on a paradigm that is changing. Today, good energy services imply not merely providing safe, uninterruptible power, but supporting demand responsiveness. The present energy industry does support these goals, although there is universal acknowledgement among the five Auto-DR participants that these programs are necessary. These Lead Users cannot provide the leadership to develop DR technology on their own, although they are excellent partners for continuing research.

There are few industries and institutions that do not have Lead Users. In the case of Demand Response, the Lead Users may not identify themselves. One reason for this is that Demand Response programs are not mature in California. Facility managers value safety and security of information over demand responsiveness. It will be important for the researchers to target clusters of lead users and educate them about the long term likelihood of demand response programs and guide mid-level managers through their cumbersome bureaucracies towards participation in these programs.

Future related research will need to evaluate the costs and benefits of new demand response programs and tariffs in California. Such information should be provided to the existing Lead Users to ensure that they become part of the extended demand response research team. They should be encouraged to share some of the financial burden to participate in DR, but their costs should remain low until DR has been economically proven. They are unlikely to have continued interest in this work unless more lucrative Demand Response programs develop. The lack of any mature Demand Response programs is an impediment to the research. Another impediment is that all five Lead Users purchase energy from Direct Access suppliers.

Understanding and facilitating DR requires a long-term perspective, and technical assistance will be needed for large commercial and industrial facilities. One promising avenue to deliver technical services is to partner with knowledgeable vendors and controls suppliers. Facility managers and owners who fully understand their outsourced technologies are rare, but an educated vendor can provide information and facilitate change more easily. Further, an educated vendor can supply the essential information on costs that the midlevel managers require.

Technology Issues

There are several key issues about future Auto-DR technology.

Scalability - While the Auto-DR infrastructure and associated components performed exceptionally in this test, additional technical issues associated with a full-scale Auto-DR deployment are expected to be significant. Additional research is required to address issues associated with deploying a real system in thousands or tens of thousands of sites. Scalable designs must consider installation and configuration methods, network management, version control and other long-term maintenance issues that have not been considered in the scope of this test.

Security – What are the worst-case scenarios that could occur if an Auto-DR system were breached by hackers? What security design and process measures should be considered in a deployable Auto-DR system?

Use Cases - What are the likely use cases for which a deployable Auto-DR system should be designed? A system designed primarily for emergency load relief may be substantially different than a system designed to minimize operational costs on an ongoing basis. What are the shed timing requirements of various use cases and what are the timing characteristics of various Auto-DR systems and strategies?

Candidate Sites - What are the characteristics of a facility that make it a good candidate for Auto-DR? What are the characteristics of facility management and engineering teams that will help assure that their sites would succeed in Auto-DR programs? What are the most practical ways to add Auto-DR to existing commercial buildings that lack existing remote telemetry to HVAC systems?

Intelligent Centralized Orchestration - If thousands of Auto-DR sites across the state were “on-line” how should they be orchestrated? From a centralized operations center, what criteria would determine which sites or groups of sites should be commanded to shed? To what degree could centralized automation act as a “traffic cop” to help the capacity meet the demand in each region? Is it possible to create flexible groupings customized to meet the needs of any given shed event? What would be the characteristics of such a system?

Technology Trends - As building systems including EMCS, EIS, security, fire and telephones are all moving toward inclusion into an enlarged more integrated definition of the “enterprise network”, the technologies used in the enterprise are shifting as well. How will these trends affect the future of Auto-DR? How will wireless devices be used in Auto-DR? How will the eventual implantation of the next Internet protocol, *IPv6* affect Auto-DR?

7. References

- California Energy Commission. 2003. "2003 Integrated Energy Policy Report. Docket #02-IEP-01". Adopted by the Commission November 12, 2003. California Energy Commission publication number 100-03-019F.
- Flynn, P. (Editor). 2003. "The XML FAQ." Maintained on behalf of the World Wide Web Consortium's XML Special Interest Group, version 3.01 (publication number 2003-01-14).
- Goldman, C.A., M. Kintner-Meyer, and G. Heffner. 2002. "Do "Enabling Technologies" Affect Customer Performance in Price-Responsive Load Programs?" Lawrence Berkeley National Laboratory, Berkeley, CA. LBNL-50328.
- Goldman, C.A., N. Hopper, O. Sezgen, M. Moezzi, R. Bharvirkar, B. Neenan, R. Boisvert, P. Cappers, and D. Pratt. 2004. "Customer Response to Day-ahead Wholesale Market Electricity Prices: Case Study of RTP Program Experience in New York." Prepared for The California Energy Commission. LBNL Report (Forthcoming).
- International Performance and Measurement Verification protocol (IPMVP). 2001. "IPMVP Volume I: Concepts and Options for Determining Energy and Water Savings."
- KEMA-Xenergy. 2002. "Enhanced Automation: Technical Options Guidebook." California Energy Commission publication number 400-02-005F.
- KEMA-Xenergy. 2003. "Protocol Development for Demand Response Calculation - Findings and Recommendations: Consultant Report". California Energy Commission publication number 400-02-017F.
- Kinney, S., M.A. Piette, L. Gu, and P. Haves. 2001. "Demand Relief and Weather Sensitivity in Large California Commercial Office Buildings." Proceedings of the 2001 International Conference for Enhanced Building Operations. LBNL-48285.
- Kintner-Meyer, M., C. Goldman, O. Sezgen, and D. Pratt. 2003. "Dividends with Demand Response." *ASHRAE Journal*, October.
- Koomey, J., and R. Brown. 2002. "The Role of Building Technologies in Reducing and Controlling Peak Electricity Demand." LBNL-49947. September.
- Motegi, N., M.A. Piette, S. Kinney, and K. Herter. 2003a. "Web-based Energy Information Systems for Energy Management and Demand Response in Commercial Buildings." LBNL Report 52510.
- Motegi, N., and M.A. Piette, S. Kinney, and Jim Dewey. 2003b. "Case Studies of Energy Information Systems and Related Technology: Operational Practices, Costs, and

Benefits.” Proceedings of the International Conference of Enhanced Building Operations. LBNL Report 53406.

Neenan, B., D. Pratt, P. Cappers, J. Doane, J. Anderson, R. Boisvert, Goldman, C., O. Sezgen, G. Barbose, R. Bhavirkar, M. Kinter-Meyer, S. Shankle and D. Bates. 2003. “How and Why Customers Respond to Electricity Price Variability: A Study of NYISO and NYSERDA 2002 PRL Program Performance.” LBNL-52209.

Nexant. 2002. “AB 29X and SB 5X Program Evaluation. First Quarter Report (January 1 to March 1, 2002).” Submitted to the California Energy Commission. Contract #400-00-070.

Nexant. 2001. “AB 979, AB 29X and SB 5X Peak Load Reduction Programs. December 2001 Annual Report.” Submitted to the California Energy Commission and the California State Legislature.

Piette, M.A, S. Kinney, LBNL; M. Levi, D. McBride and S. May. 2002. “GEMnet Status and Accomplishments: GSA's Energy and Maintenance Network.” Proceedings of the 2002 ACEEE Summer Study Proceedings. May 2002, LBNL-50733.

Piette, M.A., 1991. *Controls to Reduce Electrical Peak Demands in Commercial Buildings*. Center for the Analysis and Dissemination of Demonstrated Energy Technologies. CADDET Analyses Series 7, ISBN 90-72647-17-3. August 1991.

Shockman, C., O. Sezgen, N. Motegi, M.A. Piette, and D. Watson. 2004. “Market Transformation Lessons Learned from an Automated Demand Response Test in California.” ACEEE Summer Study on Energy Efficiency in Buildings proceedings. August 2004.

Urban, G. L., and E von Hippel. 1988. "Lead User Analyses for the Development of New Industrial Products." *Management Science* volume 34, number 5 (May):569-82.

Webopedia. 2004. <http://www.webopedia.com/TERM/X/XML.html>. Accessed March 15, 2004.

Development and Evaluation of Fully Automated Demand Response In Large Facilities

APPENDICES

March 30, 2004

**Mary Ann Piette
Osman Sezgen
David S. Watson
Naoya Motegi
Lawrence Berkeley National Laboratory**

**Christine Shockman
Shockman Consulting**

**Laurie ten Hope
Program Manager, Energy Systems Integration**

Sponsored by the California Energy Commission

Table of Contents

Appendix I.	Acronyms and Terminology.....	I-1
Appendix II.	Methodology – Additional Details.....	II-1
Appendix II-1.	Whole-Building Level Method, Additional Detail.....	II-1
Appendix III.	Sample Memorandum of Understanding	III-1
Appendix III-1.	Project Participant Memorandum of Understanding	III-1
Appendix III-2.	Automated Demand Response Test Questionnaire	III-4
Appendix III-3.	Time Schedule for Demand Response Test Participants	III-6
Appendix III-4.	Price Signal for the Automated Demand Responses Tests	III-7
Appendix III-5.	RT Pricing Web Methods and XML Schema.....	III-10
Appendix IV.	Participants List	IV-1
Appendix V.	Site Questionnaires (Test 1, Test 2).....	V-1
Appendix V-1.	Site Questionnaires – Albertsons.....	V-1
Appendix V-2.	Site Questionnaires – Bank of America	V-3
Appendix V-3.	Site Questionnaires – GSA Oakland.....	V-5
Appendix V-4.	Site Questionnaires – Roche.....	V-8
Appendix V-5.	Site Questionnaires – UCSB	V-9
Appendix VI.	Site Data Collection Points List	VI-1
Appendix VI-1.	Albertsons – Point List.....	VI-1
Appendix VI-2.	Bank of America – Point List.....	VI-1
Appendix VI-3.	GSA Oakland – Point List.....	VI-3
Appendix VI-4.	Roche – Point List and Fan Spot Measurement Plan.....	VI-5
Appendix VI-5.	UCSB – Shed Strategies and Point List	VI-9
Appendix VII.	Additional Result Tables and Figures	VII-1
Appendix VII-1.	First Day Test Results	VII-1
Appendix VII-2.	B of A – Result Analysis by WebGen	VII-5
Appendix VII-3.	GSA – Additional Figures.....	VII-7
Appendix VII-4.	Roche – Additional Figures.....	VII-17
Appendix VII-5.	UCSB – Additional Figures	VII-19
Appendix VIII.	Previous DR Participation and Site Contact	VIII-1
Appendix VIII-1.	Prior Demand Response Program Participation	VIII-1
Appendix VIII-2.	Interaction with Site Contacts	VIII-4
Appendix VIII-3.	Problems Encountered During Test Period.....	VIII-8

Appendix I. Acronyms and Terminology

Abstraction. In this document, the term “abstraction” is used with regard to translations between different communication protocols or I/O point mappings. In abstraction, details of one protocol or data format are added or removed in order to function properly in the other. Through translation and abstraction, low level protocols (such as EMCS protocols) can be changed into a common protocol or language (such as TCP/IP and XML). This process is often bi-directional (See *translation, protocol, I/O, point mapping, EMCS, TCP/IP and XML*).

Auto-DR. Automated Demand Response

BACnet. An open data communication protocol for building automation and control networks. A data communication protocol is a set of rules governing the exchange of data over a computer network. The rules take the form of a written specification (in BACnet's case they are also on compact disk) that spells out what is required to conform to the protocol. BACnet was developed under the auspices of ASHRAE. The BACnet standard is also an ANSI standard (<http://www.bacnet.org/FAQ/HPAC-3-97.html>, BACnet.org 2004).

BACnet MSTP. Short for BACnet Master/Slave Twisted Pair. BACnet MSTP describes the characteristics of the BACnet communication protocol when used in a Master/Slave architecture over twisted pair wiring.

Bandwidth. The amount of data that can be transmitted in a fixed amount of time. For digital devices, the bandwidth is usually expressed in bits per second (bps) or bytes per second. For analog devices, the bandwidth is expressed in cycles per second, or Hertz (Hz) (Webopedia, 2004).

Business Logic. In the Auto-DR tests, business logic determines the EMCS actions to be implemented based on price and business rules.

Client (computer). The client part of a client-server architecture. Typically, a client is an application that runs on a personal computer or workstation and relies on a server to perform the operations requested by the client. For example, an e-mail client is an application that enables you to send and receive e-mail. In the Auto-DR tests the clients at each site polled the server to get current pricing information.

Co-lo. See *Co-Location*.

Co-Location. A server, usually a Web server, that is located at a dedicated facility designed with resources which include a secured cage or cabinet, regulated power, HVAC sufficient to cool all the electronic equipment, dedicated Internet connection, security and support. These co-location facilities offer their customers a secure place to physically house their hardware and equipment as opposed to locating it in their offices or warehouse where the potential for fire, theft or vandalism is much greater. Most co-

location facilities offer high-security, including cameras, fire detection and extinguishing devices, multiple connection feeds, filtered power, backup power generators and other features to ensure a level of high-availability which is mandatory for all Web-based, virtual businesses. Co-location sites are being built at various points around the world to provide services to the rapidly expanding Web hosting and e-commerce marketplace. The term co-location is also known as *co-lo* (Webopedia, 2004).

Control network. A network of controllers, data gathering panels and other devices that measure values from sensors and send commands to actuators. Control networks have been designed and optimized for the requirements of these systems including low installed cost and small communication packet sizes. Historically, many control networks have been based on RS-485 communications using proprietary protocols. Increasingly open protocols are being used including BACnet and LonTalk over RS-485 and Internet Protocols (IP). Control networks are generally separate from enterprise networks.

Data logging. The process by which data from I/O points are logged into a database.

Dewpoint. The temperature at which water vapor is saturated.

Digital outputs (DO). In an I/O controller, digital outputs are used to command equipment on or off. Physically, a digital output consists of an automatically controlled relay contact. Constant volume fans and pumps and lights can be commanded on or off with a digital output (see *I/O controller*).

DMZ. Short for demilitarized zone, a computer or small subnetwork that sits between a trusted internal network, such as a corporate private LAN, and an untrusted external network, such as the public Internet. Typically, the DMZ contains devices accessible to Internet traffic, such as Web servers. The term comes from military use, meaning a buffer area between two enemies (Webopedia, 2004).

DR. Demand Response.

EIS. Energy Information System.

Embedded devices. Special purpose computers with the following attributes:

- 1) Targeted functionality with little, if any, flexibility for the user to add different programs or customize the device.
- 2) User interfaces are usually limited to allow targeted functionality only. May include small LCD screens, LEDs, buttons switches and knobs. QWERTY keyboards and Cathode Ray Tube display screens are generally not included.
- 3) Memory is usually cost optimized for the targeted functionality. Read only memory (ROM) and flash memory chips are usually used in lieu drives with spinning disks.

- 4) Form factor is specially designed for the targeted functionality. Examples of embedded devices include Internet routers, automotive engine computers and cell phones.
- 5) Often designed for reliable continuous operation with little or no human interaction.

EMCS. Energy Management and Control System.

Enterprise. A business organization. In the computer industry, the term is often used to describe any large organization that utilizes computers. An intranet is an example of an enterprise computing system (Webopedia, 2004).

Ethernet. A local-area network (LAN) architecture developed by Xerox Corporation in cooperation with DEC and Intel in 1976. Ethernet uses a bus or star topology and supports data transfer rates of 10 Mbps. The Ethernet specification served as the basis for the IEEE 802.3 standard, which specifies the physical and lower software layers. Ethernet uses the CSMA/CD access method to handle simultaneous demands. It is one of the most widely implemented LAN standards. A newer version of Ethernet, called 100Base-T (or Fast Ethernet), supports data transfer rates of 100 Mbps. The newest version, Gigabit Ethernet supports data rates of 1 gigabit (1,000 megabits) per second (Webopedia, 2004)

Firewall. A system designed to prevent unauthorized access to or from a private network. Firewalls can be implemented in either or both hardware and software. Firewalls are frequently used to prevent unauthorized Internet users from accessing private networks connected to the Internet, especially intranets. All messages entering or leaving the intranet pass through the firewall, which examines each message and blocks those that do not meet the specified security criteria. There are several types of firewall techniques:

- 1) Packet filter: Looks at each packet entering or leaving the network and accepts or rejects it based on user-defined rules. Packet filtering is fairly effective and transparent to users, but it is difficult to configure. In addition, it is susceptible to IP spoofing.
- 2) Application gateway: Applies security mechanisms to specific applications, such as FTP and Telnet servers. This is very effective, but can impose performance degradations.
- 3) Circuit-level gateway: Applies security mechanisms when a TCP or UDP connection is established. Once the connection has been made, packets can flow between the hosts without further checking.
- 4) Proxy server: Intercepts all messages entering and leaving the network. The proxy server effectively hides the true network addresses.

In practice, many firewalls use two or more of these techniques in concert. A firewall is considered a first line of defense in protecting private information. For greater security, data can be encrypted (Webopedia, 2004).

Fully-Automated Demand Response. Fully-Automated Demand Response is initiated at a building or facility through receipt of an external communications signal – facility staff set up a pre-programmed load shedding strategy which is automatically initiated by the system without the need for human intervention.

Gateway. Gateways used in building telemetry systems provide several functions. First, they connect two otherwise incompatible networks (i.e., networks with different protocols) and allow communications between them. Second, they provide *translation* and usually *abstraction* of messages passed between two networks. Third, they often provide other features such as *data logging*, and control and monitoring of I/O points.

Generation. In electronics, computer equipment and software, the term “generation” is used to describe a major upgrade for which previous versions may or may not be compatible.

High Availability. Used to quantify the “uptime” for computer servers and systems. High availability is a requirement for operation of mission critical systems. High availability systems are often described in terms of the number of “nines” of availability (i.e., four 9s or 99.99% means less than one hour of unscheduled downtime per year).

HTTP. Short for HyperText Transfer Protocol, the underlying protocol used by the World Wide Web. HTTP defines how messages are formatted and transmitted, and what actions Web servers and browsers should take in response to various commands. For example, when you enter a URL in your browser, this actually sends an HTTP command to the Web server directing it to fetch and transmit the requested Web page (Webopedia, 2004).

Human Machine Interface (HMI). Nowadays humans interact more with computer-based technology than with hammers and drills. Unlike tools, the visible shape and controls of a computer do not communicate its purpose. The task of an HMI is to make the function of a technology self-evident. Much like a well-designed hammer fits the user's hand and makes a physical task easy; a well-designed HMI must fit the user's mental map of the task he or she wishes to carry out (International Engineering Consortium (www.iec.org), 2004). In control systems, the HMI usually takes the form of a computer display screen with specially designed graphical representations of the mechanical systems or processes including real-time data from sensors.

HVAC. Heating, Ventilation, and Air Conditioning.

I/O. Abbreviation for Input/Output. Commonly used in the controls industry. Refers to inputs (such as sensors) and outputs (such as actuators) (see *abstraction*, *point mapping* and *translation*).

I/O controller. A device that measures input values from sensors and commands outputs such as temperature control valves, usually to maintain a defined setpoint. An I/O controller has the internal intelligence to perform local control.

I/O module. A device that measures input values from sensors and commands outputs such as temperature control valves based on instructions from a remote controller. An I/O module usually does not have the internal intelligence to perform local control.

Internet. A global network connecting millions of computers. More than 100 countries are linked into exchanges of data, news and opinions. Unlike online services, which are centrally controlled, the Internet is decentralized by design. Each Internet computer, called a host, is independent. Its operators can choose which Internet services to use and which local services to make available to the global Internet community. Remarkably, this anarchy by design works exceedingly well. There are a variety of ways to access the Internet, including through online services, such as America Online, and commercial Internet Service Providers (ISP) (Webopedia, 2004). References to the public Internet, as described here, are spelled “Internet” (capital “I”). The lesser used term, “internet” (lower case “i”), refers to a network of intranets that are usually privately operated (see *intranet*).

Intranet. A network based on TCP/IP protocols (an internet) belonging to an organization, usually a corporation, accessible only by the organization's members, employees, or others with authorization. An intranet's Web sites look and act just like any other Web sites, but the *firewall* surrounding an intranet fends off unauthorized access. Like the Internet itself, intranets are used to share information (Webopedia, 2004).

IP I/O device. A device that measures inputs (e.g., electric meter data) and controls outputs (e.g., relays) that can be measured and actuated remotely over a LAN, WAN or Internet using Internet Protocols (IP).

IP relay. A device with a relay or relays that can be actuated remotely over a LAN, WAN or Internet using Internet Protocols (IP).

ISO. Independent System Operator.

IT. Short for Information Technology, and pronounced as separate letters, the broad subject concerned with all aspects of managing and processing information, especially within a large organization or company. Because computers are central to information management, computer departments within companies and universities are often called IT departments. Some companies refer to this department as IS (Information Services) or MIS (Management Information Services) (Webopedia, 2004).

LAN. A computer network that spans a relatively small area. Most LANs are confined to a single building or group of buildings. Most LANs connect workstations and personal computers. Each node (individual computer) in a LAN has its own central processing unit (CPU) with which it executes programs, but it also is able to access data and devices anywhere on the LAN. This means that many users can share devices, such as laser printers, as well as data. Users can also use the LAN to communicate with each other

such as by sending e-mail. There are many different types of LANs with Ethernets being the most common for PCs (Webopedia, 2004).

Load balancing. Distributing processing and communications activity evenly across a computer network so that no single device is overwhelmed. Load balancing is especially important for networks where it's difficult to predict the number of requests that will be issued to a server. Busy Web sites typically employ two or more Web servers in a load balancing scheme. If one server starts to get swamped, requests are forwarded to another server with more capacity. Load balancing can also refer to the communications channels themselves (Webopedia, 2004).

LonTalk™. An open communications protocol used in building control systems and other industries. Publicly published under ANSI/ EIA -709.1 - (American National Standards Institute/Electronic Industries Alliance). Since 1999, LonTalk protocol may be implemented on any microprocessor.

LonWorks™. Control and communication products available from Echelon Corporation and other companies using Echelon products. LonWorks products use LonTalk open protocol for communications (see *LonTalk*).

Machine-to-Machine (M2M). Machine to Machine (M2M) is a term used to describe the technologies that enable computers, embedded processors, smart sensors, actuators and mobile devices to communicate with one another, take measurements and make decisions - often without human intervention.

Manual Demand Response. Manual demand response involves manually turning off lights or equipment; this can be a labor-intensive approach.

MCC. Motor Control Center.

Modbus. An open standard control network protocol originally developed by Modicon, a simple master/slave protocol over RS-485. Current protocol also supports TCP/IP over an Ethernet. Modbus is a common interface with electrical equipment such as meters and generators. It is not typically used for whole building EMCSs.

Modem. A hardware device that allows computers to communicate with one another over any phone-based network.

NOC. Short for network operations center, the physical space from which a typically large telecommunications network is managed, monitored and supervised. The NOC coordinates network troubles; provides problem management and router configuration services; manages network changes; allocates and manages domain names and IP addresses; monitors routers, switches, hubs and UPS systems that keep the network operating smoothly; and manages the distribution and updating of software and coordinates with affiliated networks. NOCs also provide network accessibility to users

connecting to the network from outside of the physical office space or campus (Webopedia, 2004).

OAT. Outside air temperature.

oBIX. Open Building Information eXchange is an industry-wide initiative to define open XML- and Web services-based mechanisms for building control systems.

ODBC. Short for Open DataBase Connectivity, a standard database access method developed by Microsoft Corporation. The goal of ODBC is to make it possible to access any data from any application, regardless of which database management system (DBMS) is handling the data. ODBC manages this by inserting a middle layer, called a database driver, between an application and the DBMS. The purpose of this layer is to translate the application's data queries into commands that the DBMS understands. For this to work, both the application and the DBMS must be ODBC-compliant -- that is, the application must be capable of issuing ODBC commands and the DBMS must be capable of responding to them. Since version 2.0, the standard supports SAG SQL (Webopedia, 2004).

Onboard. Refers to electronic components that are mounted on the main printed circuit board as opposed to components that are mounted remotely and connected via wires.

Open protocol. A communications protocol that is used to communicate between devices of any compliant manufacturer or organization. Open protocols are published in a public forum for use by all interested parties (see *proprietary protocol*).

Point mapping. The process by which I/O points are mapped to another system or protocol (see *abstraction*, *I/O* and *translation*).

Point of sale (POS). Refers to all components in the POS system including bar code scanners, cash registers, printers and all communications equipment that is used to transfer information about the sale of each item back to a central database. At some sites in the Auto-DR tests, the point of sale communications infrastructure was used to command the shed of electric loads based on electricity pricing information.

Poll. A method by which one computer requests information from another.

Polling Client. In the Auto-DR tests, the polling client is the software used to poll the server to get the price signal.

Price Server. In the Auto-DR tests, the price server is the common source for the current price information.

Proprietary protocol. A communications protocol that is used to communicate between devices of one manufacturer or organization while effectively disallowing all other

devices to exist on the same network. Proprietary protocols are not published in a public forum (see *open protocol*).

Protocol (data communication). A data communication protocol is a set of rules governing the exchange of data over a computer network.

Public Switched Telephone Network (PSTN). International telephone system based on copper wires carrying analog voice data. This is in contrast to newer telephone networks based on digital technologies (Webopedia 2004).

Pull architecture. In a client-server architecture, the client “pulls” information from the server by polling (see *poll*).

Pulse. Contact closures that are measured by an I/O device. Pulses are often produced by electric meters and other devices to indicate a given unit of measurement (for example, 1 pulse = 1 kWh).

Real-time. In real-time control and monitoring systems, data is measured, displayed and controlled at a rate fast enough that the system latencies are negligible compared with the process at hand. Acceptable latency can vary substantially based on the type of process (for example, from 1 millisecond to several minutes).

Semi-Automated Response. Semi-Automated Response involves the use of building energy management control systems for load shedding, where a pre-programmed load shedding strategy is initiated by facilities staff.

Sensor. a device that responds to a physical stimulus (heat, light, sound, pressure, magnetism, or a particular motion) and transmits a resulting impulse that can be used for measurement or operating a controller (Merriam-Webster Online Dictionary, 2004).

Server (computer). Servers are often dedicated, meaning that they perform no other tasks besides their server tasks. On multiprocessing operating systems, however, a single computer can execute several programs at once. A server in this case could refer to the program that is managing resources rather than the entire computer. In the 2003 Auto-DR tests, pricing information was “served” from a Web services server hosted by Infotility, Inc.

Setpoint. The target value that an I/O controller attempts to maintain. Setpoint values (for example, temperature or pressure) are maintained through adjustments of the final control elements (temperature control valves, dampers, etc.).

SIMM. Acronym for single in-line memory module, a small circuit board that can hold a group of memory chips. Typically, SIMMs hold up to eight (on Macintoshes) or nine (on PCs) RAM chips. On PCs, the ninth chip is often used for parity error checking. Unlike memory chips, SIMMs are measured in bytes rather than bits. SIMMs are easier to install than individual memory chips. The bus from a SIMM to the actual memory chips is 32

bits wide. A newer technology, called dual in-line memory module (DIMM), provides a 64-bit bus. For modern Pentium microprocessors that have a 64-bit bus, you must use either DIMMs or pairs of SIMMs (Webopedia, 2004)

SOAP. Short for Simple Object Access Protocol, a lightweight XML-based messaging protocol used to encode the information in Web service request and response messages before sending them over a network. SOAP messages are independent of any operating system or protocol and may be transported using a variety of Internet protocols, including SMTP, MIME, and HTTP (Webopedia, 2004).

Systems Integrator. An individual or company that specializes in building complete computer systems by putting together components from different vendors. Unlike software developers, systems integrators typically do not produce any original code. Instead they enable a company to use off-the-shelf hardware and software packages to meet the company's computing needs (Webopedia, 2004).

TCP/IP (Transmission Control Protocol / Internet Protocol). Internet Protocol that specifies the format of packets and the addressing scheme. Most networks combine IP with a higher-level protocol called Transmission Control Protocol (TCP), which establishes a virtual connection between a destination and a source.

Telemetry. A communications process that enables monitoring and/or control of remote or inaccessible sensors and actuators. Telemetry often uses radio frequency signals or Internet technologies for communications.

Time stamp. A digital message that indicates the time in which a given computer transaction occurred. The time stamp message is usually associated with and stored with the original transaction record. Time stamps are also to note when data is logged or stored.

Translation. The process by which I/O points are translated to another system or protocol. Translation changes messages in one protocol to the same messages in another (see *abstraction*, *I/O* and *point mapping*).

UTC. "Coordinated Universal Time" (abbreviated UTC), is the basis for the worldwide system of civil time. This time scale is kept by time laboratories around the world, including the U.S. Naval Observatory, and is determined using highly precise atomic clocks (U.S. Naval Observatory 2004 <http://aa.usno.navy.mil/faq/docs/UT.html>). UTC differs from Greenwich Mean Time (GMT) in that GMT is based on the rotation of the Earth which is substantially less accurate than atomic clocks. When GMT differs from UTC by more than 0.9 seconds, UTC is re-calibrated by adding a "leap second" so that it is closer to the (less precise and uncontrollable) rotation of the Earth.

VPN. Short for virtual private network, a network that is constructed by using public wires to connect nodes. For example, there are a number of systems that enable you to create networks using the Internet as the medium for transporting data. These systems use

encryption and other security mechanisms to ensure that only authorized users can access the network and that the data cannot be intercepted (Webopedia, 2004).

WAN (Wide Area Network). A computer network that spans a relatively large geographical area. Typically, a WAN consists of two or more local-area networks (LANs). The largest WAN in existence is the Internet, which is open to the public. Private and corporate WANs use dedicated leased lines or other means of assuring that the network is only available to authorized users of the organization (Webopedia, 2004).

WBP. Whole building power.

Web Services. The infrastructure of the Auto-DR System is based on a set of technologies known as Web Services. Web Services have emerged as an important new type of application used in creating distributed computing solutions across the Internet. Properly designed Web services are completely independent of computer platform (Microsoft, Linux, Unix, Mac, etc.). Web pages are accessed by people to view information on the Internet. Web services are used by computers to share information on the Internet. Since human intervention is not required, this technology is sometimes referred to as “Machine-to-Machine” or “M2M”. XML is often used to enable Web services. M2M is a superset of technologies that includes some XML/Web services based systems (see *XML, Machine to Machine*).

XML (Extensible Markup Language). XML is a “meta-language”, a language for describing other languages that allows the design of customized markup languages for different types of documents on the Web (Flynn, 2003). It allows designers to create their own customized tags, enabling the definition, transmission, validation, and interpretation of data between applications and between organizations (Webopedia, 2004).

Appendix II. Methodology – Additional Details

Appendix II-1. Whole-Building Level Method, Additional Detail

Outside air temperature (OAT) regression models were developed for each fifteen minute time interval (See Figure III-2 for some of the regression models generated for the GSA data). A total of 96 models were developed for one test day. For example, the whole building power and outside air temperature (OAT) at 1:15 p.m. on the previous days' are used as input data to develop a regression model for 1:15 p.m. on the test day. To estimate the shed-day baseline power [kW] at 1:15 pm, OAT trend data at 1:15 pm of the shed-day is put into the regression model equation. The whole building power baseline load shape is developed by doing this for each 15-minute interval.

Indication from the regression models are;

- Right-up slope indicates that whole building power (WBP) increases as OAT rises.
- Steeper slope indicates stronger correlation between WBP and OAT.
- Flat slope indicates WBP is not significantly affected by OAT.
- The width of the data range in WBP indicates the degree of errors. Wider width ranges indicates larger errors.

The lines generated using the regression models for the time intervals during operating hours (9:00, 12:00 and 15:00) have steep slopes, indicating that WBP has a strong correlation with OAT. On the other hand, the models at night have flat slopes. Nighttime operation is constant and not significantly affected by OAT.

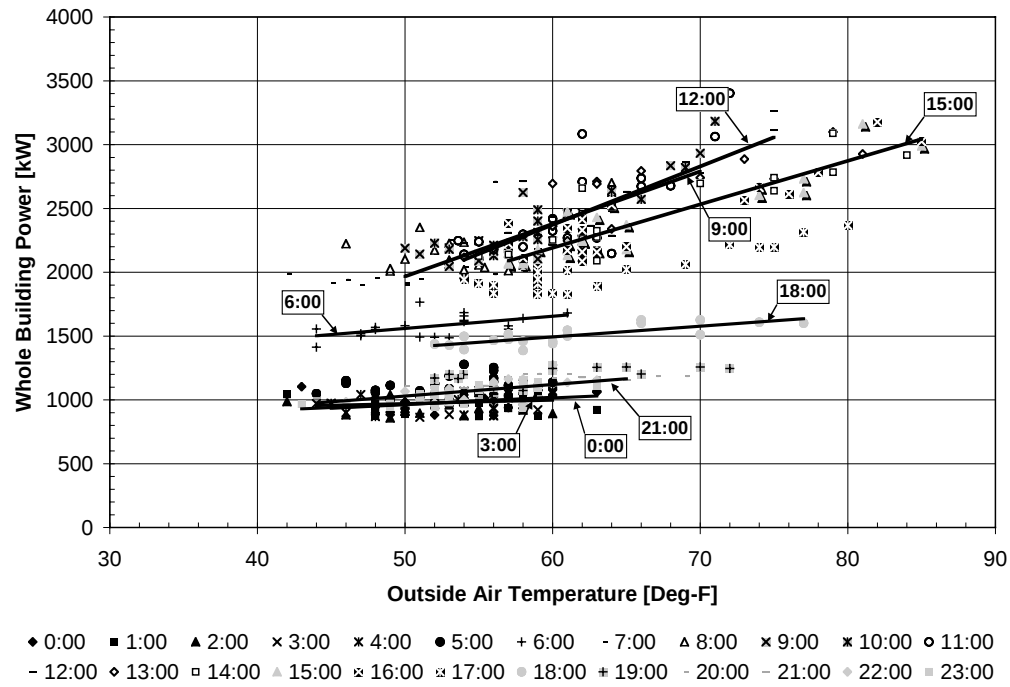


Figure II-1. OAT Linear Regression Model for A Sample of the 96 Fifteen Minute Time Intervals (GSA)

Appendix III. Sample Memorandum of Understanding

Appendix III-1. Project Participant Memorandum of Understanding

**Project Participant Memorandum of Understanding
Between
Environmental Energy Technologies Division,
Lawrence Berkeley National Laboratory (LBNL)
and
(Organization Name)
Demand Responsive Technology Demonstration**

August 27, 2003

Introduction

LBNL has developed a research project for the California Energy Commission to test automated Demand Response (DR) technologies in buildings. This Memorandum of Understanding (MOU) provides a brief description of the objectives of the DR project, what LBNL plans to undertake and what is expected of the Participant.

Project Objectives

The objectives of this research project are:

- to improve understanding of the status of automated demand responsive building systems, particularly the levels of automation in best practices
- to quantify demand-savings potential of automated demand responsive systems
- to identify technology gaps and priorities to improve future systems
- to understand key features of the market for DR systems and decision making perspectives about the adoption of DR technology
- to develop and test an automated signal to initiate demand response events

Collection of Information on DR System

LBNL has selected site name (*city, state*) to participate in the DR Demonstration project because of the State-Of-the-Art building control technology at the site. LBNL will collect and compile the following type of information to include but is not limited to:

- Site characteristics (size, type, location, HVAC systems, etc.)
- DR-Systems: software, firmware, and hardware, etc., installed at the site.
- Monitoring, control, and reporting attributes of the system
- Level of automation, human expertise and experience required
- DR-System and Energy Management capabilities and strategies used: How is the DR-system used to optimize energy performance, shed, or shift demand?

- Document first costs for technologies that facilitates the automated demand-response, including capital and installation costs
- Estimate operating costs, including maintenance and support costs: How does the DR enabling technology change operating costs?
- Determine peak demand and energy savings: How does the DR technology increase flexibility of the facility and therefore increase savings in energy expenditures?

The “Automated Demand Response Test Site Questionnaire” dated August 5, 2003 is to be completed and returned to Dave Watson (dswatson@lbl.gov) by August 15, 2003. Owner/operators will coordinate this effort with their Energy Information System suppliers. Dave Watson is available at 510 486 5562.

The Participant agrees to provide the above information to LBNL. Much of the information will be included in a public report from LBNL to the CEC. Upon Participant’s advance request, LBNL will provide a copy of the report to Participant prior to making such report public.

Demand Response Test

All participants are responsible for reviewing and meeting the attached “Time Schedule for Demand Response Test Participants” dated August 5, 2003.

During late summer 2003 LBNL will send the Participant an XML signal via the internet that contains information to represent electricity prices.

The Participant will work with their controls and DR system vendor and in house staff to modify their system to be able receive or retrieve the XML signal, send back an acknowledgement, and initiate an automated shed. The tests will take place during a 2 week period in late September or October 2003. The automated response will not be requested during more than two working days. These days may be non-consecutive. Within a test day, response will not be requested for more than 3 hours. The Participant will be able to override the test if need be. However, LBNL would like to verify that the shed was fully automated with no operator intervention.

Further definition of the price signal is provided in two documents “Price Signal for the Automated Demand Responses Tests” (dated June 26, 2003) and “RT Pricing Web Methods and XML Schema” (dated August 4, 2003, revised from the July 2, 2003 RT Pricing Web Methods and XML Schema document), which are attached. The baseline price for no action will be 10 cents/kWh. The first level of price increase will be to 30 cents/kWh. The second level will be 75 cents/kWh. Triggers for the automated shed should be based on those prices.

LBNL plans to compile HVAC, control, communications, energy, and other building time series data during the test to evaluate the shed. The development of this information to evaluate the success of the automated shedding will require additional collaboration

between LBNL, the building owner/operator, and the EIS provider. Time for this collaboration effort should be anticipated. LBNL plans to report on the results of the shed in a report to the CEC. Results from the Participant will be compared with results from other sites as well.

Terms of Agreement

LBNL is in no way responsible for any issues that arise at the building facility as a result of the tests. LBNL understands that due to circumstances that cannot be predicted, the Participant may not be able to complete their participation in the project. LBNL would like to be informed of such a decision at least one month in advance of the test.

This memorandum is intended to memorialize the understanding of LBNL and Participant in the research of automated DR in buildings. The parties agree that this memorandum is not intended to be legally binding and that if the parties desire to create specific, legally-binding obligations, such binding obligations shall only arise under a separate written agreement signed by duly authorized representatives of both parties.

Signed:

Mary Ann Piette
Staff Scientist, and Deputy Group Leader
Lawrence Berkeley National Laboratory

Signature:

Date:

Contact Name

Title

Organization

Signature:

Date:

Attachments (Reference Documents)

- Automated Demand Response Test Site Questionnaire - Updated August 5, 2003
- Time Schedule for Demand Response Test Participants - Updated August 5, 2003
- Price Signal for the Automated Demand Responses Tests – Dated June 26, 2003
- RT Pricing Web Methods and XML Schema – Updated August 4, 2003

Appendix III-2. Automated Demand Response Test Questionnaire

Automated Demand Response Test-Site Questionnaire

Updated August 5, 2003

- 1) What is the vendor & system type of the EMCS? (e.g. Johnson MetaSys)
- 2) What protocols are supported by the EMCS? (e.g. N2, BACnet, LON, Proprietary)
- 3) What is the gateway vendor that connects EMCS to the remote access network? (e.g. same vendor as EMCS, Silicon Energy, Envenergy etc.)
- 4) Can the gateway export meter-data using http (port 80) and can it format them in XML?
- 5) Can the gateway exports the data to a third party server?
- 6) How does the gateway communicate to the equipment or automation system?
What is the protocol used to communicate (BACNET, LON. MODBUS)?
- 7) Who was the installing contractor for the DR system? (e.g. the EMCS vendor, the gateway vendor, other)
- 8) Describe the remote access network: (e.g. Corporate LAN/WAN, T1, DSL, Cable modem, POTS/PSTN modem (dial-up), pager network, other). How does the gateway communicate back to the host or central server (TCP/IP, proprietary)?
- 9) In addition to Demand Response capability, does the system provide:
 - Real-time Remote monitoring of EMCS?
 - Real-time monitoring of revenue meters and other sub-meters?
 - Remote control of EMCS (e.g. adjust setpoints)?
 - Remote alarm annunciation (text messaging, pagers, email)?
 - Trended data viewing & downloading? How is data being logged?
- 10) What is the location of the device that will receive the XML signal (on-site, off site)?
- 11) What device will be receiving the XML signal (gateway, central server, other device)?
- 12) To receive the XML signal, the device must have a public IP address. If the device is behind a firewall, what TCP/IP ports are accessible?
- 13) If the system features remote web access, what is the location of the web server (on-site, off-site)?

- 14) Describe the amount of labor necessary to revise the system to interface with the defined standard XML signal (do not include logic changes to EMCS for load shedding).
- 15) On the LAN where the gateway is installed, which ports are open (in, out) on the firewall?
- 16) On the LAN where the device receiving price signal is installed, which ports are open (in, out) on the firewall?
- 17) Describe the system cost including hardware, software, licensing and initial installation fees, annual or monthly fees, and service or maintenance fees.

Appendix III-3. Time Schedule for Demand Response Test Participants

Time Schedule for Demand Response Test Participants (Dated – August 5, 2003)		
July 30, 2003	All	Meet at LBNL with other participants, technology review
August 15, 2003	Owner EIS Provider	Return MOU and Automated Demand Response Test Site Questionnaire to LBNL
August 22, 2003	LBNL	Completion of Measurement & Verification Plan
September 5, 2003	EIS Provider & Infotility	Confirmation of Connectivity
Two weeks during late September or Early October 2003	All	DR test conducted, randomly for two days during this period
October & November 2003	LBNL	Data Analysis

Appendix III-4. Price Signal for the Automated Demand Responses Tests

MEMO: Price Signal for the Automated Demand Response Tests

FROM: Osman Sezgen and Mary Ann Piette
Lawrence Berkeley National Laboratory
TO: Participating Facilities

DATE: June 26, 2003

This memo provides an overview of the price signals for the automated Demand Response (DR) test.

The automated DR tests will be initiated by an electricity price signal sent from Infotility using “push” architecture. [Push architecture will be used if the technology used by the EMS can support it or can integrate it. If not, “pull” architecture will be used--the EMS queries a server that returns the real time price.] The profile of the price-signal will be determined and controlled by the Lawrence Berkeley National Laboratory as further described below.

We request that each site acknowledges the receipt of the price data as further described below. Following receipt of the signal we request that your system automatically initiates your load shedding response when the price signal moves to a level above standard time-of-use pricing. We will discuss this with you.

The signal itself will be simple and the profile of the electric prices will be designed to cause minimal inconvenience to the facilities that are participating in the DR test.

Description of the Price-Signal (Hardware/Software Point of View)

The price signal will be broadcasted every 15 minutes (approximately on the hour, and every fifteen minutes after the hour). The price broadcasted will be in effect in about 15 minutes. (The facility will have at least 15 minutes of advance notice before the price changes.) Every signal will have two time stamps: (1) the time that it is broadcasted, and (2) the time that it will be in effect. The time that the signal is broadcasted may be slightly earlier than the 15-minute notice period but the times of effectiveness of prices will be on discrete times (on the hour and every fifteen minutes after the hour). The time that it will be in effect is a 15 min ending time.

The communications systems at the facility will need to be programmed to accept the electric price signals from Infotility and send an acknowledgement signal back. This acknowledgement signal should include the full information about the original signal including the time stamps.

The facility will need to provide an IP address to Infotility. This address is going to be used as the target for the price information. To be able to receive price information pushed by Infotility, there are 2 options:

1. “Push” architecture: The EMS of the facility will have to integrate a “connector” that communicates with the Infotility servers in real time (“Push” architecture).
2. “Pull” architecture: actually, the “pull” architecture includes both “push” and “pull” technologies: an application from Infotility would be installed on a computer on the LAN of the facility. Infotility’s servers would push real time pricing to this application. The EMS of the facility would pull the real time prices from this application.

Description of the Price-Signal (Operations Point of View)

Although the signal is designed to change every fifteen minutes, the actual signal will be constrained to make it less onerous to the participating facilities. The objectives are:


- Give some predictability on the frequency side (frequency of price changes)
- Give some predictability on the price side (level of prices)
- Give some predictability on the duration of the high prices

The shape of the signal will be such that:

- When the price level changes, the level will stay the same for at least one full hour.
- There will be three levels of price: normal (10 cents/kWh), medium (30cents/kWh) and high (75 cents/kWh), the facility operator can preprogram response actions for each level.
- The duration of price changes to higher than normal will not exceed 3 hours (thus shorter than CPP) and prices will move above normal only once during one day (once prices move, the facility can be sure that it will be back to normal within 3 hours and will not move again for the day).
- Signals may change prices between the hours 12pm to 7pm (weekdays). The latest signal that may change prices will be for 6pm and will change the price effective between 6pm to 7 pm.
- The tests will take place within 2 weeks and we will not change prices during more than two working days within this period. Thus, we want all of the communication systems to be ready for the test at the same time. The test is intended to take place at all 6 sites in real time.

For example, as shown in Figure 1 if we would like to change the price to a medium level at 12pm, we will send a signal by 11:45 am. Once we set the price for 12pm, we will not change it until 1pm. If we want to change the price at 1 pm (to high or normal), we will send another signal by 12:45 pm. If we change the price to medium at 12pm and high at 1pm, we can only hold the prices above normal until 3 pm. If we set the price to medium at 12pm and set it back to normal at 1pm, we will not change the price level again until possibly the next weekday.

Finally, the facility will be able to opt out within the 15-minute notice period just before a higher price comes into effect. (During the time period between when the signal is sent and when the price is in effect, the facility can inform us and opt out of the test.)

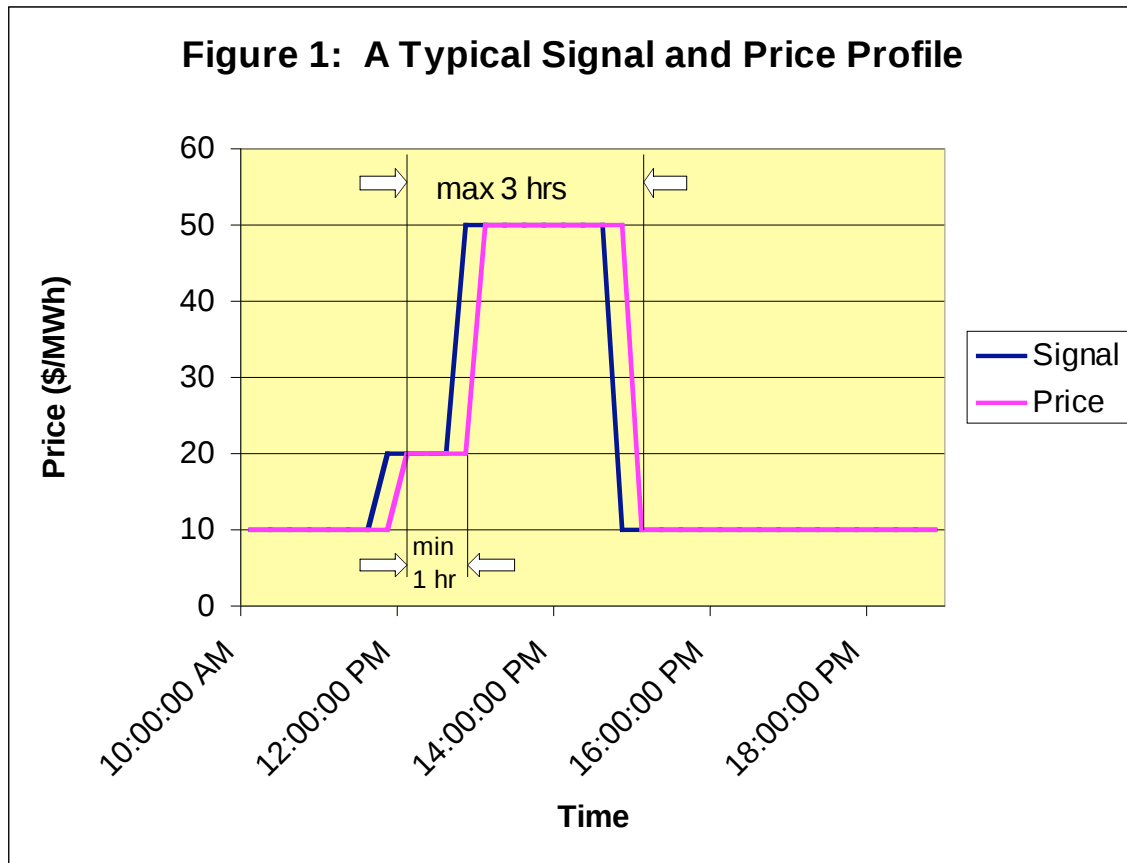

Appendix III-5. RT Pricing Web Methods and XML Schema

RT Pricing: Web Methods and XML Schema

Author: Nicolas Kardas (Infotility) with additions from Mary Ann Piette (LBNL)


Date: August 4th, 2003

1. Introduction:

Infotility will deliver an electricity price stream to the facilities in the automated demand response research project developed by Lawrence Berkeley National Laboratory. The client applications connected to the LAN at the user's site can receive the electricity price stream through a variety of methods. The client application may direct the price stream directly to an Energy Management Control System (EMCS), an electric meter, an Energy Information System (EIS) gateway device or any a software application. These options are shown in Figure 1. Based on previous discussions with the 6 sites, we believe that most sites will received the information through and EIS or related EMCS application.

Note: a client application may not be needed: the EMCS/EIS can directly call the web services.

Figure 1. Real-time Pricing Delivery Service Example

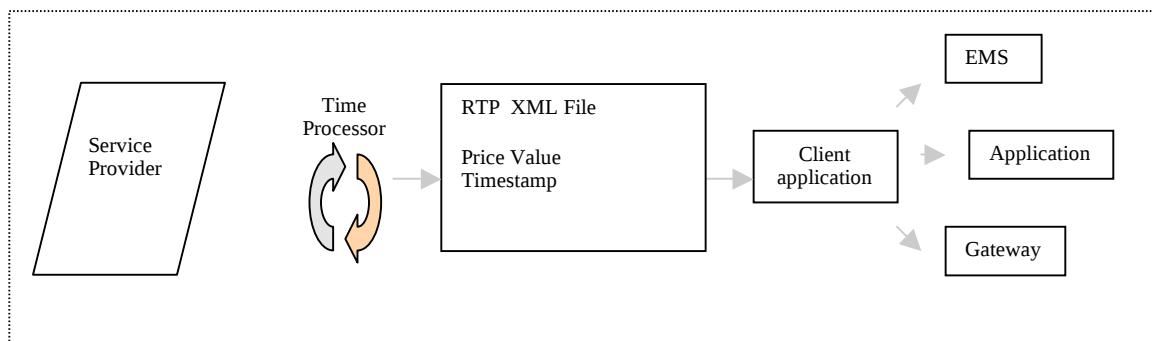

In order to get access to the prices, there are 2 options:

1. Option 1: The End-users regularly call a Web service that returns the prices. This would be done automatically by the client application or the EMCS/EIS. The prices are formatted using the XML RT Pricing schema (see below).
2. Option 2: The client application or the EMCS integrates a component that automatically receives the new prices when they are available on the server. This requires more integration work than option 1.

Option 1 is certainly the easiest implementation since it relies on Web services to pass the prices to the client applications. EMS/EIS may already have connectors available to call Web services methods.

The project team and the participants have considered both options and have decided to use only the option 1 for this project.

2. The server will check that the price are successfully received by the participants EIS

In order to give to the project team visibility regarding which participants get the price, when they get it and if they get it right, the servers logs each web service transaction between the server and the participant EIS and checks that the prices are received correctly by the participants EIS.

To be able to perform this check, when a participant EIS calls a web service to get a new price, it has to pass, as a parameter, the value of the last price it received from the server and the timestamp of this price. The server will log this data and will check that the price received by the participant EIS is the same as the one that was returned by the server.

If a participant EIS has not called the web service for more than x minutes or if the price was not successfully received by the participant, an Email alert will be sent to the participant and the project team.

3. Web methods to call to get Real Time Prices

They are 2 steps to get a real time price from Infotility's servers:

- Step 1: Login to the system
- Step 2: Call a Web method to get the real time prices

3.1. Web method to login

The signature of the Web method is the following:

```
public DataSetClientWSReturns Sessions_Login (  
    string strEmail,  
    string strPassword,  
    ref string strWho,  
    ref bool bLoggedIn,  
    ref int iUserID)
```

This method must be called only once when the application starts. The Email and Password are passed to uniquely identify the user in the system. The method returns 3 parameters:

- strWho: it is a unique key that identifies the session that has been created for the user in the system. This parameter is returned by the server. This parameter has to be passed in each web method call to get the price data.
- bLoggedIn: it is equal to true if the login has been successful on the server
- iUserID: the userID of the user in the system.

3.2. Web method to retrieve Real Time Prices

```
public DataSetClientData GetNextPrice(  
    int iReqUserID,  
    string strWho,  
    ref bool bSessionTimeOut,  
    string strReqChannelIDList,  
    string DateTimeLastCall,  
    float ValueLastCall)
```

To call this web method, the client application must pass the following parameters:

- iReqUserID: set it to the userID parameter returned by the Web method Sessions_Login

- strWho: set it to the strWho parameter returned by the Web method Sessions_Login
- strReqChannelIDList: Identifier of the price channel to retrieve (you will get this identifier from Infotility)
- DateTimeLastCall: The timestamp of the price that was returned by this web method the last time it was called. It corresponds to the Date_Time field of the DataSetClientData.xsd dataset returned by the server. The format of this parameter is a string: "mm/dd/yyyy hh:mm:ss"
- ValueLastCall: The value of the price that was returned by the web service method the last time this web method was called.

This Web method returns a parameter (boolean): bSessionTimeOut. This will be always false because the session duration will not be limited for the users of this project.

The Web method returns the price data in a dataset based on the RTPricing XML schema described below.

3.3. Other web methods

- public DataSetClientWSReturns LogoutOnServer(
 int iReqUserID,
 string strWho,
 ref bool bLoggedOut)

This method is used to logout. It is not required to use it because when the user logs in, the existing sessions are automatically cleared.

- DateTime GetSystemClock ()
 This method the current UTC time on the server

4. RT Pricing XML Schema

The RTPricing XML schema is defined by the following schema (DataSetClientData.xsd):

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema
  xmlns:mstns="http://tempuri.org/DataSetClientHistDataStr.xsd"
  xmlns:msdata="urn:schemas-microsoft-com:xml-msdata"
  xmlns="http://tempuri.org/DataSetClientHistDataStr.xsd"
  attributeFormDefault="qualified" elementFormDefault="qualified"
  targetNamespace="http://tempuri.org/DataSetClientHistDataStr.xsd"
  id="DataSetClientHistDataStr"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element msdata:IsDataSet="true" name="DataSetClientHistDataStr">
    <xs:complexType>
      <xs:choice maxOccurs="unbounded">
        <xs:element name="HistData">
          <xs:complexType>
            <xs:sequence>
              <xs:element msdata:ReadOnly="true"
msdata:AutoIncrement="true" name="DataID" type="xs:decimal" />
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:choice>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

```

        <xs:element name="ChannelID" type="xs:decimal" />
        <xs:element name="Date_Time" type="xs:string" />
        <xs:element minOccurs="0" name="DataValue"
type="xs:float" />
        <xs:element minOccurs="0" name="Status" type="xs:short"
/>
        <xs:element minOccurs="0" name="When_Created"
type="xs:string" />
        <xs:element minOccurs="0" name="Prev_Created"
type="xs:string" />
    </xs:sequence>
</xs:complexType>
</xs:element>
</xs:choice>
</xs:complexType>
<xs:unique msdata:PrimaryKey="true" name="Constraint1">
    <xs:selector xpath="."/>
    <xs:field xpath="mstns:DataID" />
</xs:unique>
</xs:element>
</xs:schema>

```

There are 6 elements:

- ChannelID: the ChannelID of the price
- Date_Time: it is the timestamp of the price. The format of this element is string: "mm/dd/yyyy hh:mm:ss"
- DataValue: it is a float number that contains the price value
- Status: It is a number that describes the DataValue. It is set to 1 for the prices of this project.
- When_Created: it is the date and time when this price value was received on the Infotility servers. The format of this element is string: "mm/dd/yyyy hh:mm:ss"
- Prev_Created: Not used for these prices

Bandwidth Requirements: Depending on the frequency of the RTP price delivery, the bandwidth requirements may vary; however, the data transfer rates are expected to remain low.

5. Server URL

The URL of the server wsdl is:

<http://webservice01.infotility.com/lblwebsrv072803/service1bl.asmx?wsdl>

Note: Infotility is currently implementing https on this server. Https will be activated before 9/1/03. You will get an Email when it is ready. The new URL will be:

<https://webservice01.infotility.com/lblwebsrv072803/service1bl.asmx?wsdl>

Appendix IV. Participants List

Albertsons

Glenn Barrett	Senior Manager / DSM, Albertsons
Scott Moore	Albertsons
Mike Water	Local Store Manager, Albertsons
Ed Lepacek	Senior Energy Coordinator, Albertsons
Paul Sheppard	eLutions / Engage
Tom Pappas	eLutions / Engage
John Kuhl	eLutions / Engage
Jagdish Dudhat	eLutions / Engage
Dean Cromwell	Aztec / Albertsons
Cory Timms	West Valley Electric (sub of Aztec/Albertsons)

Bank of America

Don Rudy	Senior Project Manager, Jones Lang LaSalle
John Schinter	Jones Lang LaSalle
Steven Press	Jones Lang LaSalle
William Young	Assistant Chief Engineer, Jones Lang LaSalle
Kent Anderson	Senior Facility Manager, Jones Lang LaSalle
Dirk Mahling	Chief Technology Officer, Webgen Systems
Bob Landry	Senior Project Manager, Webgen Systems
Glenn Miller	Account Manager, Webgen Systems

GSA Oakland

Edgar Gray	Property Manager, U.S. General Services Administration
John Goins	Property Manager, U.S. General Services Administration
Bud Chisam	U.S. General Services Administration
Stephen May	U.S. General Services Administration
Mark Levi	Building Management Specialist, U.S. General Services Administration

Roche

Jerry Meek	Roche Palo Alto
Jeff Stamp	Facility Manager, Roche Palo Alto
Ken Mason	Yamas Controls, Inc / Tridium

University of California, Santa Barbara

Jim Dewey	Energy Manager, University of California, Santa Barbara
Dale Fong	Chief Technology Officer, Itron (Silicon Energy)

United States Postal Services

Ray Levinson	Pacific Area Environmental Compliance Manager, United States Postal Services
John Samuelson	Building Manager, United States Postal Services
Bill Golove	Staff Research Associate, Lawrence Berkeley National Laboratory

Bruce Dickinson Business Development Manager, CMS Viron Energy Services /
Chevron Energy Services

Infotility

Joseph Desmond President and CEO, Infotility, Inc.

Nicolas Kardas Sr. Director of Product Development, Infotility, Inc.

Appendix V. Site Questionnaires (Test 1, Test 2)

Appendix V-1. Site Questionnaires – Albertsons

Questions for after test 1

Site: Albertson's store 7049

Questioner: David Watson

Questionee: Jagdish Dudhat (Engage Networks)

Date: 11/13/03

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?

(SA) *No*

- b. How did you know?

Did you have any automated alert function or other notification built into your system?

There is no automatic paging/notification system built in. He said that auto notification could be added as a feature, if desired.

- i. How else did you find out?

1. observing a computer
2. observing the HVAC in zones
3. occupant feedback
4. other?

2. Physical Response – (SA)

Did the response strategy work as planned? *Not applicable because he was not aware as described above.*

- i. If so, how do you know?
- ii. If not, any sense why not?

3. Implications of Test–

- a. Were there any operational issues as a results of the test the compromised the building services? *Not applicable.*
- b. Was there any occupant feedback from modified operations?
 - i. Were tenants of customers aware?
 - ii. Any complaints or comfort issues?

4. Any other comments?

Questions for after test 2

Site: Albertson's store 7049

Questioner: David Watson

Questionee: Jagdish Dudhat (Engage Networks)

Date: 11/21/03

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?
(SA) *No*
- b. How did you know?
 - i. Did you have any automated alert function or other notification built into your system? *There is no automatic paging/notification system built in. He said that auto notification could be added as a feature, if desired.*
 - ii. How else did you find out?
 - 1. observing a computer
 - 2. observing the HVAC in zones
 - 3. occupant feedback
 - 4. other?

2. Physical Response – (SA)

Did the response strategy work as planned? *Not applicable because he was not aware as described above.*

- iii. If so, how do you know?
- iv. If not, any sense why not?

3. Implications of Test–

- c. Were there any operational issues as a results of the test the compromised the building services? *Not applicable.*
- d. Was there any occupant feedback from modified operations?
 - i. Were tenants of customers aware?
 - ii. Any complaints or comfort issues?

4. Any other comments?

Appendix V-2. Site Questionnaires – Bank of America

Questions for After Test 1

Questioner: David Watson

Jon Kream (WebGen)

Date: 11/18/2003

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?
(SA) *Yes.*
- b. How did you know?
 - i. Did you have any automated alert function or other notification built into your system? *Yes.*
 - ii. How else did you find out?
 - 1. observing a computer
 - 2. observing the HVAC in zones
 - 3.
 - 4. occupant feedback
 - 5. other?

2. Physical Response – (SA)

- a. Did the response strategy work as planned? *No.*
 - i. If so, how do you know?
 - ii. If not, any sense why not?
Buildings A and C responded but B did not respond. Initially they thought that their signal did not go to Trane. However, after examining Trane trends (provided by LBNL), they realized that the signal went to Trane but Trane did not respond. They ran several tests on the 17th and 18th but were not able to pinpoint a problem. They think that it was an intermittent problem.

3. Implications of Test

- a. Were there any operational issues as a results of the test the compromised the building services? *No.*
- b. Was there any occupant feedback from modified operations?
 - i. Were tenants of customers aware? *No.*
 - ii. Any complaints or comfort issues? *No.*

4. Any other comments?

The response is such that the three buildings A,B, and C work together to minimize the burden on each building. (This was not the plan LBNL, WebGen and BofA came up with—LBNL was expecting response only in B.)

Questions for after test 2

Questioner: David Watson

Questionee: Dirk Mahling (WebGen)

Date: 12/04/2003

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?
(SA) *Yes*
- b. How did you know? *Manual observation. Change of price was observed through visual observation of a browser.*
 - i. How else did you find out?
 1. observing a computer
 2. observing the HVAC in zones
 3. occupant feedback
 4. other?

2. Physical Response – (SA)

- a. Did the response strategy work as planned? *The shed strategy was to rotate reduction in duct static pressure setpoint and fan systems. This worked as planned on this test.*
 - i. If so, how do you know?
 - ii. If not, any sense why not?

3. Implications of Test

- a. Were there any operational issues as a results of the test the compromised the building services?
- b. Was there any occupant feedback from modified operations?
 - i. Were tenants of customers aware? *No.*
 - ii. Any complaints or comfort issues? *No.*

4. Any other comments?

Tasks completed to implement Auto DR:

- 1) *Write Web Services client. Client was written using Microsoft C++ Visual studio.*
- 2) *The price from the client was linked to the existing price input to the neural network agent. Note: this price input is normally linked to ISO streaming prices which are FTP based.*

- *Together, these tasks took about 2-3 days.*
- *Scalability: Since the price input to the neural network is a standard feature at all sites, it is simple to link additional sites to the web services client based price.*
- *Suggestions for improvement: Create a variable price with resolution of \$0.01 or greater.*

Appendix V-3. Site Questionnaires – GSA Oakland

Questions for after test 1

Questioner: David Watson

Questionee: Stephen May

Date: 11/13/2003

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?

(SA) *Yes*

- b. How did you know?

- i. Did you have any automated alert function or other notification built into your system? *Yes. Upon any change of price, an e-mail is sent to: S. May, M. Levi, Susan C, Bill Goodner.*
- ii. How else did you find out?
1. observing a computer
 2. observing the HVAC in zones
 3. occupant feedback
 4. other?

2. Physical Response – (SA)

- a. Did the response strategy work as planned? *No*

- i. If so, how do you know?

- ii. If not, any sense why not?

The last device in the system “upstream” of the EMCS failed. The device that failed was an Alerton VLC controller. It received a command to energize either one or two relays, but the command was never acted upon. The Johnson EMCS is supposed to read the relays and initiate the shed accordingly.

Stephen May alerted Bill Goodner within 15 minutes of the change of price signal and asked him to visually inspect the state of the interface relays. When he said that they were not operating as expected S. May tried forcing the software to control the relays remotely to no avail. They declared the test a failure and disabled the relays. Next, they started to conduct internal testing and evaluation of the system. They are now conducting stress tests of the system. Even though there have been no changes to the system, it appears to be functional at this time. They plan to continue testing and then put the system back in automatic mode by Monday 11/17/03 8:00 AM PDT in preparation for the next LBNL price signal test.

Note: it is admirable that the participants did not physically force the system into a shed mode. The prompt timing of their attention to the system would have made it impossible for us to distinguish between automatic and manual initiation of the shed.

3. Implications of Test

- a. Were there any operational issues as a results of the test the compromised the building services? *Not applicable.*
- b. Was there any occupant feedback from modified operations?
 - i. Were tenants of customers aware?
 - ii. Any complaints or comfort issues?

4. Any other comments?

Questions for after test 2

Questioner: David Watson

Questionee: Stephen May

Date: 11/21/2003

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?
(SA) *Yes*
- b. How did you know?
 - i. Did you have any automated alert function or other notification built into your system? *Yes. Upon any change of price, an e-mail is sent to: S. May, M. Levi, Susan C, Bill Goodner.*
 - ii. How else did you find out?
 - 1. observing a computer
 - 2. observing the HVAC in zones
 - 3. occupant feedback
 - 4. other?

2. Physical Response – (SA)

- a. Did the response strategy work as planned? *The system was verified to have worked correctly all the way up to the interface relays to the Johnson system.*
 - i. If so, how do you know?

Steven May saw over their network that the relays had been commanded. In addition, the status of the relays were visually verified by Building Engineer, Bill Goodner. Verification of the actions that occurred in the Johnson system and the HVAC system were not verified by S. May or B. Goodner.

- ii. If not, any sense why not?

3. Implications of Test

- a. Were there any operational issues as a results of the test the compromised the building services? *Steven May could not provide this information.*

- b. Was there any occupant feedback from modified operations?
 - i. Were tenants or customers aware?
 - ii. Any complaints or comfort issues?

4. Any other comments?

Appendix V-4. Site Questionnaires – Roche

Questions after the test

Questioner: Mary Ann Piette

Questionee: Jerry Meek (Roche)

Date: Test 1: 11/13/2003, Test 2: 11/24/2003

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?

(SA) *Test 1 – Yes*

Test 2 – No

- b. How did you know?

- i. Did you have any automated alert function or other notification built into your system?

Test 1 – Yes. There is an alarm pt and we watched it.

Test 2 – Yes. Alarm on – but no one watched it.

- ii. How else did you find out?

1. observing a computer

Test 1 – Yes. There is an alarm pt and we watched it.

2. observing the HVAC in zones

3. occupant feedback

4. other?

2. Physical Response – (SA)

- a. Did the response strategy work as planned?

- i. If so, how do you know?

Test 1 – Yes. There is an alarm pt and we watched it

Test 2 – Yes, but did not know until email congrats came on Friday, Nov 20.

- ii. If not, any sense why not?

3. Implications of Test–

- a. Were there any operational issues as a results of the test the compromised the building services? *NO both tests*

- b. Was there any occupant feedback from modified operations?

- i. Were tenants of customers aware?

- ii. Any complaints or comfort issues?

NO both tests

4. Any other comments?

Jeff agrees that this could be an automated response to a utility tariff. HE WANTS TO SEE DRAFT PRESS RELEASE TO CLEAR IT.

Appendix V-5. Site Questionnaires – UCSB

Questions for after test 2

Questioner: David Watson

Questionee: Dale Fong (Itron)

Date: 12/02/2003

All of these questions should be asked to on-site staff.

Questions with a SA – should also be asked of the system administrator or vendor

1. Awareness – (SA)

- a. Were you aware that the price changed during the test on Wednesday?
(SA) *Yes*
- b. How did you know? *Manual observation. A real-time price “window” was left open on Dales’ computer screen during the 2 week test period.*

Did you have any automated alert function or other notification built into your system? *There is no automatic paging/notification system built in. He said that auto notification could be added as a feature, if desired.*

- i. How else did you find out?
 - 1. observing a computer
 - 2. observing the HVAC in zones
 - 3. occupant feedback
 - 4. other?

2. Physical Response – (SA)

- a. Did the response strategy work as planned? *Although he did not have direct observation, Dale’s understanding was that the shed strategies worked as planned..*
 - i. If so, how do you know?
 - ii. If not, any sense why not?

3. Implications of Test–

- a. Were there any operational issues as a results of the test the compromised the building services? *No direct observation Not applicable.*
- b. Was there any occupant feedback from modified operations?
 - i. Were tenants of customers aware?
 - ii. Any complaints or comfort issues?

4. Any other comments?

Tasks completed to implement Auto DR:

1) Write Web Services client. Client was written using Borland DELPHI. Task took about 2 days.

2) Itron Universal Calculation Engine. This is where the control logic is implemented. Task took about 3 hours.

- 3) *On site work to the Johnson control system was performed by Jim Dewey. This work is described in the interview notes with Jim Dewey.*

Scalability: Dale said that for a large scale project (i.e. 10,000 + sites) that The Web Services server should “push” the pricing. Otherwise, as in this project, having the sites “pull” the price info is best. The Itron client (hosted locally at UCSB) pulled the Infotility server once per minute.

From the server side, many more sites could be brought on-line very quickly. From the control system side, several days per site would be necessary to add additional buildings or campuses.

Suggestions for improvement: Web Services server should be more stable custom clients are written. Web Services server could be more platform independent. It used Microsoft constructs in the server which made it more difficult to write clients using other development tools. Dale used Borland DELPHI. He spent several extra hours to overcome the Microsoft specific aspects of the server. He said that it would be even more difficult with a Linux or Java based development tool.

Appendix VI. Site Data Collection Points List

Appendix VI-1. Albertsons – Point List

Table VI-1. Albertsons – eLutions Point List

Category	Point Name	Unit	Interval
Current Weather Data	NOAA-CA – Oakland CA	Deg-F	60-minute
Main Electric Meter	Main Electric Meter	kW	15-minute
Start/Stop Loads	Case Lights Start/Stop R-1	Start/Stop	15-minute
	Case Lights Start/Stop R-2	Start/Stop	15-minute
Sub Metered Loads	Anti-Sweat Door Heaters	kW	15-minute
	Case Lights 1	kW	15-minute
	Case Lights 2	kW	15-minute
	Sales Lighting & Misc. (Overhead Lights)	kW	15-minute
XML Device	XML LBNL Device	\$/kWh	15-minute

Appendix VI-2. Bank of America – Point List

Table VI-2. BofA – WebGen Point List

Fans	Point Name	Unit	Interval
SF-1,2	BMS Static Pressure Setpoint	IWC	15-minute
	BMS Supply Air Setpoint	Deg-F	15-minute
	Building Static Pressure	IWC	15-minute
	Economizer Position	%	15-minute
	Flow SCHW	GPM	15-minute
	Return Capacity in CFM	CFM	15-minute
	Return Fan Status	On/Off	15-minute
	Space Temp	Deg-F	15-minute
	Speed Reset Override	%	15-minute
	Speed SF VFD	%	15-minute
	Static Pressure	IWC	15-minute
	Supply Air Temp Override	Deg-F	15-minute
	Supply Air Temp Read	Deg-F	15-minute
	Supply Air Temp Reset	Deg-F	15-minute
	Supply Capacity in CFM	CFM	15-minute
	Supply Fan Status	On/Off	15-minute
	Temp Avg Zone 2	Deg-F	15-minute
	Temp Avg Zone 3	Deg-F	15-minute
	Temp Avg Zone 4	Deg-F	15-minute
	Temp Avg Zone 5	Deg-F	15-minute
	Temp Avg Zone 6	Deg-F	15-minute
	Temp Avg Zone 7	Deg-F	15-minute
	Temp Avg Zone 8	Deg-F	15-minute
	Temp MA	Deg-F	15-minute
	Temp OA	Deg-F	15-minute
	Temp RA	Deg-F	15-minute

SF-3,4	WebGen Economizer Position Control Enable	%	15-minute
	WebGen Economizer Position Control	%	15-minute
	WebGen Static Pressure Reset Enable	IWC	15-minute
	WebGen Static Pressure Reset	IWC	15-minute
	Building Static Pressure	IWC	15-minute
	Economizer Position	%	15-minute
	Flow SCHW	GPM	15-minute
	Return Capacity in CFM	CFM	15-minute
	Return Fan Status	On/Off	15-minute
	Speed RF VFD	%	15-minute
	Speed SF VFD	%	15-minute
	Static Pressure	IWC	15-minute
	Supply Air Temp Read	Deg-F	15-minute
	Supply Capacity in CFM	CFM	15-minute
	Supply Fan Status	On/Off	15-minute
	Temp MA	Deg-F	15-minute
	Temp RA	Deg-F	15-minute

Table VI-3. BofA – Trane System Point List

Category	Point Name	Unit	Interval
Cooling Energy	Building A CHW Supply	Tons	15-minute
	Building B CHW Supply	Tons	15-minute
	Building C CHW Supply	Tons	15-minute
	Building D CHW Supply	Tons	15-minute
	Building D Chiller Total	Tons	15-minute
WebGen Control	Bldg A - Duct Static Pressure Setpoint Reset Control	WebGen/Trane	15-minute
	Bldg A - Temp Setpoint Reset Control	WebGen/Trane	15-minute
	Bldg A - VFD Lock Control	Locked/Unlocked	15-minute
	Bldg B - Duct Static Pressure Setpoint Reset Control	WebGen/Trane	15-minute
	Bldg B - Temp Setpoint Reset Control	WebGen/Trane	15-minute
	Bldg B - VFD Lock Control	Locked/Unlocked	15-minute
	Bldg C - Duct Static Pressure Setpoint Reset Control	WebGen/Trane	15-minute
	Bldg C - Temp Setpoint Reset Control	WebGen/Trane	15-minute
	Bldg C - VFD Lock Control	Locked/Unlocked	15-minute

Table VI-4. B of A – Submeter Point List

File Name	Data Category	Unit	Interval
EMCC	MCC Phase A amps	Amps	1-minute
	MCC Phase B amps	Amps	1-minute
	MCC Phase C amps	Amps	1-minute
	MCC Average amps	Amps	1-minute
	MCC kva	kWh	1-minute
	MCC Total kW	kW	1-minute
	MCC Phase A kW	kW	1-minute
	MCC Phase B kW	kW	1-minute
	MCC Phase C kW	kW	1-minute

	MCC Average kW	kW	1-minute
	MCC kWh	kWh	1-minute
	MCC kW Max reached	kW	1-minute
	MCC kW Min reached	kW	1-minute
	MCC Power Factor	PF	1-minute
	MCC Phase A power factor	PF	1-minute
	MCC Phase B power factor	PF	1-minute
	MCC Phase C power factor	PF	1-minute
	MCC Phase A to B Phase volts	VAC	1-minute
	MCC Phase A to C Phase volts	VAC	1-minute
	MCC Phase C to B Phase volts	VAC	1-minute
	MCC Phase line to line volts	VAC	1-minute
Amps EMCC	Exhaust Fan 3 VFD&Motor Amps	Amps	1-minute
	Exhaust Fan 4 VFD&Motor Amps	Amps	1-minute
	Supply Fan 3 VFD&Motor Amps	Amps	1-minute
	Supply Fan 4 VFD&Motor Amps	Amps	1-minute
	Exhaust Fan 1 VFD&Motor Amps	Amps	1-minute
	Exhaust Fan 2 VFD&Motor Amps	Amps	1-minute
	Supply Fan 1 VFD&Motor Amps	Amps	1-minute
	Supply Fan 2 VFD&Motor Amps	Amps	1-minute
MCC Amps	MCC Amps Value	Amps	1-minute
B2PWR	Building B – Power	kW	1-minute

Appendix VI-3. GSA Oakland – Point List

Table VI-5. GSA Oakland – InterAct Point List

Meter #	Description	Unit	Interval
Meter-1	North tower lighting	kWh	15-minute
Meter-2	South tower basement lighting	kWh	15-minute
Meter-3	North tower mechanical room, cooling tower	kWh	15-minute
Meter-4	Central plant	kWh	15-minute
Meter-5	South tower mechanical room, auditorium	kWh	15-minute

Table VI-6. GSA Oakland – EMCS Point List

Data points used for or relevant to the saving analysis

Location/Equipment	Point Description	Unit	Interval
Zone Temperature			
North Tower			
17th floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
16th floor (5 zones)	zone temperature (monitored)	Deg-F	5 min
	zone temperature setpoint	Deg-F	5 min
	VAV box damper position	%	5 min
	airflow (monitored)	CFM	5 min
	airflow setpoint	CFM	5 min
12th floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
6th floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
4th floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
	zone temperature setpoint	Deg-F	5 min

	VAV box damper position	%	5 min
	airflow (monitored)	CFM	5 min
	airflow setpoint	CFM	5 min
2nd floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
South Tower			
16th floor (5 zones)	zone temperature (monitored)	Deg-F	5 min
	zone temperature setpoint	Deg-F	5 min
	VAV box damper position	%	5 min
	airflow (monitored)	CFM	5 min
	airflow setpoint	CFM	5 min
4th floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
	zone temperature setpoint	Deg-F	5 min
	VAV box damper position	%	5 min
	airflow (monitored)	CFM	5 min
	airflow setpoint	CFM	5 min
2nd floor (4 zones)	zone temperature (monitored)	Deg-F	5 min
Cooling Plant			
Chiller CH-1~5 (5 units)	chiller power	kW	5 min
	chiller status	on/off	5 min
	CHWS temperature (monitored)	Deg-F	5~15 min
	CHWS temperature setpoint	Deg-F	5~15 min
	CHWR temperature	Deg-F	5~15 min
	CHW flow	GPM	5~15 min
	CHW cooling energy	Btu/h	5~15 min
	Chiller load		
CHW Pump CHP-1~5 (5 units)	Primary pump status	on/off	5 min
	Secondary pump status	on/off	5 min
	Secondary pump VFD speed	%	5 min
CW Pump CP-1~5 (5 units)	CW pump status	on/off	5 min
Cooling tower (4 units)	fan status	on/off	5 min
	Fan VFD (CT-1D only)	%	5 min
Fan System			
North tower			
5th floor (2 cold deck fans, 1 hot deck fans, 2 return fans)	Fan status	on/off	5 min
	Fan VFD	%	5 min
	Cooling valve position	%	5 min
	Heating valve position	%	5 min
	Differential pressure	IWC	5 min
	Supply air temperature	Deg-F	5 min
	Mixed air temperature	Deg-F	5 min
	Return air temperature	Deg-F	5 min
	Static pressure	Deg-F	5 min
Penthouse (2 cold deck fans, 2 hot deck fans, 2 return fans)	Fan status	on/off	5 min
	Fan VFD	%	5 min
	Cooling valve position	%	5 min
	Heating valve position	%	5 min
	Differential pressure	IWC	5 min

	Supply air temperature	Deg-F	5 min
	Mixed air temperature	Deg-F	5 min
	Return air temperature	Deg-F	5 min
	Static pressure	Deg-F	5 min
South tower			
5th floor (2 cold deck fans, 1 hot deck fans, 2 return fans)	Fan status	on/off	5 min
	Fan VFD	%	5 min
	Cooling valve position	%	5 min
	Heating valve position	%	5 min
	Differential pressure	IWC	5 min
	Supply air temperature	Deg-F	5 min
	Mixed air temperature	Deg-F	5 min
	Return air temperature	Deg-F	5 min
	Static pressure	Deg-F	5 min
Penthouse (2 cold deck fans, 2 hot deck fans, 2 return fans)	Fan status	on/off	5 min
	Fan VFD	%	5 min
	Cooling valve position	%	5 min
	Heating valve position	%	5 min
	Differential pressure	IWC	5 min
	Supply air temperature	Deg-F	5 min
	Mixed air temperature	Deg-F	5 min
	Return air temperature	Deg-F	5 min
	Static pressure	Deg-F	5 min

Table VI-7. GSA Oakland – Submeter Point List

Equipment	Description	Interval
CHP-NB-6	Secondary chilled water pump with VFD	1-minute
CHP-NB-8	Secondary chilled water pump with VFD	1-minute
SF-SP-1	South tower penthouse cold deck fan	1-minute
SF-SP-2	South tower penthouse cold deck fan	1-minute
SF-S5-1	South tower 5th floor cold deck fan	1-minute
SF-S5-2	South tower 5th floor cold deck fan	1-minute

Trend data are 3 phases and average of kW, Amps, Power Factor and Volt.

Appendix VI-4. Roche – Point List and Fan Spot Measurement Plan

Table VI-8. Roche – PML PegaSys Point List

Point Name	Unit	Interval
Building A2 – Whole Building Power	kW	15-minute
Building SS – Whole Building Power	kW	15-minute
Building FS – Whole Building Power	kW	15-minute

Table VI-9. Roche – Real-Time Energy Tracker Point List

Category	Point Name	Unit	Interval
Logical Status	A2 Fan-2 Status	Start/Stop	5-minute
	A2 Fan-4 Status	Start/Stop	5-minute
	A2 Fan-6 Status	Start/Stop	5-minute
	FS Supply Fan-1 Status	Start/Stop	5-minute
	FS Supply Fan-2 Status	Start/Stop	5-minute
	FS Return Fan-1 Status	Start/Stop	5-minute
	SS AH-04 Status	Start/Stop	5-minute
Price Signal	Equipment Status 10 Cents Plan	\$/kWh	5-minute
	Equipment Status 30 Cents Plan	\$/kWh	5-minute
	Equipment Status 75 Cents Plan	\$/kWh	5-minute
Temperature	A2 SF-1,2 OSA Temperature	Deg-F	5-minute
	A2 SF-3,4 OSA Temperature	Deg-F	5-minute
	A2 SF-5,6 OSA Temperature	Deg-F	5-minute
	A2 SF-1,2 Zone Temperature	Deg-F	5-minute
	A2 SF-3,4 Zone Temperature	Deg-F	5-minute
	A2 SF-5,6 Zone Temperature	Deg-F	5-minute
CO ₂	A2 SF-1,2 CO ₂ Concentration	ppm	5-minute
	A2 SF-3,4 CO ₂ Concentration	ppm	5-minute
	A2 SF-5,6 CO ₂ Concentration	ppm	5-minute

Roche – Fan M&V Spot Measurement Plan (by Kris Kinney)

PML - Roche is going to generate a service call with PML to have the database and time stamp reviewed and brought into current. We need to follow up on that so we can make sure that any current data is captured before the rework. More important is to determine the exact offset for the data files. There was no schedule determined on when this would be done.

Building schedules:

SS - Site services - Start 7 a.m. to 6 pm

FS - Food Services - Starts 4:30 a.m. to 5 pm

A2 - Office building - Starts 6 a.m. to 6 pm

SS Building**SS AH4**

Thursday 09/30/03 13:38 hours - measurement taken at MCC.

Supply Fans have power factor correction capacitors. Exhaust fans did not. 5 to 7.5 kW, 480 to 490 volts, power factor (PF) 0.51, Around 30 HP motor.

SS EF

482 to 491 volts, 1380 to 1480 watts - Measurement take at disconnect at fan. Around 15 HP motor.

FS Building

Measurements taken on 10/15/03 at 11:00 a.m. - both fans running.

Supply Fans have power factor correction capacitors. Exhaust did not.

FSSF01 Fan 4S-1

Voltage 510V, 12.3 to 12.5 kW, PF = .87, no vfd control, Around 25 HP.

FSSF02 Fan 4S-2

Voltage 500 to 507V, 12.8 kW, PF = .78, no vfd control, Around 25 HP.

Common exhaust Fan FE-1

Volts = 500, 5.4 kW, PF = 0.58

This fan is not interlocked with the two supply fans. Independently controlled.

FSSF01 fan in solo without FSSF02

500V, 8 to 9.1 kW, Exhaust was almost the same.

A2 Building

Taken on 10/15/03 from 1 to 2 pm. Each section was done within 10 to 15 minutes.

Section 1 of three

Identical fan sections installed over three wings.

Supply and return are interlocked. Section 3 only had one exhaust fan.

Supply fans had power factor correction and exhaust did not. No vfds for control.

	kW	PF	Volts
Fan 3S-3 (A2SF03)	24.2-25.1 kW	0.66	490-496 V
Fan 3S-4 (A2SF04)	27.8-28.95 kW	0.67	490V
Fan 3E-3 (A2RA03)	6.5 kW	0.78	490V
Fan 3E-4 (A2RA04)	4.88-4.92 kW	0.55	493-500 V
Fan 3S-3 (A2SF03) ran in solo	29.88 kW	0.83	495 V
Fan 3E-3 (A2SF04) ran in solo	7 kW	0.84	495V

Section 2 of three

Identical fan sections installed over three wings. Supply and return are interlocked. Section 3 only had one exhaust fan. Supply fans had power factor correction and exhaust did not. No VFDs for control.

	kW	PF	Volts
Fan 3S-1 (A2SF01)	18.4 kW	0.77	495 V
Fan 3S-2 (A2SF02)	21.8kW	0.81	495 V
Fan 3E-1 (A2RA01)	4 kW	0.50	491 V
Fan 3E-2 (A2RA02)	4.36 kW	0.50	495 V
Fan 3S-1 (A2SF01) ran in solo	20.9 kW	0.79	495 V
Fan 3E-1 (A2RA01) ran in solo	4.4 kW	0.51	499 V

Section 3 of three

Identical fan sections installed over three wings. Supply and return at not interlocked. Supply fans had power factor correction and exhaust did not. No VFDs for control.

	kW	PF	Volts
Fan 3S-5 (A2SF05)	21 kW	0.79	494 V
Fan 3S-6 (A2SF06)	19.2 kW	0.83	497 V
Fan 3E-5 (A2RA05)	5.2 kW	0.56	497 V
Fan 3S-5 (A2SF05) ran in solo	20.6 kW	0.79	494 V
Fan 3E-5 (A2RA05) ran in solo	5.1 kW	0.56	497 V

Appendix VI-5. UCSB – Shed Strategies and Point List

Table VI-10. UCSB – Shed Strategies Summary

System	Supply to	Point	DRP description	DRP reduction		
				Level-1	Level-2	Level-3
				Command	Command	Command
525-2S1	Library II S/E	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	70% 100%	60% 100%	60% 0% 0% 100%
525-2S2	Library II N/E	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	70% 100%	60% 100%	60% 0% 0% 100%
525-2S3	Library II N/Center	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	70% 100%	60% 100%	60% 0% 0% 100%
525-2S4	Library II S/Center	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	70% 100%	60% 100%	60% 0% 0% 100%
525-2S5	Library II W/LS	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	70% 100%	60% 100%	60% 0% 0% 100%
525-3S1	Library III 4-7F West	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	 	 	0% 0% 100%
525-3S2	Library III 1-3F West	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	70% 100%	60% 100%	60% 0% 0% 100%
525-3S3	8F	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	 	 	
525-3S4	Library III 4-7F East	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	 	 	0% 0% 100%
525-3S5	Library III 1-3F East	SF-CMD C-VLV-C H-VLV-C E-DPR-C	Supply Fan VFD Command Cooling Valve Position Heating Valve Position Economizer % OSA	 	 	
525-4S1	Library IV West (large open space)	SP-SET C-VLV-C DPR-C	Static Set (.6 IWC) 525-2S1C Cooling Valve Position Economizer % OSA	 	0.4 100%	0.4 0% 100%
525-4S2	Library IV East (large open space)	SP-SET C-VLV-C DPR-C	Static Set (.6 IWC) 525-2S2C Cooling Valve Position Economizer % OSA	 	0.4 100%	0.4 0% 100%
525-4S3	Library IV W-peri	C-VLV-C H-VLV-C	Cooling Valve Position Heating Valve Position	 	 	0% 0%
525-4S4	Library IV S-peri	SF-CMD H-VLV-C	Cooling Valve Position Heating Valve Position	 	 	0% 0%
525-4S5	Library IV E-peri	SF-CMD H-VLV-C	Cooling Valve Position Heating Valve Position	 	 	0% 0%

Table VI-11. UCSB – EEM Suite Point Summary

Fan Trend																				
Interval		15-minute																5-minute		
Point Category		Cold Deck Temperature	Cooling Valve Command	Discharge Air Static Press	Discharge Air Temperature	Economizer % OSA	Heating Valve Command	Hot Deck Temperature	Return Air Temperature	Return Fan Amps	Return Fan kW	Return Inlet Vane Command	Return VFD Command	Supply Fan Amps	Supply Fan kW	Supply VFD Command	Zone Temperature	Cooling Valve Command	Heating Valve Command	Supply VFD Command
Library II	S-1 Fan	1	1			1	1	1	1	1					1	1		1	1	1
	S-2 Fan	1	1			1	1	1		1					1	1	1	1	1	1
	S-3 Fan	1	1			1	1	1		1					1	1	1	1	1	1
	S-4 Fan	1	1			1	1	1		1					1	1	2			1
	S-5 Fan	1	1			1	1	1		1					1	1	2			1
Library III	S-1 Fan	1	1			1	1	1									2	1		
	S-2 Fan	1	1			1	1	1	1	1						1	2	1	1	1
	S-3 Fan	1	1			1	1	1			1		1		1	1	2			
	S-4 Fan	1	1			1	1	1		1				1			1			
	S-5 Fan	1	1			1	1	1			1		1		1	1	2			
Library IV	S-1 Fan		1	1	1	1				1		1			1	1	1	1		
	S-2 Fan		1	1	1	1				1		1			1	1	2	1		
	S-3 Fan		1		1		1							1			1	1		
	S-4 Fan		1		1		1							1			1	1		
	S-5 Fan		1		1		1							1			1	1		
Total		10	15	2	5	12	13	10	2	9	2	2	2	4	9	10	21	10	4	6

Utility Trend		
Library II	Library II Electrical Demand	15-minute
	Library 3 Gas Meter	15-minute
Library III	Library III Electrical Demand 1 FI	15-minute
	Library III Electrical Demand 8 FI	15-minute
	Library IV Electrical Demand	15-minute
Library Main	Library Chilled Water Use kW	15-minute
	Library Main Total	15-minute

Chiller Trend	Chilled Water Use	15-minute
	Chiller Plant kW	15-minute
	Chiller Tons	15-minute
	Chilled Water Return Temp	15-minute
	Chilled Water Supply Temp	15-minute
	Chiller 2 Electrical Demand	15-minute
	Chiller 2 Run Status	15-minute
	Chiller Full Load Amps	15-minute
	Condenser Water Return Temp	15-minute
	Condenser Water Supply Temp	15-minute

Appendix VII. Additional Result Tables and Figures

Appendix VII-1. First Day Test Results

We analyzed the first day test by the whole-building method. Table VIII-1 shows the demand savings for each fifteen minute time period derived using the whole-building method. Since GSA participation failed for the first day test, the other four sites are described here. The maximum aggregated savings was 260 kW. These savings were 11% of total 2191 kW demand and 0.30 W/ ft². Roche achieved the largest demand saving percentage among the four sites (23%), followed by Albertsons (maximum 16% of demand saving) and UCSB (maximum 11% of demand saving). Demand saving was not identified for Bank of America for this test.

Three sites out of four failed some of their shed strategies. Roche achieved all the shed strategies planned. Albertsons failed one of two strategies. UCSB failed one in three strategies. Based on the equipment trend data, Bank of America failed one of one strategy.

Table VII-12. Summary of Estimated Savings of 1st Day (Whole-Building Method)

Time	from	13:00	13:15	13:30	13:45	14:00	14:15	14:30	14:45	15:00	15:15	15:30	15:45	16:00	16:15	16:30	16:45	16:55
	to	13:15	13:30	13:45	14:00	14:15	14:30	14:45	15:00	15:15	15:30	15:45	16:00	16:15	16:30	16:45	17:00	
Price signal	\$/kW	0.10																0.10
Albertsons	WBP kW	311	294	305	311	300	302	299	309	303	288	315	327	305	312	314	327	
	Shed kW	37	53	54	52	54	42	48	51	51	54	33	36	50	39	38	34	
	WBP shed %	11%	15%	15%	14%	15%	12%	14%	14%	14%	16%	10%	10%	14%	11%	11%	9%	
	Shed W/spft	0.73	1.05	1.09	1.04	1.08	0.84	0.96	1.02	1.02	1.07	0.67	0.72	1.01	0.79	0.77	0.67	
Bank of America	WBP kW	735	744	734	733	735	731	741	724	730	760	729	720	701	693	680	663	
	Shed kW	-13	-16	-8	-2	-4	-8	-19	-5	-10	-42	-11	-12	-1	0	1	0	
	WBP shed %	-2%	-2%	-1%	0%	-1%	-1%	-3%	-1%	-1%	-6%	-2%	-2%	0%	0%	0%	0%	
	Shed W/spft	-0.06	-0.08	-0.04	-0.01	-0.02	-0.04	-0.09	-0.03	-0.05	-0.20	-0.05	-0.05	-0.01	0.00	0.01	0.00	
Roche	WBP kW	702	662	568	639	551	585	464	455	452	447	439	431	424	577	464	459	
	Shed kW	-31	9	79	1	73	27	123	131	131	129	130	123	124	-34	26	19	
	WBP shed %	-5%	1%	12%	0%	12%	4%	21%	22%	22%	22%	23%	22%	23%	-6%	5%	4%	
	Shed W/spft	-0.16	0.05	0.41	0.01	0.38	0.14	0.64	0.68	0.68	0.67	0.68	0.64	0.64	-0.18	0.14	0.10	
UCSB	WBP kW	779	797	794	801	786	798	807	703	706	706	697	712	716	866	775	744	
	Shed kW	22	3	2	-7	3	-6	-19	83	66	77	84	60	61	-72	4	35	
	WBP shed %	3%	0%	0%	-1%	0%	-1%	-2%	11%	9%	10%	11%	8%	8%	-9%	1%	4%	
	Shed W/spft	0.08	0.01	0.01	-0.02	0.01	-0.02	-0.06	0.29	0.23	0.26	0.29	0.21	0.21	-0.25	0.01	0.12	
Total	WBP kW	2527	2497	2400	2483	2371	2416	2311	2191	2191	2201	2180	2191	2145	2448	2232	2193	
	Shed kW	15	48	127	44	126	56	133	260	238	217	236	207	234	-67	71	87	
	WBP shed %	1%	2%	5%	2%	5%	2%	5%	11%	10%	9%	10%	9%	10%	-3%	3%	4%	
	Shed W/spft	0.02	0.06	0.17	0.06	0.17	0.08	0.18	0.35	0.32	0.29	0.32	0.28	0.31	-0.09	0.10	0.12	

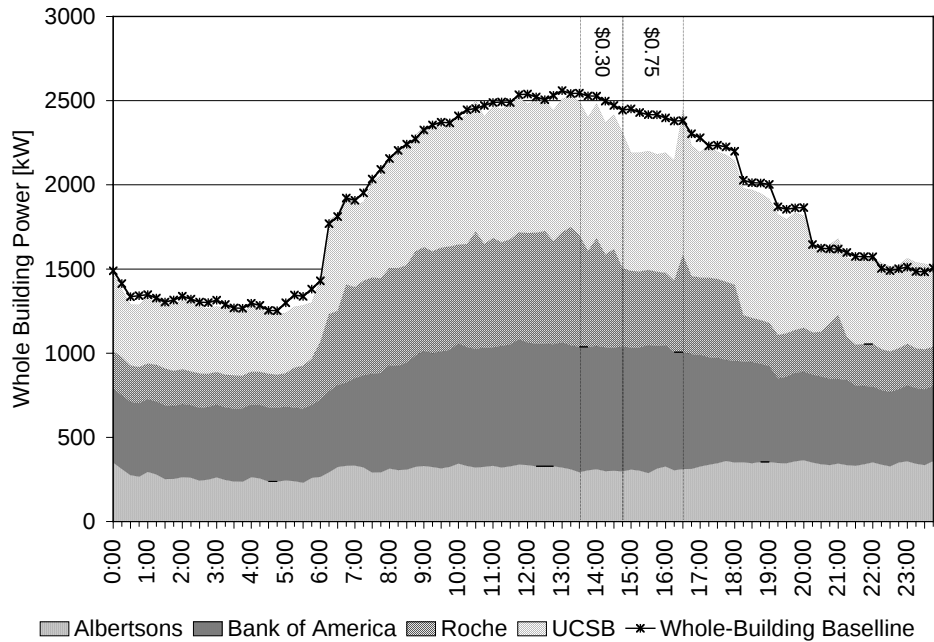


Figure VII-2. Summary of All Sites (1st Day)

Albertsons implemented only their overhead light shed for the first day test. Although the whole-building method indicates maximum 54 kW of savings, the component level analysis shows 26 kW of savings in the overhead light. The EIS was programmed to disable the shed (stop polling the signal) at 3:30 pm due to the client's request. The shed was disabled at 3:30 pm, and the overhead lights came back on. However, the shed activated again at 4:00 pm, and lasted until the end of the high price signal (the cause hasn't been identified). The disable program was removed for the second day test.

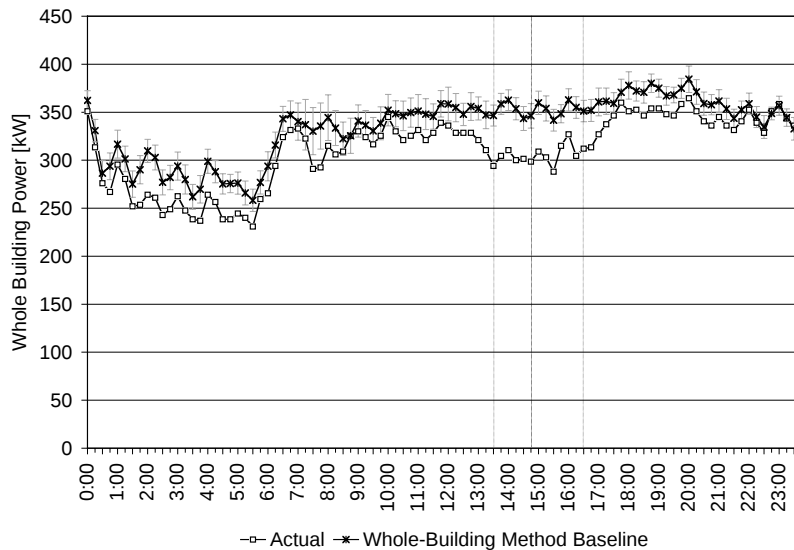


Figure VII-3. Albertsons – Whole Building Power and Baseline (1st Day)

Bank of America didn't show any noticeable saving. WebGen trend didn't show any changes in the static pressure either.

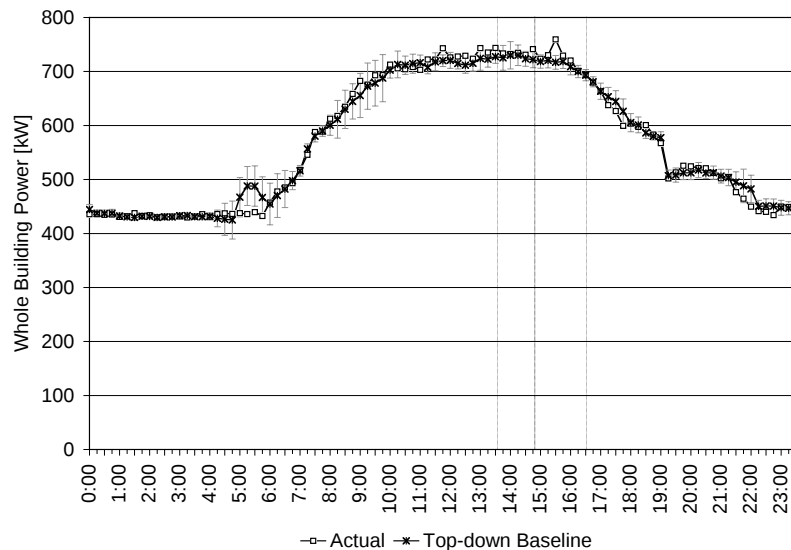


Figure VII-4. B of A – Whole Building Power and Baseline (1st Day)

Roche achieved a complete set of the shed strategies. Though the savings during the \$0.30/kWh period is not clear because of the cafeteria's inconsistent load, the Building A2 individual building power trend clearly showed 85 kW of demand saving. During the \$0.75/kWh period, Roche achieved approximately 130 kW of demand saving. The electricity demand spiked at the end of shed period, probably because of release of the equipment operations.

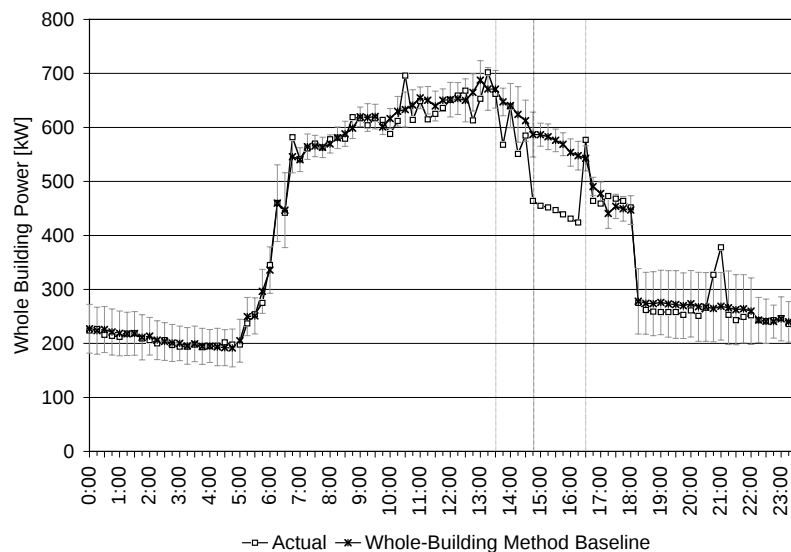


Figure VII-5. Roche – Whole Building Power and Baseline (1st Day)

UCSB failed to operate the fan VFD limit strategy. Therefore, no fan VFD-related savings could be identified during the \$0.30/kWh period. UCSB succeeded with the cooling valve shed, and the whole-building method indicates a maximum savings of 84 kW. Because of release of the cooling valve, the cooling power spiked after the shed period.

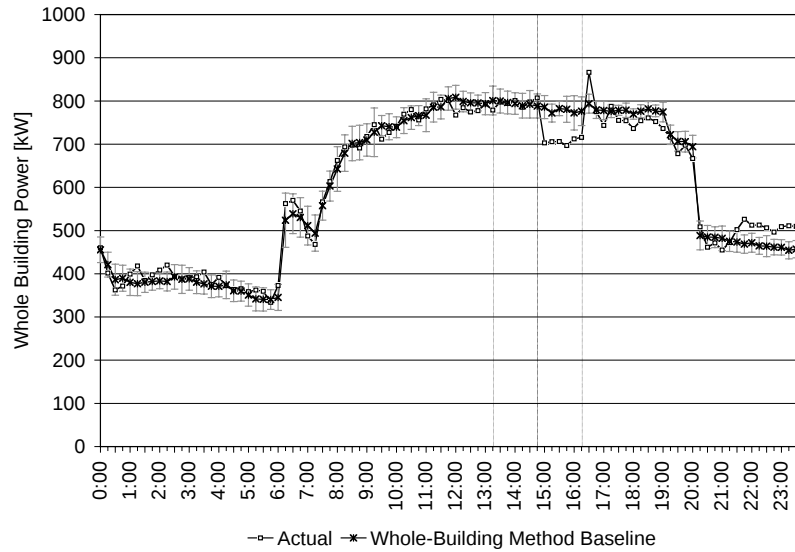


Figure VII-6. UCSB – Whole Building Power and Baseline (1st Day)

Appendix VII-2. B of A – Result Analysis by WebGen

WebGen’s analysts independently calculated the demand savings at the B of A site using their own method. According to their calculations, Building B achieved maximum savings of 26.4 kW, and the maximum demand saving for the whole site (including the four buildings) was 199 kW (23% of the whole building power). The average demand savings for the whole site during the shed period was 8.3 %. The WebGen’s agents rotated the static pressure reset strategy across the three buildings to minimize the shed impact. The shed rotation can be clearly seen in Table VIII-3.

Table VII-13. B of A – Duct Static Pressure Change

Time	Bldg A	Bldg B	Bldg C	Min SP
12:45	2.21	2.20	2.18	2.18
13:00	1.95	2.19	2.19	1.95
13:15	2.29	2.19	2.23	2.19
13:30	2.17	1.98	2.25	1.98
13:45	1.65	1.99	2.23	1.65
14:00	1.88	2.20	2.22	1.88
14:15	2.15	2.22	2.20	2.15
14:30	2.25	2.01	2.17	2.01
14:45	2.03	2.20	2.16	2.03
15:00	1.85	2.19	2.15	1.85
15:15	2.24	2.20	1.74	1.74
15:30	2.37	2.00	2.19	2.00
15:45	2.41	1.98	2.25	1.98
16:00	1.99	2.19	2.25	1.99
16:15	2.09	2.20	2.08	2.08
16:30	2.37	2.22	2.24	2.22
16:45	2.41	2.19	2.20	2.19
17:45	2.41	2.20	2.19	2.19
18:45	2.38	2.21	2.21	2.21

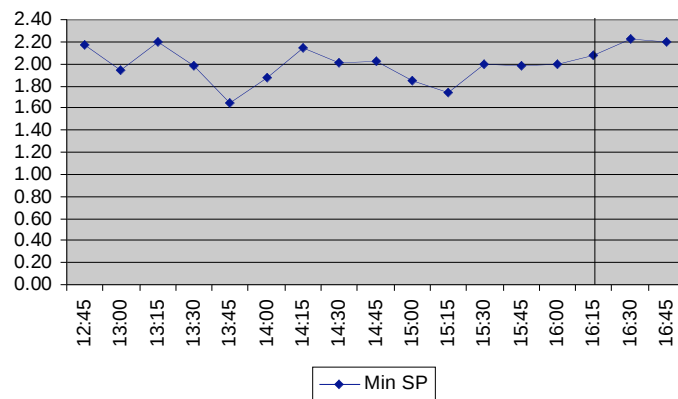


Figure VII-7. B of A – Duct Static Pressure

Table VII-14. B of A – Whole Building Power Saving Estimates by WebGen

Time	Δ kW			Sum Δ kW	% of Mtr
	Bldg A	Bldg B	Bldg C		
12:45	0.00	0.19	2.99	3.18	0.7%
13:00	46.77	1.69	1.97	50.44	9.8%
13:15	0.00	1.04	0.00	1.04	0.2%
13:30	6.22	26.40	0.00	32.62	6.3%
13:45	94.09	25.18	0.00	119.27	23.1%
14:00	57.82	0.22	0.00	58.04	11.3%
14:15	10.53	0.00	0.69	11.22	2.2%
14:30	0.00	23.26	4.10	27.36	5.3%
14:45	27.38	0.00	5.43	32.81	7.6%
15:00	44.68	0.85	5.60	51.13	14.0%
15:15	0.00	0.38	49.22	49.60	11.9%
15:30	0.00	19.30	0.66	19.97	4.9%
15:45	0.00	18.60	0.00	18.60	5.0%
16:00	20.30	0.88	0.00	21.19	7.9%
16:15	10.82	0.05	9.12	20.00	7.4%
16:30	0.00	0.00	0.00	0.00	0.0%
16:45	0.00	0.36	0.00	0.36	0.1%
17:45	0.00	0.00	0.66	0.66	0.3%
18:45	0.00	0.00	0.00	0.00	0.0%
			Average	36.66	8.3%

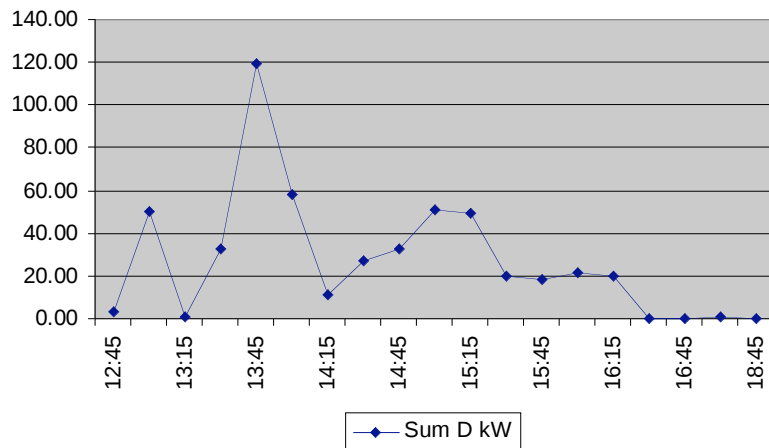


Figure VII-8. B of A – Whole Building Power Saving Estimates by WebGen

Appendix VII-3. GSA – Additional Figures

Individual Component Power and Baseline

Baseline demand for the controllable components were calculated by using the OAT regression method. Because of the “tower free cooling” strategy, the chillers and the related equipment operation show irregular daily load shapes. Chiller demand increased during the first \$0.30/kWh period, and dropped down at the beginning of the \$0.75/kWh period (Figure VIII-8).

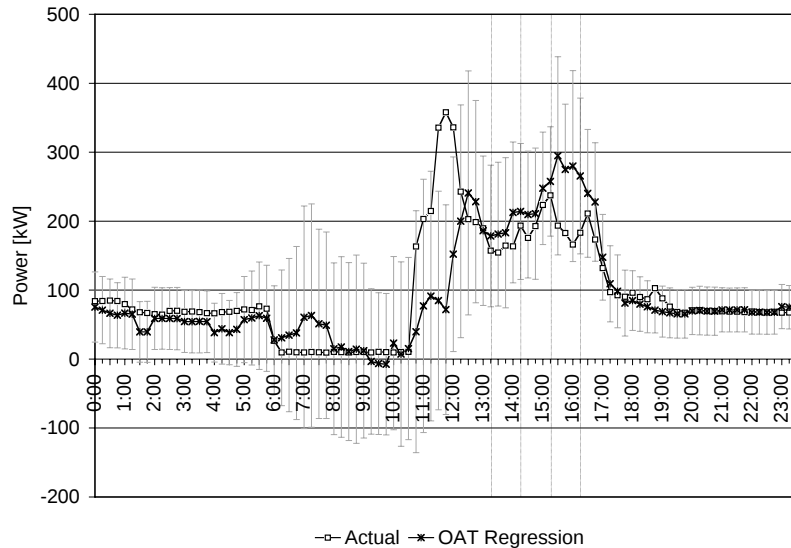


Figure VII-9. GSA – Chiller Power and OAT Regression Model

Fan power shows the demand reduction clearly during the shed. The OAT regression model seems higher than the actual demand (Figure VIII-9).

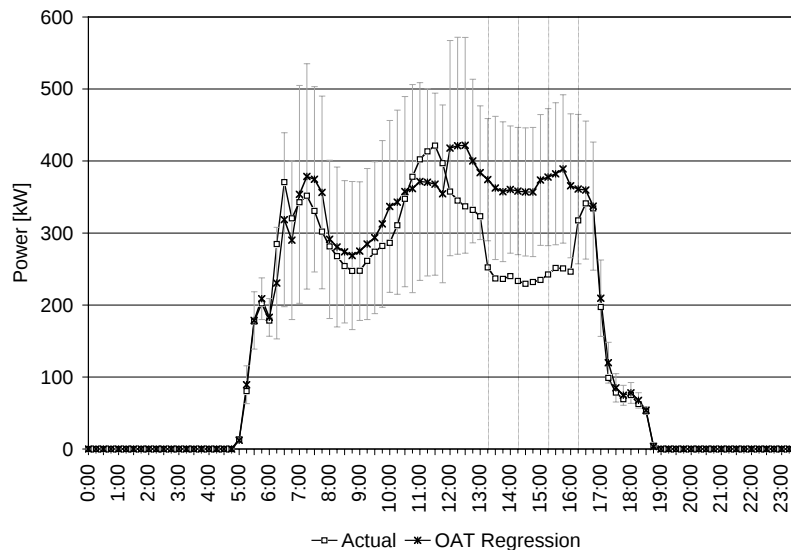


Figure VII-10. GSA – Fan Power and OAT Regression Model

The pump power showed a demand spike at the end of the \$0.75/kWh period, due to the start-up of the chillers (Figure VIII-10).



Figure VII-11. GSA – Pump Power and OAT Regression Model

No obvious demand savings could be identified for the cooling tower (Figure VIII-11).

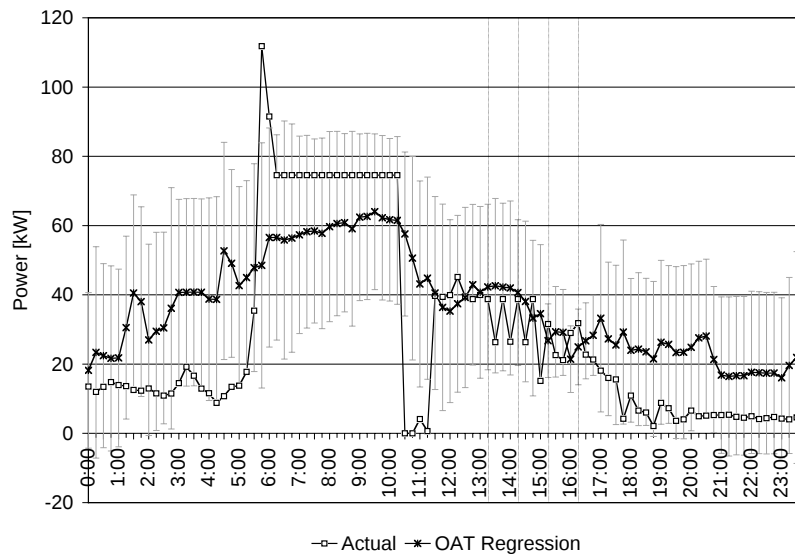


Figure VII-12. GSA – Cooling Tower Power and OAT Regression Model

The pump power spiked at 3:00 pm due to the chiller staging-up (Figure VIII-12).

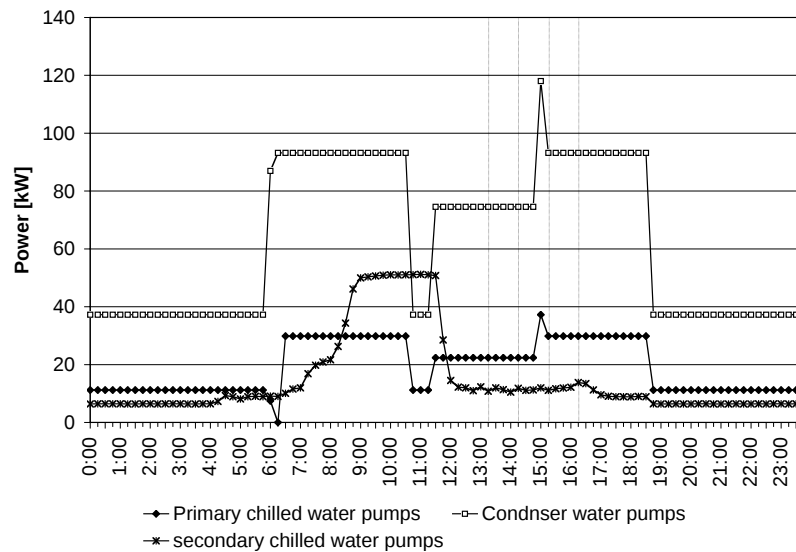


Figure VII-13. GSA – Pump Power

Zone Temperatures by Floor

Zone temperatures were collected on nine floors. Each floor has four to five zones (see point list at Appendix IV). The zone temperature trends for each floor are presented in the following charts (Figures V111-13 through VIII-21). As a general trend, the west facing zone's temperatures rose in the afternoon regardless of the setpoint increase. The North 2nd floor zone temperature didn't show any obvious changes. Zone 2B1 was in heating mode during the test (Figure VIII-13).

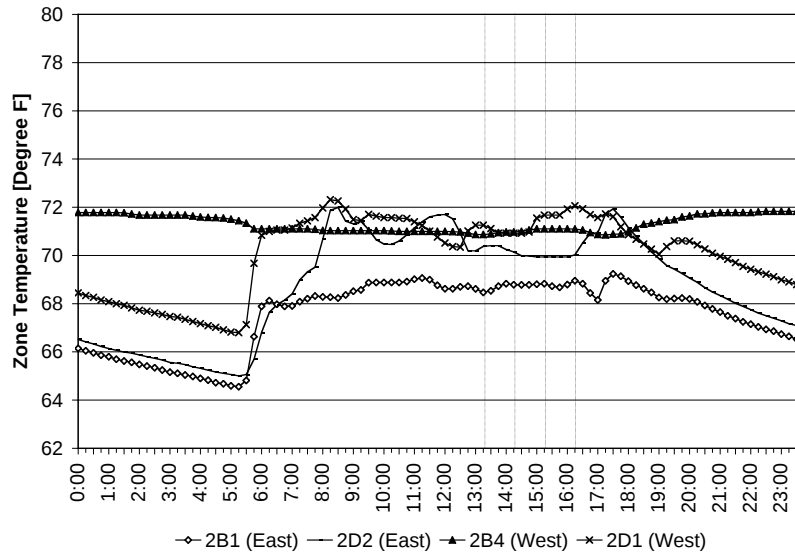


Figure VII-14. GSA – North Tower 2nd Floor Zone Temperature

For the North 4th floor (Figure VIII-14), the zone temperature for the west-facing zone (4D3) increased during the test, possibly because of solar gain. No significant temperature changes were found in the rest of the North 4th floor zones.

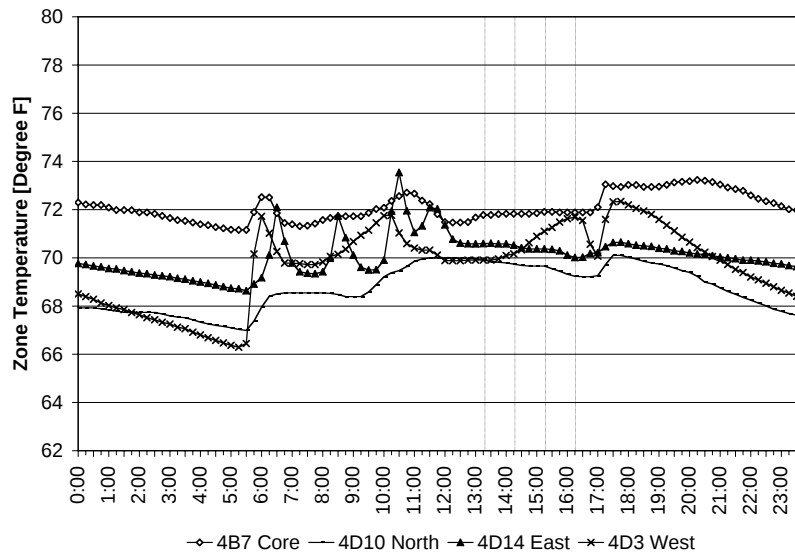


Figure VII-15. GSA – North Tower 4th Floor Zone Temperature

For the North 6th floor (Figure VIII-15), the 6D1 zone temperature dropped during the shed. However, the range of temperatures observed were not around the heating setting point. We are not sure whether the zone was in heating mode or cooling mode.

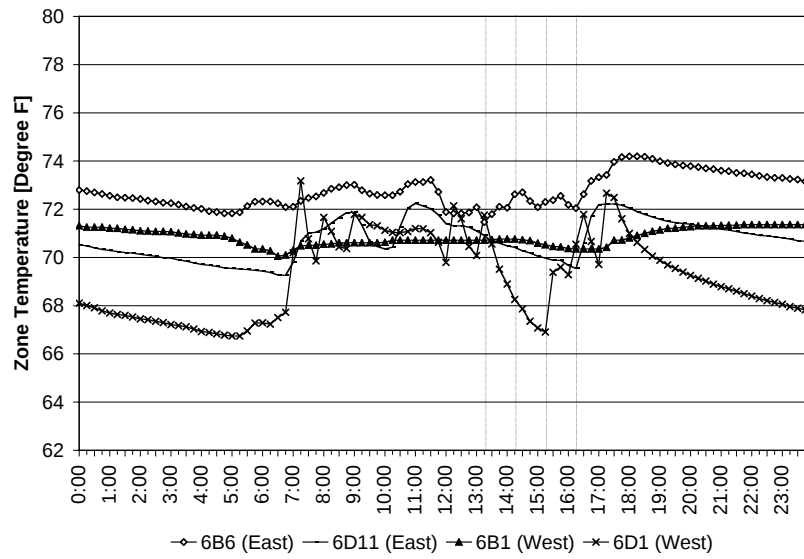


Figure VII-16. GSA – North Tower 6th Floor Zone Temperature

Most of zone temperatures on North 12th floor increased during the shed (Figure VIII-16). However, they changed gradually and didn't show clear setpoint staging based on the price signal.

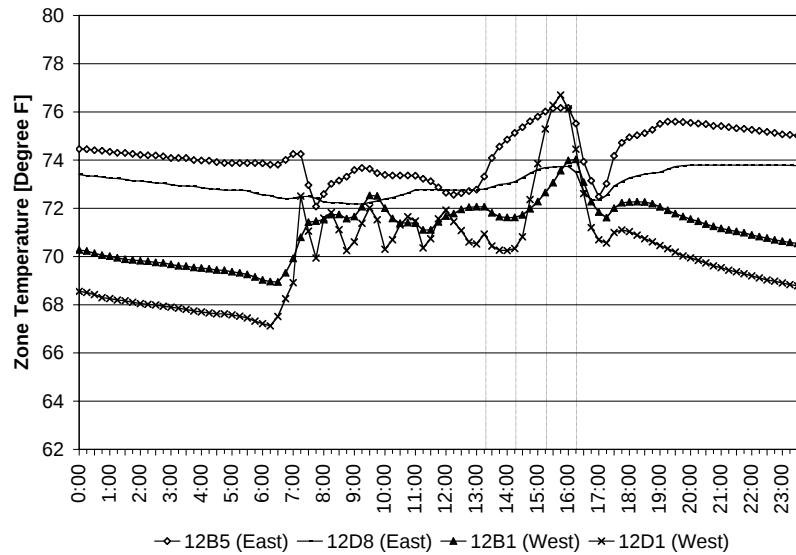


Figure VII-17. GSA – North Tower 12th Floor Zone Temperature

Zone temperatures on the North 16th floor increased during the shed, but didn't reach the assigned setpoint (Figure VIII-17).

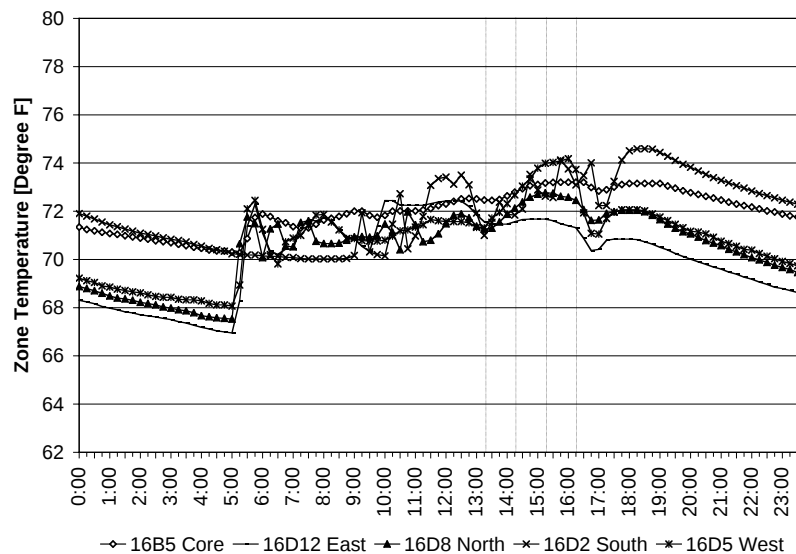


Figure VII-18. GSA – North Tower 16th Floor Zone Temperature

Zone 17D1's temperature on North 17th floor clearly changed based on the setpoint changes (Figure VIII-18). The rest of the zone temperatures changed gradually. Some of the zone temperatures may have increased because of solar gain.

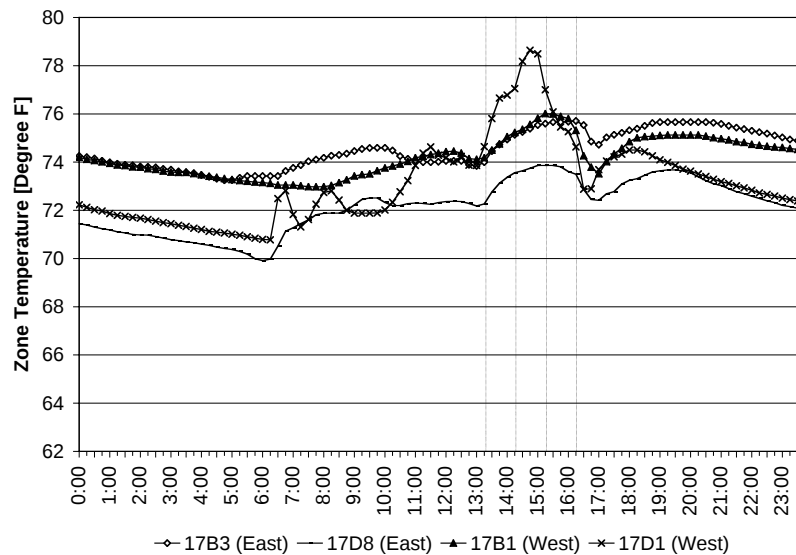


Figure VII-19. GSA – North Tower 17th Floor Zone Temperature

Zone 2D1's temperature on the South 2nd floor increased during the shed (Figure VIII-19).

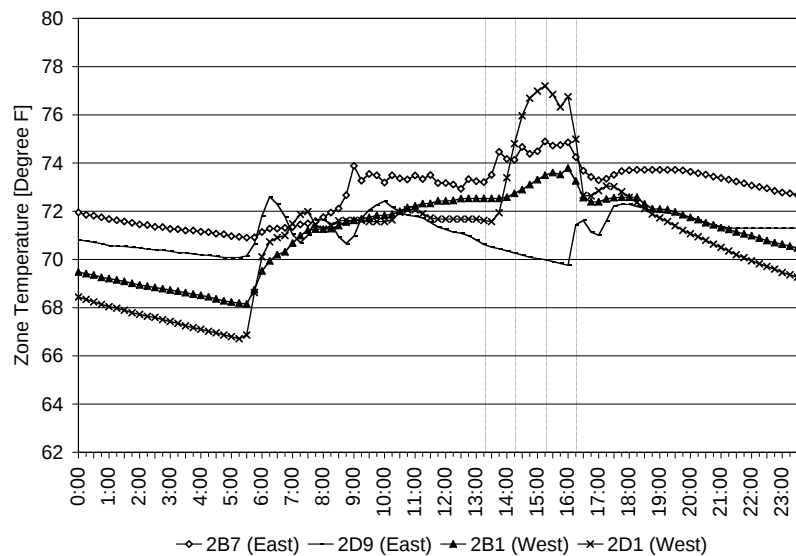


Figure VII-20. GSA – South Tower 2nd Floor Zone Temperature

Zone temperatures on the South 4th floor did not change based on the price signal (Figure VIII-20). The temperature of the west-facing zone (4D6) increased, possibly due to solar gain.

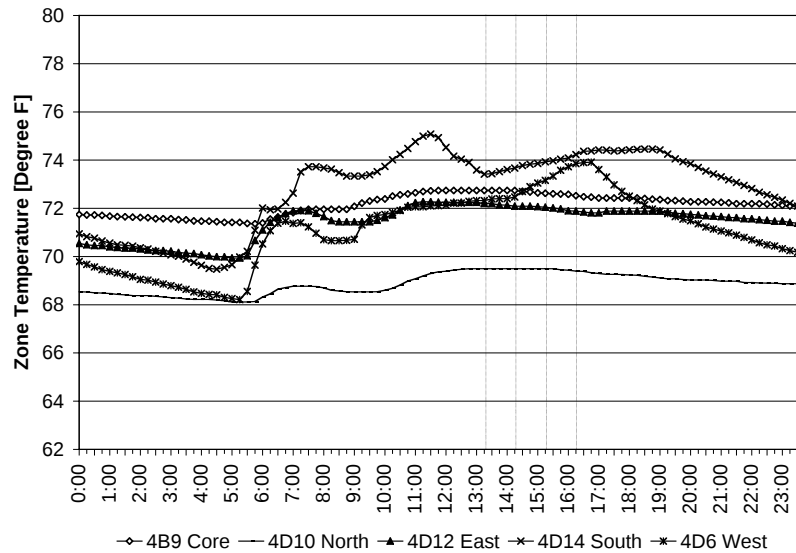


Figure VII-21. GSA – South Tower 4th Floor Zone Temperature

The south-facing zone temperatures on South 16th floor (16D11) clearly changed based on the price signal (Figure VIII-21).

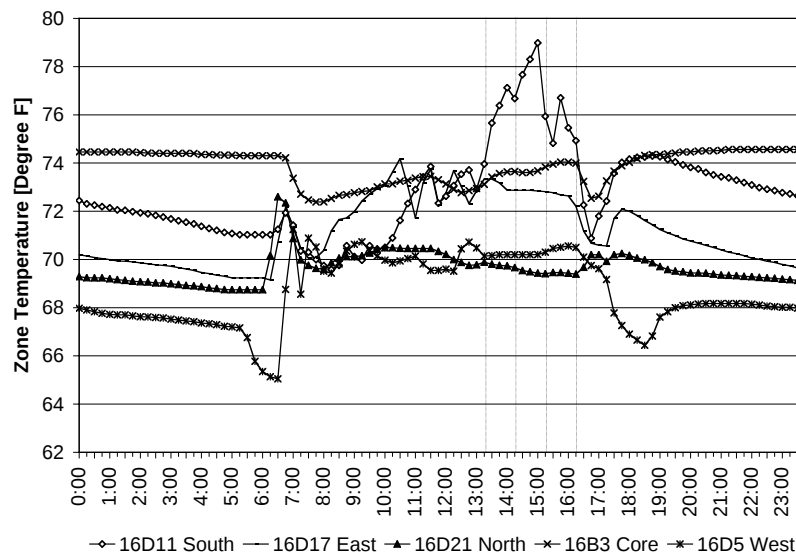


Figure VII-22. GSA – South Tower 16th Floor Zone Temperature

VAV Damper Positions by Floor

The VAV damper positions on the North 4th floor were not affected by the price signal, possibly due to the minimum damper position setting (Figure VIII-22).

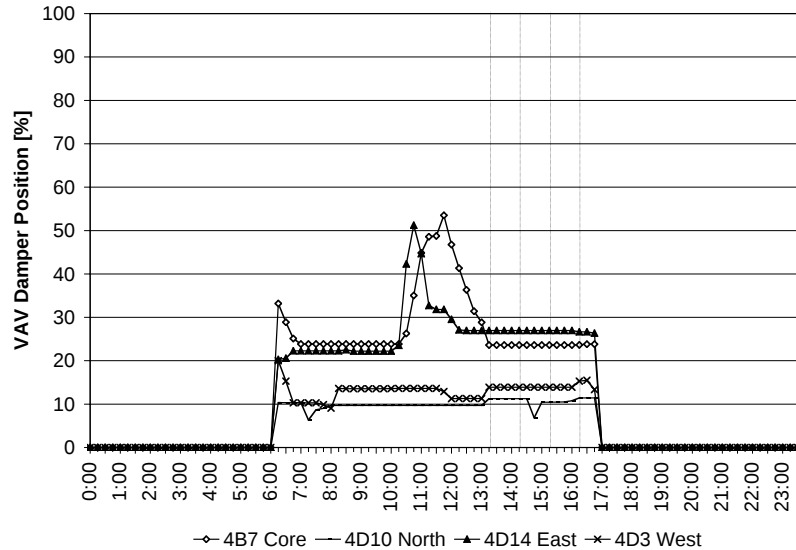


Figure VII-23. GSA – North 4th Floor VAV Damper Position

The VAV damper positions on the North 16th floor seemed not to be affected by the price signal (Figure VIII-23). The PI parameter (proportional integral) setting of the south-side zone (16D8) may need to be calibrated.

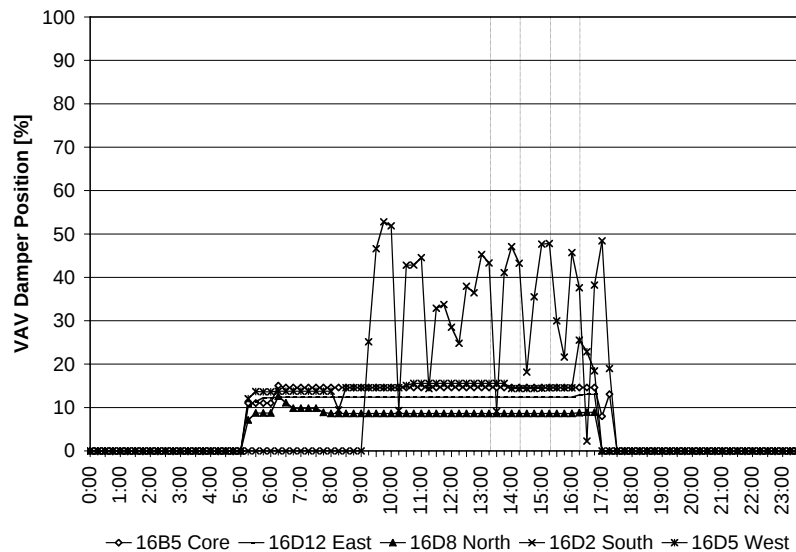


Figure VII-24. GSA – North 16th Floor VAV Damper Position

The VAV damper positions on the South 4th floor were not affected by the price signal (Figure VIII-24).

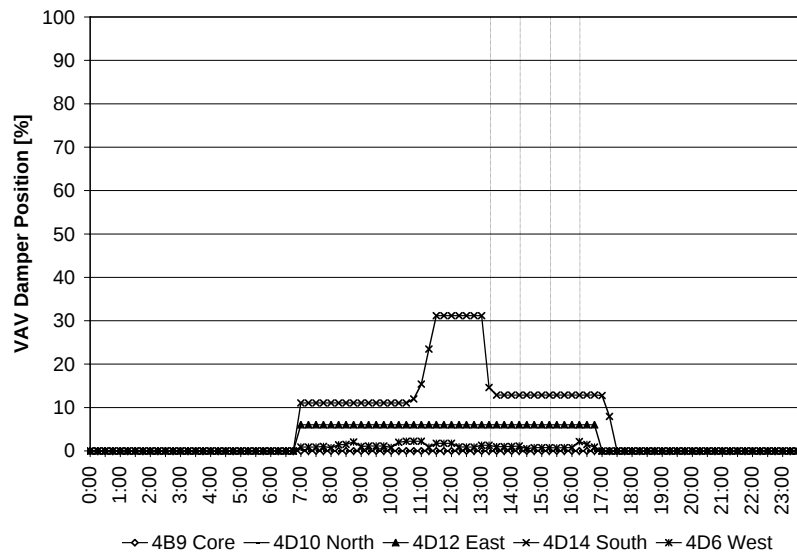


Figure VII-25. GSA – South 4th Floor VAV Damper Position

The south-side zone (16D11) VAV damper on South 16th floor changed its position to maintain the zone temperature setpoint which was changed based on the price signal. The core zone (16B3) damper position seems reduced due to the zone setpoint increase.

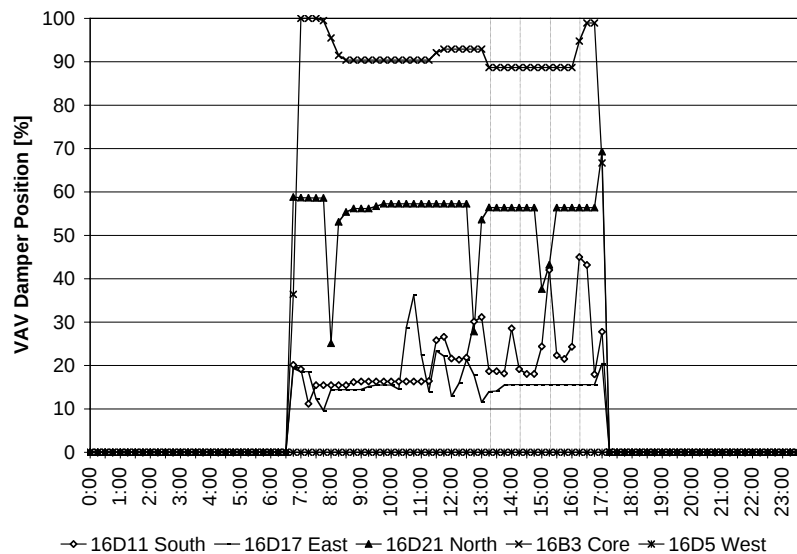


Figure VII-26. GSA – South 16th Floor VAV Damper Position

Appendix VII-4. Roche – Additional Figures

Individual Building Power and Baseline

OAT regression model baselines were developed for each building at the Roche site. Building A2 fan power savings could be clearly identified in the whole building power. The standard error range shows the building might have had irregular nighttime operations over the previous days.

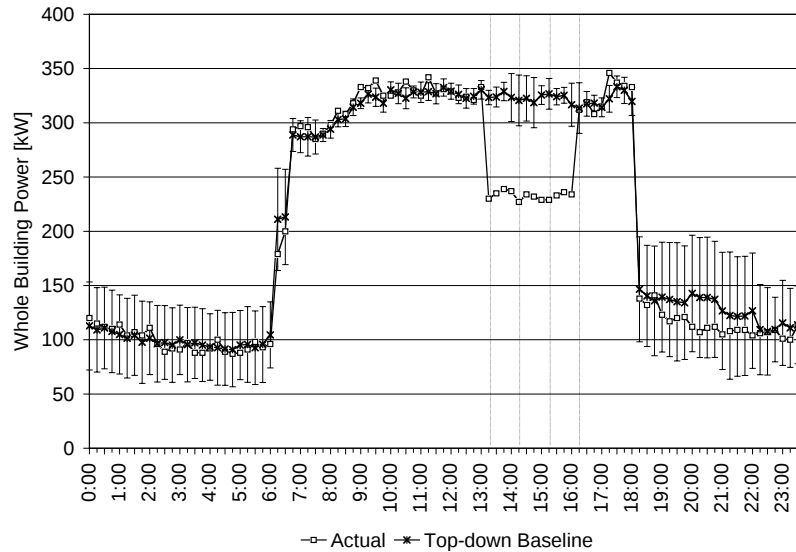


Figure VII-27. Roche – Building A2, Whole Building Power and Baseline

The Building SS operational pattern was changed on October 30th, and the demand reduced approximately 50 kW during the afternoon (Figure VIII-27). The regression model shows higher demand than the actual demand seen on the test day because the model is affected by the demand prior to October 30th.

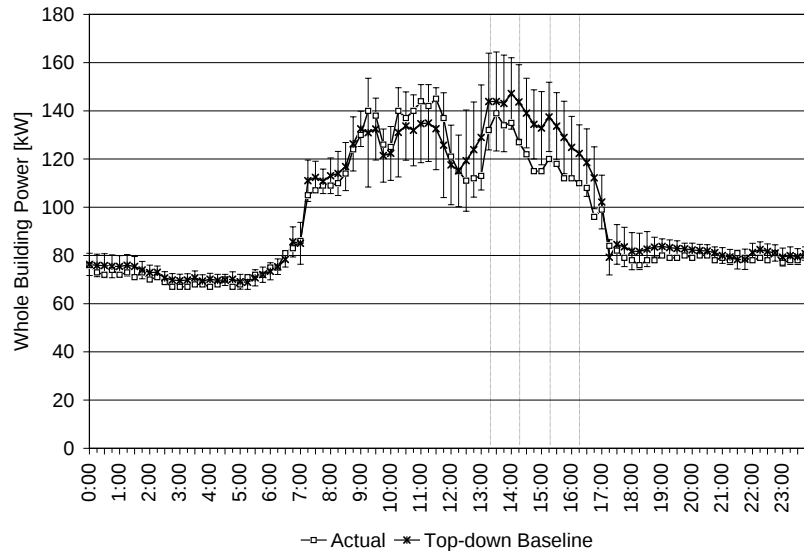


Figure VII-28. Roche – Building SS, Whole Building Power and Baseline

Building FS' power demand fluctuated because of electric cooking appliance use (Figure VIII-27). The spiking demand was averaged in the baseline model. Clear demand savings were obtained during the \$0.75/kWh period.

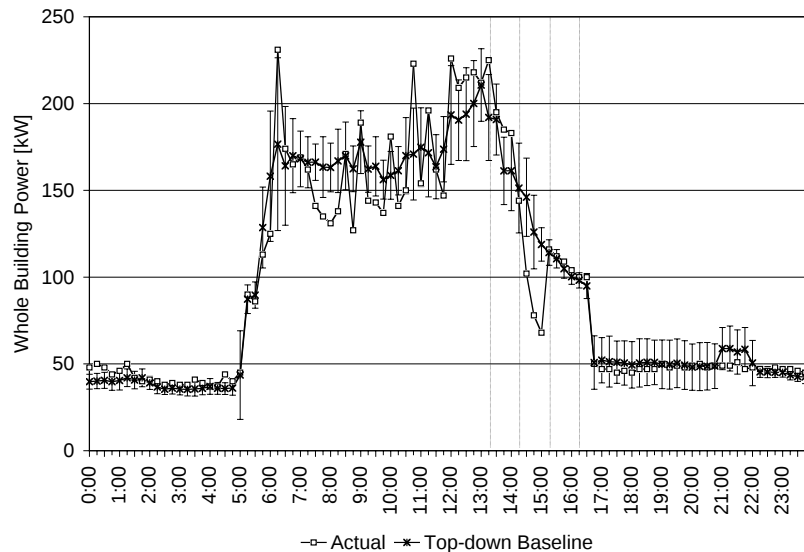


Figure VII-29. Roche – Building FS, Whole Building Power and Baseline

Appendix VII-5. UCSB – Additional Figures

Components Power and Baseline

Cooling power dropped significantly at the beginning of the \$0.75/kWh period because of the cooling valve close strategy (Figure VIII-29). However, the cooling power demand spiked up at the end of the shed period and was greater than the baseline demand for that time period.

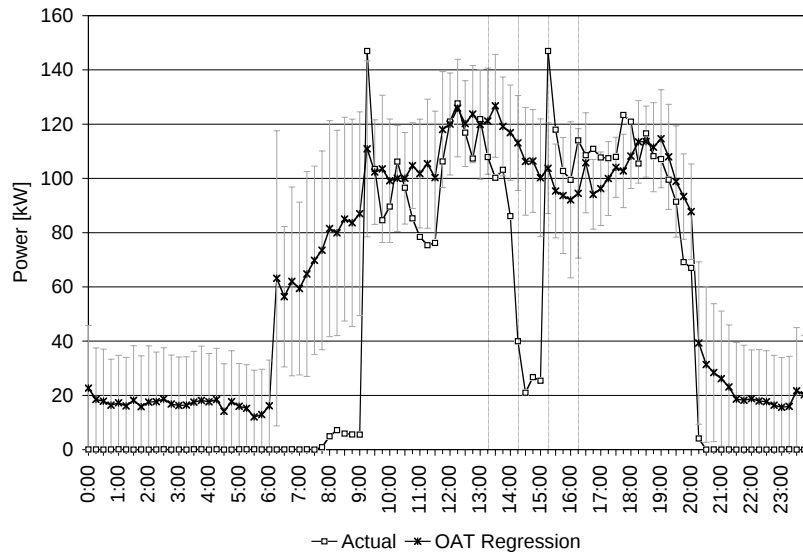


Figure VII-30. UCSB – Cooling Power and OAT Regression Baseline

Although an OAT regression model was developed for the fan power, the predicted demand from the model was much lower than the actual demand around the shed period (Figure VIII-30). An alternative baseline was developed for use in determining the fan power demand savings.

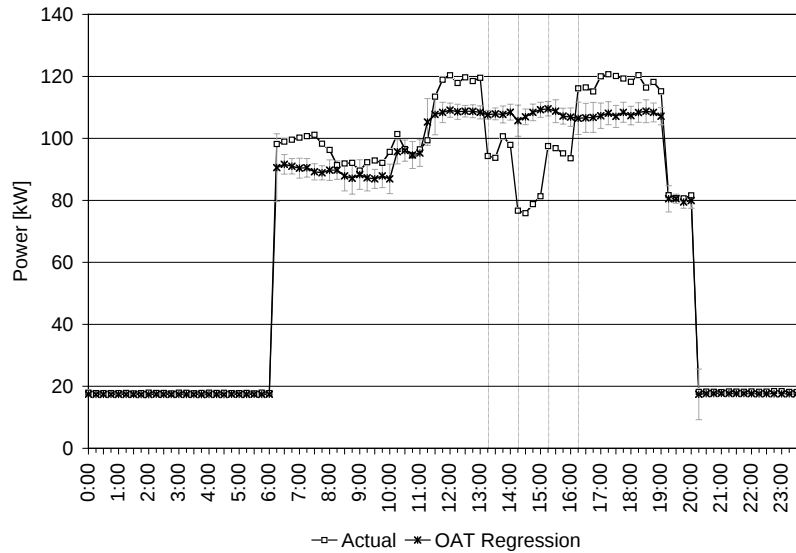


Figure VII-31. UCSB – Fan Power and OAT Regression Baseline

All of the supply fans have VFD but operated at constant volume except for the Library III – Supply Fan #2, which was operated in variable load. Because of this, the OAT regression model was applied only to this fan. Although this fan was assigned to limit the VFD% based on the price signal, it didn't change the operation. The fan power shows that the demand spiked twice during the shed period (Figure VIII-31).

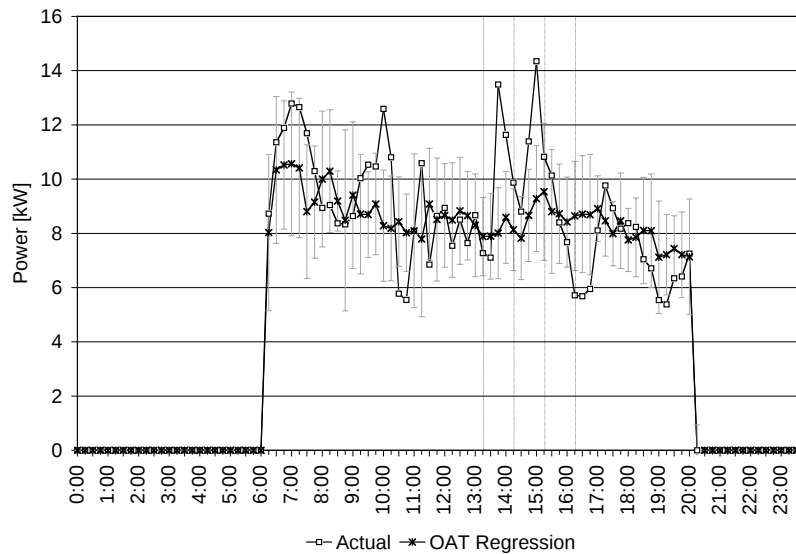


Figure VII-32. UCSB – 3S2-SF Demand and OAT Regression Baseline

Zone Temperatures

Most zones in the library didn't show noticeable temperature changes during the shed (Figure VIII-32 through VIII-34). Several zone temperatures at Library II increased two to three degrees F when the cooling valve was closed.

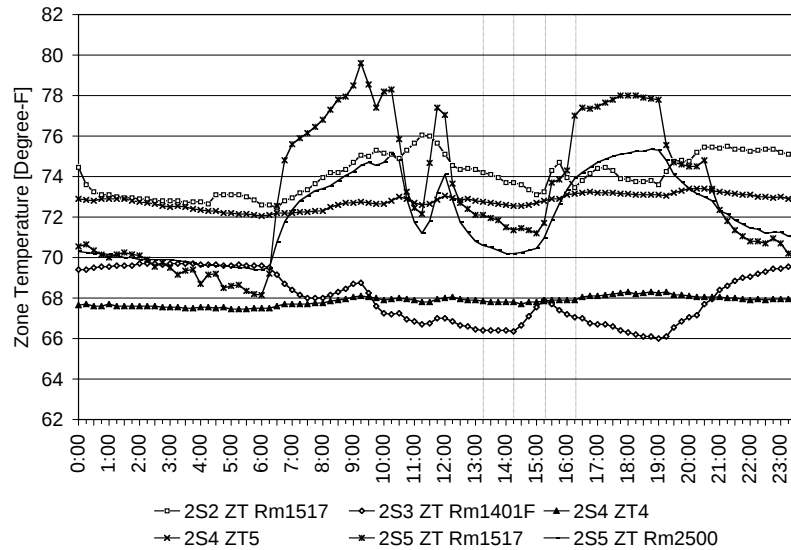


Figure VII-33. UCSB – Library II, Zone Temperatures

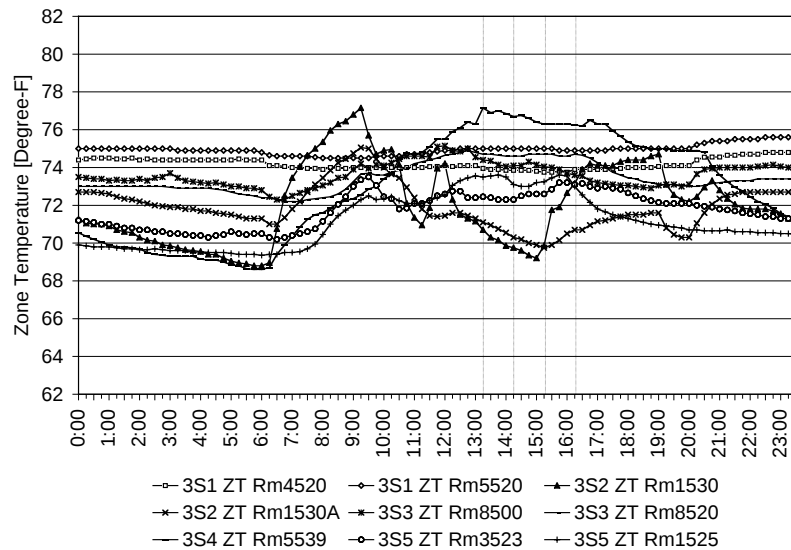


Figure VII-34. UCSB – Library III, Zone Temperatures

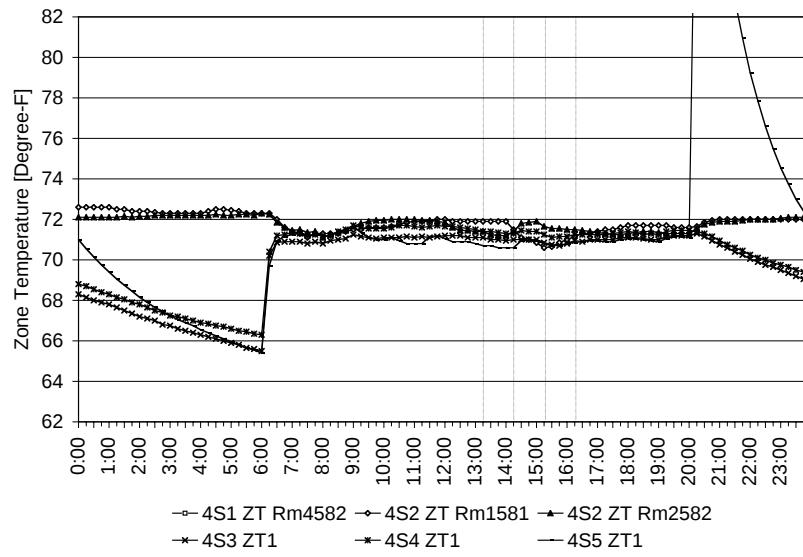


Figure VII-35. UCSB – Library IV, Zone Temperatures

Appendix VIII. Previous DR Participation and Site Contact

Appendix VIII-1. Prior Demand Response Program Participation

One of the selection criteria for participation in the LBNL tests was that each site must have demonstrated a DR capability through some DR program. Table VII-1 summarizes the programs participated, size of the curtailment capability—estimated and demonstrated.

Table VIII-15. Demonstrated Demand Response Capability of the Test Participants

Sites for final test		Estimated Curtailment Capability (1)	Demonstrated Curtailment Capability (1)	Pilot Test Date (1)	Participation into DR Programs
Albertsons	Supermarket	6.8 MW for 264 sites	5.4 MW for 264 sites	10/29/2001	CEC Peak Load Reduction Program--Demand Responsive Building Systems Element (SB5X): Subelement 2
BoFA	Low-rise Office Building	2.8MW for 78 sites(2)	2.2 MW for 78 sites, 2.4 MW for 81 sites (3 sites added in 2003) (3)		CEC Peak Load Reduction Program--Demand Responsive Building Systems Element (SB5X): Subelement 3. WebGen was the contractor for the award.
GSA-Oakland Federal Building	Office	800 kW	800 kW (shed coordinated with SF Federal building, total of 1.2 MW from 2 M sqft)		Performed during the CAISO DRP Event on July 3, 2001.
UCSB	University Campus Building	1 MW	1.1 MW	7/28/2001	CEC Peak Load Reduction Program--Demand Responsive Building Systems Element (SB5X): Subelement 2. Performed during the CAISO DRP Event on July 3, 2001.
Roche Pharmaceuticals	Manufacturing Facility	1.2 MW for 21 sites	2.5 MW for 21 sites	9/28/2001	CEC Peak Load Reduction Program--Demand Responsive Building Systems Element (SB5X): Subelement 2. Also participated in the "Cash for Kilowatts" Program. (Offered 1.5MW within 20-minutes and delivered 2MW.)
Sites considered but not in final test					
USPS	Mail Distribution Center	4.76 MW for 24 sites	The test during Summer 2002 was not successful.	May-02	CEC Peak Load Reduction Program--Demand Responsive Building Systems Element (SB5X): Subelement 2

(1) Nexant. 2002. *AB 29x and SB 5x Program Evaluation: First Quarter Report (Jan 1 to March 1, 2002)*. Page 20.

(2) Communication with Don Rudy of JLL (3/11/2003)

(3) Communication with John Bidwell of Nexant (3/11/2004).

Albertsons

Albertsons participated in the Peak Load Reductions Program—Demand Responsive Buildings System Element as a Grantee. Albertsons participated to this program with 264 of their supermarket facilities in California. They estimated a DR capability of 6.8 MW and they were able to demonstrate load reductions of 5.4 MW at these facilities during the pilot test on October 29, 2001. The response mainly comes from reductions in anti-sweat heater energy and case lighting.

Bank of America

Bank of America participated in the Peak Load Reductions Program—Demand Responsive Buildings System Element with WebGen as the Small Commercial Contractor. Bank of America participated to this program with 81 of their facilities in California. They estimated a DR capability as 2.8MW (for the initial 78 facilities—3 were added to the set in 2003) and they were able to demonstrate load reductions of 2.2 MW for the 78 original facilities (2.4 MW for the 81 facilities). The response mainly came from HVAC measures.

Oakland Federal Building (GSA) and 450 Golden Gate, SF (GSA)

The Oakland Federal Building (Ronald Dellums Federal Building) participated in the California Independent System Operator's (ISO) 2001 Summer Demand Reduction Program (DRP) together with the Philip Burton Federal Building in San Francisco (450 Golden Gate, SF). The demand reduction target for these two buildings was 1.2 MW. Only one curtailment (July 3, 2001) was called during the program duration (June 1 to September 30). According to ISO, 780 kW (65% of the target) was shed. However, the baseline calculation used by the ISO does not take into account the effect of temperature variation on energy use in commercial buildings. LBNL estimated that if a baseline model that accounted for temperature was used, the calculated shed would have been 120% of the target.

University of California, Santa Barbara

UCSB participated in the California Independent System Operator's (ISO) 2001 Summer Demand Reduction Program (DRP). Infotility was the load aggregator facilitating the participation. July 3rd was the only DRP event that summer. The results of the Demand Relief Program (DRP) implementation for July 3rd, 2001 from 2:00 p.m. to 6:00 p.m. show that the demand reduction was 60% of the target of 1MW. The ISO calculation for reduction is based on the previous 10 normal, non-curtailed weekdays. This baseline calculation was revised because it is not adjusted for weather conditions. July 3rd was an abnormally hot day compared to the previous weeks. The average cooling degree-days per day for the ten-day baseline was 3.7 CCD versus 6.2 CCD for July 3rd. Using the temperature-adjusted baseline, the demand reduction is calculated to be 1.1MW.

UCSB also participated in the Peak Load Reductions Program—Demand Responsive Buildings System Element as a Grantee. They estimated a DR capability of 1MW and they were able to demonstrate load reductions of 1.1 MW at these facilities during the pilot test on July 28th, 2001.

Roche Pharmaceuticals

Infotility has been working with the site in a PIER research project to test communications capabilities of the Infotility XML electricity price server. Roche participated in the CEC "Cash for Killowatts" program. They offered a reduction of 1.5MW within the 20-minute window that is required by the program. They were able to curtail more than 2 MW within 20-minutes of request. This qualified them for a significant grant from CEC. In addition to this they received multiple rebates from local energy provider (City of Palo Alto) for demand limiting. Three buildings at the site were chosen for the demonstration. The building chosen are A2 (administration, auditorium 101,078 ft²), SS (facility management office 67,862 ft²), and FS (cafeteria 23,159 ft²). The central plant located in the campus provides cooling energy to the buildings. Laboratory buildings were avoided for the demonstration because their airflow and indoor air quality are more carefully controlled. The buildings chosen are non-critical areas where are expected to have relatively fewer complaints.

Roche participated in the Peak Load Reductions Program—Demand Responsive Buildings System Element as a Grantee. Roche participated to this program with 21 of their facilities in California. They estimated a DR capability of 1.2 MW and they were

able to demonstrate load reductions of 2.5 MW at these facilities during the pilot test on September 28th, 2001.

United States Postal Service (USPS)

USPS participated in the Peak Load Reductions Program—Demand Responsive Buildings System Element as a Grantee. USPS participated to this program with 24 of their facilities in California—mostly distribution centers. They estimated a DR capability of 4.76 MW. The pilot tests of May 2002 were not successful primarily because the test days were cool and there was minimal cooling demand. The main DR response in these facilities was planned reduction of chiller power mainly by reducing the service level at the facility.

Appendix VIII-2. Interaction with Site Contacts

Albertsons

LBNL first contacted Albertsons Supermarkets in February, 2003 in an effort to recruit them to participate in the DR test. Our negotiations took many months. LBNL's communications with them was delayed by the time required to finalize the XML signal specifications and associated software requirement. Another reason for the delay is the complicated corporate structure. We tried to contact Invensys to secure the technical development for the communications. We later found out that Elutions was fully acquired by Engagenet and we needed to work with them. Our main contact at Engagenet resigned during our lengthy discussions with them leaving us where we started. During our effort to secure a site we worked with Albertsons, Engagenet, Elutions, and the Albertsons local management.

During September and October activities were in two areas:

- (1) We worked on securing a specific site, convincing the store management that the tests would not be too disruptive and working with the store management to develop a two level response strategy. The building selected for the test is 3000 East 9th St. in Oakland. The first site that was nominated for the test was not a good site because the whole-building electric meter was not connected to the EIS. We also needed to work with Albertsons in making hardware modifications at the site to facilitate the communication between EIS and the controls.
- (2) We worked with Elutions/Engagenet for the connectivity and communication between Infotility and the EIS. For this, we needed to procure services from Infotility too.

Bank of America

LBNL has been in communication with WebGen for more than one and a half years. WebGen staff visited LBNL while LBNL was conducting a review of Energy Information Systems and we have been in several meetings where they demonstrated their products to us. Through WebGen, we contacted Jones Lang LaSalle (JLL) who is the property manager for many of the Bank of America (B of A) buildings in California. We had a meeting with JLL in early March 2003 where we identified possible buildings. Bank of America was very motivated to participate in our test.

Bank of America has 78 buildings that have DR capability facilitated by WebGen. Most of the buildings are branch offices. There are four buildings that are not branch offices and they vary in size from 100,000 ft² to 500,000 ft². As a result of our meetings with B of A, we identified the 500,000-ft² building in San Francisco as our primary candidate. This San Francisco building is equipped with a Honeywell Energy Management Control System (EMCS). As mentioned above, the EIS on top of this system is WebGen. The San Francisco office was Webgen's first experience connecting to a Honeywell system. We were initially concerned that this may pose a problem because when the building was recruited for the project, the gateway connectivity had not been completed. During

August, 2003 we were informed that the connectivity was completed and the testing could proceed.

In early September, 2003, JLL and Webgen informed us that the San Francisco office building was being sold. Webgen and JLL selected the B of A's Concord Technology Center (CTC) for the study. The CTC consists of 4 large buildings with about 1 million ft² of space. Webgen links to a Trane Trace EMCS, and the linkage has been completed. We visited the site on September 10. During this meeting one of the four buildings (Building B) was selected as the site that would be monitored. The response strategy, the monitoring and verification methodology, and other issues related to communications were discussed.

During the following weeks, we were in contact with the building operators. We worked with them during the installation of our short term metering equipment. The building operators also provided us with data from the Trane system to complement data from Webgen and our own short term metering.

During late September and October WebGen completed software upgrade to accept the XML signals from Infotility, submetering was installed to verify our ability to measure the shed strategy, the list of Trane data points to be monitored were identified and LBNL obtained Webgen data files to ensure we can analyze the test results.

Bank of America, JLL, and WebGen chose a site in Concord which has four buildings (A, B, C and D) used for office and data center. Building D is a data center, and has the central cooling plant which supplies chilled water to all the four buildings. The other buildings are offices. Building B was chosen for the test, because it had no known problem such as over heating or solar gain problems.

Oakland Federal Building (GSA) and 450 Golden Gate, SF (GSA)

LBNL has been working with this building for several years. One project consisted of an energy assessment using EMCS trend logs, which resulted in a paper at the National Conference on Building Commissioning. A second study was conducted to assist in the development of the DR strategies. LBNL is also partnering with GSA on the development of GEMnet: GSA Energy and Maintenance Network. LBNL's involvement in this site build's on the multi-year relationship and collaboration with GSA and the on-site staff.

University of California, Santa Barbara

UCSB was the subject of an LBNL study on the cost effectiveness of Energy Information Systems (Motegei et al, 2003). This study involved interviewing Jim Dewey, the energy manager, on how he uses the EIS. Multi-year energy data were collected and specific examples of building operating problems identified with the EIS.

Roche Pharmaceuticals

United States Postal Service (USPS)

LBNL has been working with USPS through funding from Federal Energy Management Program (FEMP) for almost a decade. The Electricity Markets and Policy Group at LBNL have been leading this activity to help USPS strategize energy procurement and energy-efficiency investments.

Before the DR tests during 2002, we were invited to a training session facilitated by Viron for USPC facility managers and we had a chance to meet several of the key people in this organization. At this meeting, we had a chance to introduce our project both to Viron and USPS.

In order to convince USPS to participate in our test, we offered them to provide an estimate of their potential savings under the new proposed CPP tariff. USPS provided us with real time interval data for all of their facilities. Because only PG&E provided prices on their proposed CPP tariff, we analyzed the potential savings for the West Sacramento Distribution Center that is supplied by PG&E. Unfortunately our analysis did not show significant savings—especially with the delayed start day of the CPP tariff. Table VI-2 indicates that if the tariff had been available, it would be beneficial for the facility to participate. Even without any action, their gain would be around \$6000. With a response of about 5%, they could have increased this benefit to about \$9000. However, these profits would diminish and serious losses would take place with a delay of the program to June.

Table VIII-16. The benefits of participating in CPP tariff for a USPS distribution center in West Sacramento using load profiles from 2002(\$)

	May	June	July	Aug	Sept	Oct	Total	
							June to Oct	May to Oct
No Action	18153	16794	-14676	-32926	924	17445	-12440	5714
5% Curtailment on CPP days during CPP on-peak hours	18153	16794	-13590	-31289	1464	17445	-9175	8978

Note: CPP days were selected as the 12 days with the highest California ISO system load in 2002

In a further attempt to secure their participation, we contacted Viron to explore the possibility of synchronizing our tests with the tests USPS/Viron needed to perform during the summer as part of the Peak Load Reduction Program. At that point, Viron was very motivated to incorporate the software developed by Infotility in their system to receive XML price signals. We provided Viron with the preliminary specification of the XML signal and their technical group began working on this issue. Viron was going to help us pick the most suitable site out to the 24.

Because of LBNL's long relation with USPS, we have extensive information on each site. As mentioned, we also were given access to interval near-real-time data on all of their facilities that are of interest to us. LBNL made great progress in discussions with USPS and Viron. A postal distribution center in San Jose was selected for the test

because the on-site staff was supportive and interested in DR. Numerous discussions were made with USPS and the MOU was signed.

During late summer, Chevron Energy Services purchased Viron. We continued numerous discussions with Bruce Dickenson, our contact at Viron. However, we were unable to proceed with the project because Chevron was upgrading the Information Technology infrastructure. They are unable to make the additional programming upgrades to the Utility Vision system at a time when the infrastructure was changing. Although USPS and Viron dropped out of the test, they are still interested in participating in any future projects.

Appendix VIII-3. Problems Encountered During Test Period

Several problems were encountered during the two-week test period, specifically before the initialization of the test on November 12th as well as before the November 19th test. During the two three-hour high price periods, signaling went smoothly except for a few minor problems. Table 4-2 summarizes the kinds of problems encountered.

Table VIII-17. Problems Encountered During The 2-Week Test Period

	Albertsons	B of A	GSA	Roche	UCSB
Tuned into wrong channel	✓	✓			
Not confirming	✓		✓		
Signaled unsuccessful data transfer					✓
Time stamp discrepancies			✓		
Programmed delay in confirmation signal			✓		
Action premature (before price in effect)	✓	✓	✓	✓	✓
Signal confirmed > 2 minutes from time published			✓		

All of these problems are start-up problems and could be eliminated with proper commissioning. We do not anticipate that these will cause long term issues and/or bottlenecks. The rest of this section provides a more detailed accounting of these problems. One issue to note is that all of these problems were resolved before the second Auto-DR test on November 19th, 2003.

Albertsons

Polling wrong channel. A private test channel was set-up for each site for use prior to the official test window. During the official test window, the sites switched over from their private test channel to the official LBNL “production” channel. Albertsons polled their private test channel in addition to the production channel until November 12th at 12:45 pm. LBNL observed this discrepancy and the problem was corrected minutes before the first Auto-DR test.

Not Confirming. During the two-week test period, 110 signals were not confirmed. The signal was not confirmed once at 10:30 pm on November 13th. Confirmation stopped totally between November 17th at 4:15 p.m. and November 19th at 9:00 am. See Table 4-3 for part of this time period’s communication log. Corrections were made just before the second Auto-DR test.

Table VIII-18. Signal Not Being Confirmed - Albertson

<u>ChannelID</u>	<u>Channel Description</u>	<u>UserID</u>	<u>UserName</u>	<u>When requested by user</u>	<u>Timestamp [asc]</u>	<u>Price sent by server</u>	<u>Price returned by user</u>	<u>When returned by user</u>
1233	Price_LBNL1	397	albertsons,cpu1_	11/19/2003 8:47:10 AM	11/19/2003 9:00:00 AM	0.1		
1233	Price_LBNL1	397	albertsons,cpu1_	11/19/2003 9:02:09 AM	11/19/2003 9:15:00 AM	0.1	0.1	11/19/2003 9:20:27 AM

Bank of America

Polled wrong channel and premature action. The Bank of America site tested their systems on the afternoon of November 1st. Although the test started at 6:00 pm on November 11th they did not start to listen to any channel until 7:00 am on November 12th. At that point they started sending requests to their own test channel and not the LBNL-channel. The problem was corrected at 8:30 am on November 12th when they started requesting to the proper test channel.

GSA

Not confirming, time stamp discrepancies, programmed delay in confirmation signal, action premature and signal confirmed > 2 minutes. On three separate days over the two week test period, a total of 35 signals were not confirmed by the GSA system: November 11th (9:45 am to 5:30 pm), November 12th (1:45 pm when the signal switched to \$0.30/kWh and 3:15 pm when the signal was \$0.75/kWh), November 18 (10:15am), and November 21st (11:00 am). At the beginning of the two week test period, the GSA confirmation stamp was about an hour later than the time stamp of the signal and receipt time stamps. This problem was due to the time difference between the different servers involved and was corrected on November 11th at 5:30 pm. Signals were confirmed in greater than two minutes from the time they were published, until approximately the time when the price took effect—13 to 15 minute delay from the time the signal was received.

Roche

No problems were noticed during the two-week test period. Signals were requested in less than two minutes from the time they were published. Signals were confirmed within two minutes from the time they were requested.

UCSB

Thirteen ***Unsuccessful data transfer and action premature.*** Signals were received incorrectly during the two week test period, some on November 10th and some on

November 11th (See Table 4-4). The problem was corrected by 11:00 am on November 11th.

Table VIII-19. Participant Returning Wrong Value for the Signal - UCSB

<u>ChannelID</u>	<u>Channel Description</u>	<u>UserID</u>	<u>UserName</u>	<u>When requested by user</u>	<u>Timestamp [asc]</u>	<u>Price sent by server</u>	<u>Price returned by user</u>	<u>When returned by user</u>
1233	Price_LBNL1	385	ucsb,cpu1_	11/10/2003 9:30:43 AM	11/10/2003 9:45:00 AM	0.1	-1	11/10/2003 9:46:05 AM
1233	Price_LBNL1	385	ucsb,cpu1_	11/10/2003 9:46:05 AM	11/10/2003 10:00:00 AM	0.1	0.1	11/10/2003 9:47:07 AM